

Ŧ	G	нт — — — — — — — — — — — — — — — — — — —	m	0



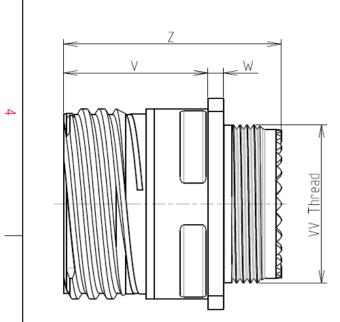

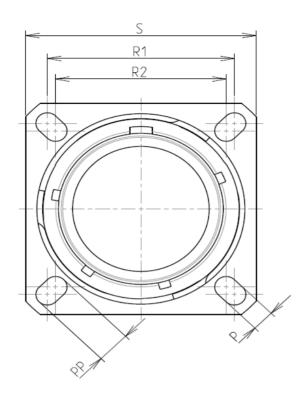

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel		
N	-Shell Plating	: Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
	-Delivered without Souriau contacts			
	-Temperature Range	65°C to +200°C		
	-Salt Spray	: 500 hours		

: 28.56 g ± 10%

8D 0

G

11

S

02

Ρ


F

Ν L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

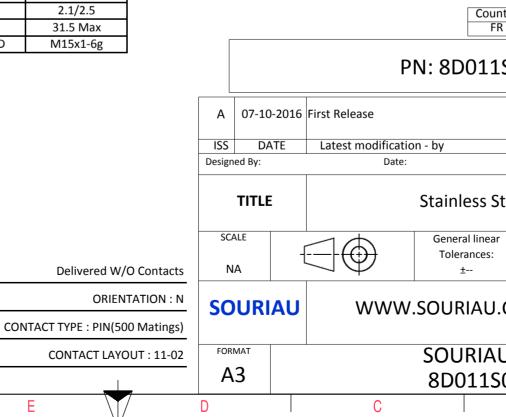

σ		A			
R				4	
AS EXAMPLE				3	
any non-confor which does not of the Parties of idation, technica	comply with or by a third p	party Control List		2	
	CUSTO	MER DRAWING	MOD N°	<u> </u>	
Steel Recep	iteel Receptacle 8D series				
ar :	NPRE	DS / PROJECT <b>859</b>			
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission				1	
U DRG N S02PNL-C			SHEET		
B	-	A		J	
-					

r	<b>工</b>	G	п –	m	D	0
		Contact Layout				Panel Cutou
4	-,	.095 (2.41mm)			Z	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	P	Contacts (Insert arrangement 11-2)           contact         Contact location (mm)         Contact location (mm)           ID         X-axis (mm)         Y-axis (mm)           A         +.095 (2.41)         +.000 (.00)           B        095 (2.41)         +.000 (.00)           ent         Number of contacts         Size contacts         Service rating iocat         Contact I           2         16         I         Al	act Ion		<u> </u>	Dim
ω						ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either of (professional recommendat
N						PN: 8D011S
					A 07-10-201 ISS DATE Designed By:	Latest modification - by Date:
<u> </u>					TITLE SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.C SOURIAU 8D011S0
L	Н	G	F	E	D	C

