
Ξ	۵	н П	m			0	Ξ	A	
		ØS							4
CHARACTERI		Keying Shown	Connector dimension			LAYOUT SHOW	IN AS EXAMPLE		3
-Shell Material -Shell Plating -Insulator -Contacts -Seals & Grom -Contact Platin -Durability	: Black Zinc Nickel : Thermoplastic : Copper Alloy net : Silicon Elastomer	mum	DimNominalØS25 MaxZ31 MaxVV THREADM15x1-6g			due to a use of the Produ the Specifications issued by e (professional recomr	nendation, technical notice.) Country Jurisdiction	vith ird party	2
-Temperature -Salt Spray — -Mass	Range <u>+</u> -65°C to +175°C : 500 hours : 18.04 g ± 10%				A 18-10-2016 ISS DATE Designed By:	Latest modification - by Date:		MOD N TOMER DRAWING	°
CONTACT TYPE SHELL SIZE : 1		L Z 05 B N	CONTACT TYPE : SOCKET(SCALE NA SOURIAU	General I Toleran ± WWW.SOURIA	AU.COM	PRDS / PROJECT 859 This document is the property of SOURIAU it must not be reproduced or communicated without permission	1
PLATING : H	Z = Black Zinc Nickel	F	CONTACT LA	YOUT : 11-05	FORMAT A3 D		IAU DRG N° 11Z05BN-C B	A SHEET	

r	Ŧ	ര	н т	m	D	0	
		Contact Layout					
4	-×_	$ \begin{array}{c} & & \\ & & \\ & \\ & \\ & \\ & \\ & \\ & \\ & $					
		+.065 (1.65) +.056 (1.42) +.113 (2.87)065 (1.65) +.000 (0.00)130 (3.30) 113 (2.87)065 (1.65) 065 (1.65) +.056 (1.42) ber of Size Service Contact Supersedes acts contacts rating location					
ω	11 -5 5	5 20 I All MS20050-5					
	-					SOURIAU shall not be liable due to a use of the Produ the Specifications issued by ei (professional recomm	ucts w ther c
N						PN: 8D5	Count FR 511
					A 18-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:	
					SCALE	General li Tolerand	ces:
-					SOURIA		
					FORMAT A3	SOUR 8D51	
L	Н	G	F	E	D	С	

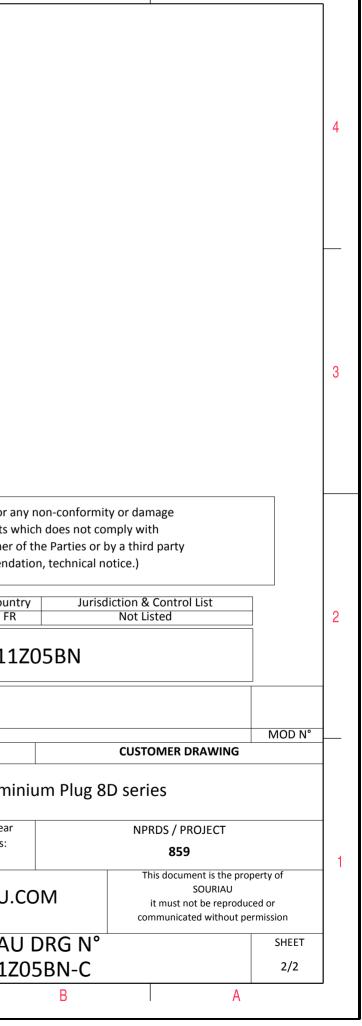

 \triangleright

σ