





Technical Data Sheet for CM29-1.9


Commercial Module for CATV & SLED Applications

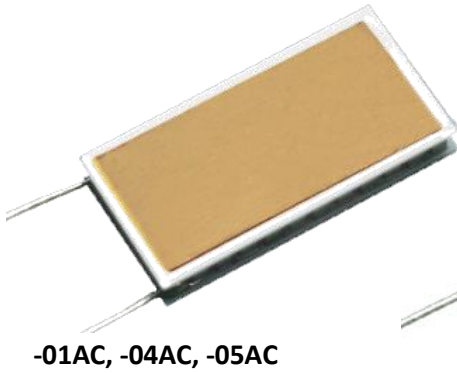

-01AC, -04AC, -05AC

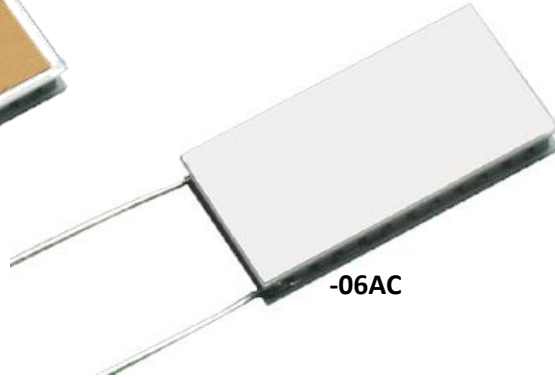

-06AC

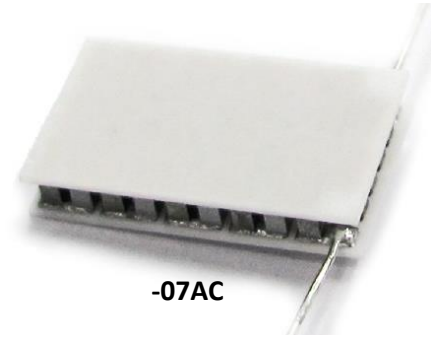

-07AC

PRODUCT FEATURES

- RoHS EU Compliant
- Rated operating temperature of 85°C.
- Maximum process temperature is 220°C.
- Ceramic Material: Aluminum Oxide
- -01AC: Au flash exterior, suitable for soldering.
- See page 2 for leadwire configurations.
- Minimum order quantity of 20 pieces.

NOMINAL PERFORMANCE IN NITROGEN

Hot Side Temperature (°C)	27	85
Δ Tmax (°C):	71	92
Qmax (watts):	4.3	5.2
I _{max} (amps):	1.9	1.8
V _{max} (vdc):	3.5	4.4
AC Resistance (ohms):	1.54	--

OPERATION CAUTIONS

For maximum reliability, storage and operation below 85°C in a non-condensing environment is recommended. To minimize thermal stress, use linear/proportional temperature control or a similar method rather than an ON/OFF method.

INSTALLATION

Recommended mounting methods: Bonding with thermal epoxy or soldering with metallized ceramics. For additional information, please refer to our TEM Installation Guide.

ORDERING OPTIONS

Model Number	Description
CM29-1.9-01AC	Top and Base Metallized Exterior
CM29-1.9-04AC	146°C Pretinned Top and Base Exterior
CM29-1.9-05AC	138°C Pretinned Top and Base Exterior
CM29-1.9-06AC	Bare Exterior
CM29-1.9-07AC	Bare Exterior

II-VI Marlow – Dallas, TX USA
214-340-4900
877-627-5691
marlow.sales@ii-vi.com

Marlow Industries Europe
GmbH - Germany
+49 (0) 6150 5439 - 403
info@marlow-europe.eu

II-VI Japan Inc.
81 43 297 2693 (tel)
center@ii-vi.co.jp
www.ii-vi.co.jp



II-VI Singapore Pte., Ltd.
(65) 6481 8215 (tel)
info@ii-vi.com.sg

Marlow Industries China, II-VI
Technologies Beijing
86-10-643 98226
info@iivibj.com




TYPICAL PERFORMANCE CURVES

ENVIRONMENT: ONE ATMOSPHERE DRY NITROGEN

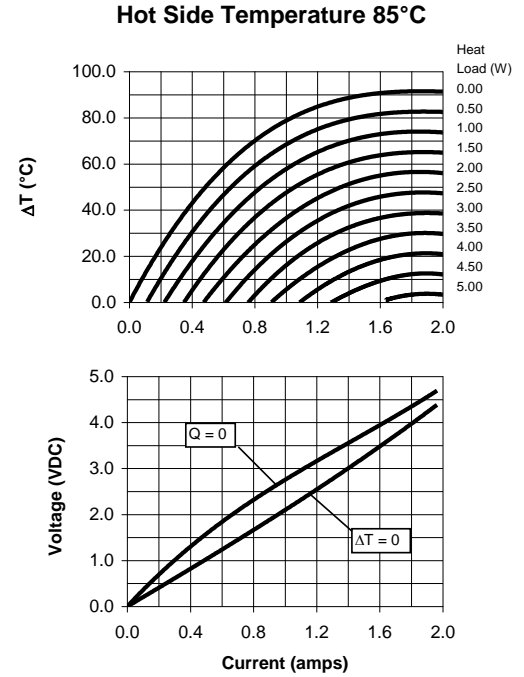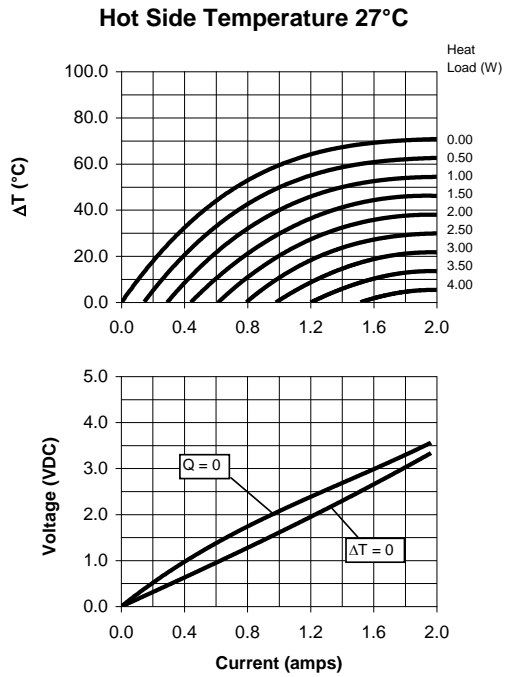

For performance information in a vacuum or with hot side temperatures other than 27°C or 85°C, contact one of our Applications Engineers at 877-627-5691.

MECHANICAL CHARACTERISTICS

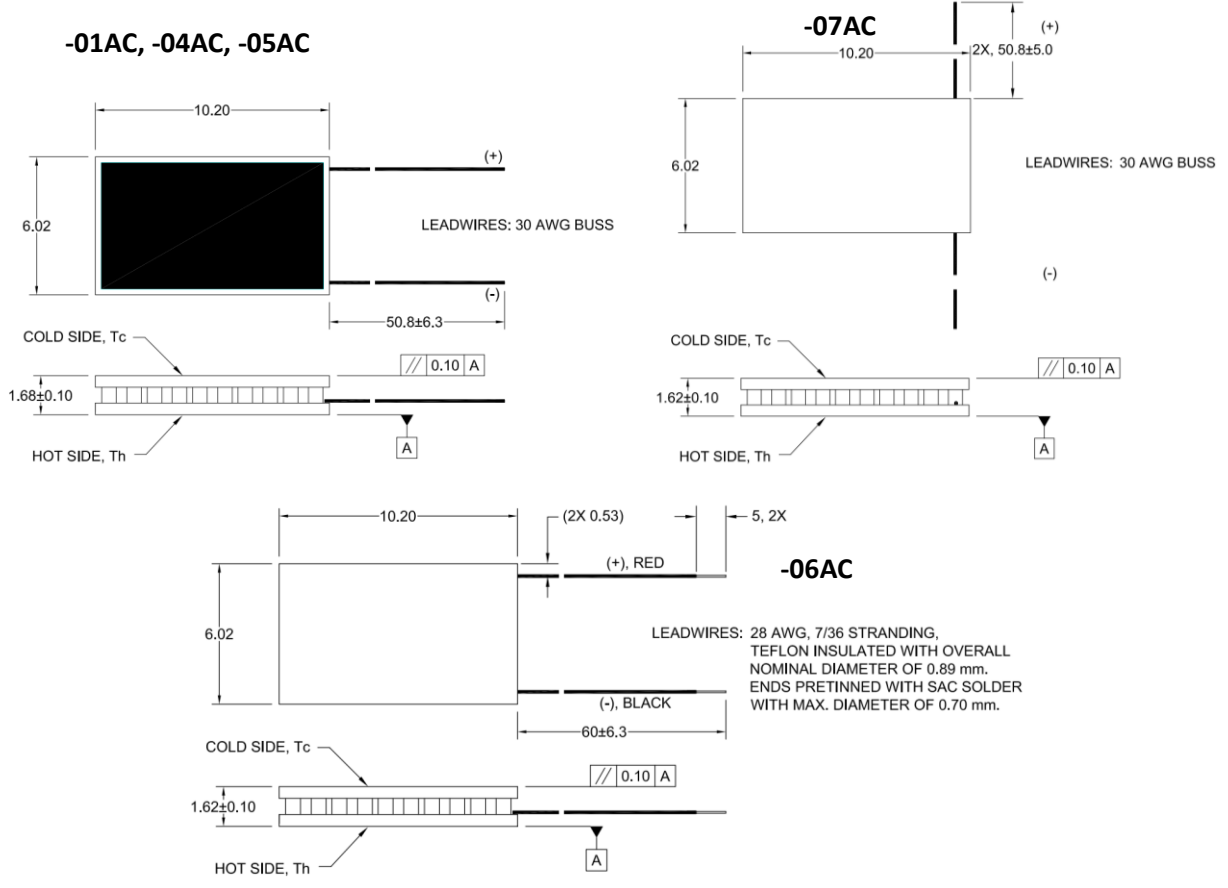

All dimensions are millimeters unless otherwise stated.

For customer support or general questions please contact a local office or visit our website at www.marlow.com.
 Marlow reserves the right to make product changes without notice.