

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.





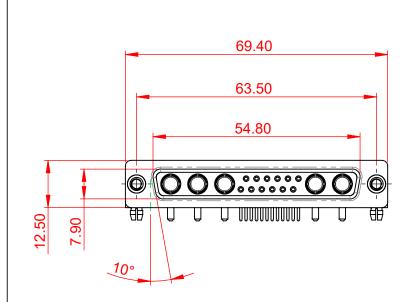



NOTES:

.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Ac rms} \\ \mbox{Insulator resistance: 5000V AC rms} \\ \mbox{$

CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/2019		
			CHECKED:	DATE:		
	EDAC INC TORONTO, ONTARIO CANADA YOUR CONNECTION TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4	
			DRAWING NUMBER: 630-17W	5250-1NB	ISSUE	
			PART NUMBER: 630-17W	5250-1NB	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. NL94V-0

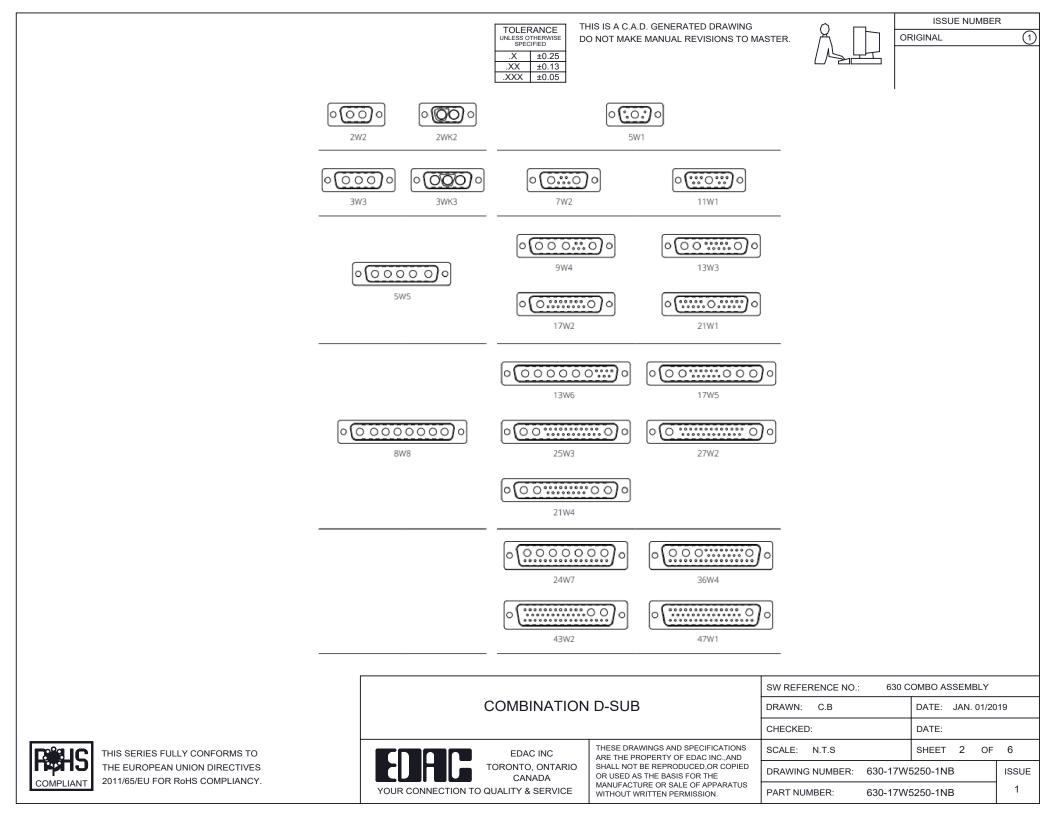



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

(1)



3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female


11W1 Male/Female



21W4 Male/Female



5W5 Male



PCB EDGE

8W8 Male



PCB EDGE



PCB EDGE


2.77

PCB EDGE

27W2 Male/Female

5W5 Female


COMPLIANT



THIS SERIES FULLY CONFORMS TO

THE EUROPEAN UNION DIRECTIVES

2011/65/EU FOR RoHS COMPLIANCY.




PCB EDGE


22.70 PCB EDGE


21W1 Male/Female




CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7














17W2 Male/Female

40A / 4.2

TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.
















13W3 Male





25W3 Male





36W4 Female



13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

24.77

23.36

13W3 Female

.X±0.25.XX±0.13.XXX±0.05

43W2 Female





17W5 Male










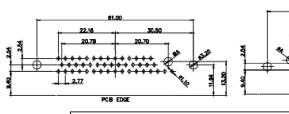




PCB EDGE

31.75

21.9



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	19
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S	SHEET 4 OF	4
	TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-17W5250-1NB		ISSUE
COMPLIANT 2011/65/EU FOR RoHS COMPLIANCY.			PART NUMBER: 630-17W	5250-1NB	1



PCB EDGE

20.7

13.72