
	m		0			
Z'	ØS					
			LAYOUT SH	IOWN AS EXAMPLE		
	Keying Shown as example					
CHARACTERISTICS-Standard : Based on MIL-DTL-38999 Series III-Shell Material: Composite-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic	Connector dimensionDimNominalØS35.7 MaxZ'31.5 MaxVV THREADM25x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)			
-Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum				Country Jurisdictio	on & Control List ot Listed	
-Durability : 500 Mating cycles -Delivered without Souriau contacts			PN: 8D517J22SNL			
-Temperature Range : -65°C to +175°C		A 14-	10-2016 First Release			
-Salt Spray : 2000 hours			DATE Latest modification - by		MOD USTOMER DRAWING) N°
		TIT		Composite Plug 8D s		
BASIC SERIES: 8D 5 - 17 J SHELL TYPE : Plug with RFI Shielding		SCALE V/O Contacts NA		eral linear lerances: ±	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact	ITACT TYPE : Standard Crimp Contact ORIENTATION : N		SOURIAU This document is the property of SOURIAU it must not be reproduced or			
SHELL SIZE : 17	CONTACT TYPE : SOCKET	YOUT : 17-22 FORMAT	SO	URIAU DRG N°	communicated without permission SHEE	ET
PLATING : J = Olive drab Cadmium		A3				

r	Ŧ	<u>م</u>	п –	m	D	0
4		Contact Layout 22				
	Ctc A B C D	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0 0 0 -4.57 -6.32 0				
	-					SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR PN: 8D517J
					ISS DATE Designed By:	Date:
<u> </u>					SCALE NA SOURIA	Compo General linear Tolerances: ± U WWW.SOURIAU.C
	Н	G	F	E	FORMAT A3	SOURIAU 8D517J2

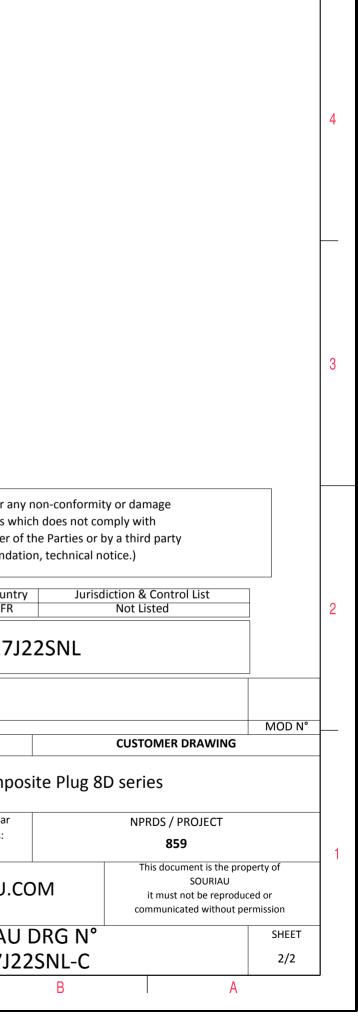

Þ

σ