
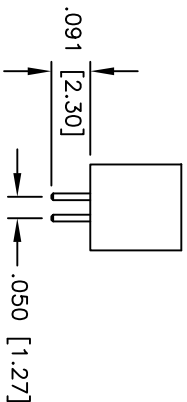
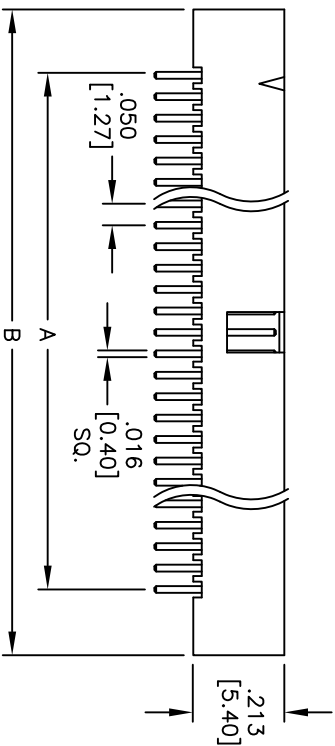
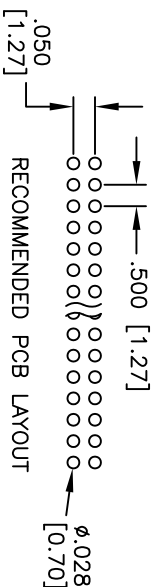


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/22/11	
A		REVISED SPEC.	8/15/14	HR/SY

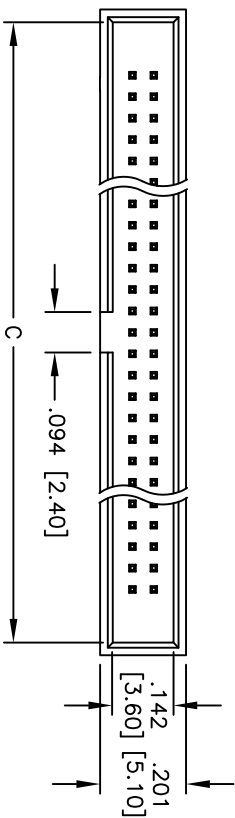

**SPECIFICATIONS:**

- Material: Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: Gold flash plated over Nickel
- Electrical: Operating voltage: 250 VAC max.
- Current rating: 1 Amp max.
- Contact resistance: 20 mohms max. initial
- Insulation resistance: 5,000 Mohms min.
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant

Positions: 6, 8, 10, 12, 14, 16, 20, 26, 30, 34, 40, 44, 50,  
 60, 64, 68, 80, 100  
 A = .050 [1.27] x No. of Spaces  
 B = .050 [1.27] x No. of Spaces + .298 [7.57]  
 C = .050 [1.27] x No. of Spaces + .239 [6.07]

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

.050" x .050" BOX HEADER  
 VERTICAL MOUNT



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	2/22/11
APPROVED	

SIZE	PART NO.	REV.
X	HBHR-B-XX-VG	A
REF: 300QATT	SCALE: NTS	SHEET 1 OF 1