

Crimp contact - CK4,0-ED-2,50ST AG - 1663242

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Turned 4.0 crimp contact, individual male contact, core diameter 2.50 mm², silver-plated



COMPLIANT

Key Commercial Data

Packing unit	25 pc
Minimum order quantity	25 pc
GTIN	 4 017918 123055
GTIN	4017918123055

Technical data

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Mechanical characteristics

Conductor cross section	2.5 mm ² ... 2.5 mm ²
Connection cross section AWG	14
Stripping length of the individual wire	9 mm
Contact diameter	4 mm
Insertion/withdrawal cycles	≥ 500

General

Note	For HC-M-3 modules
Type	Individual male contact
Series	HC-M-03
Connection method	Crimp connection
Contact type	turned

Material data

Contact material	Copper alloy
------------------	--------------

Crimp contact - CK4,0-ED-2,50ST AG - 1663242

Technical data

Material data


Contact surface material	silver-plated
--------------------------	---------------

Environmental Product Compliance

	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

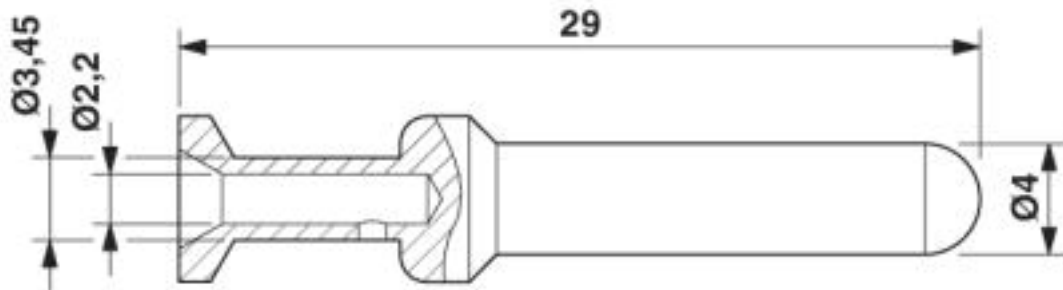

Approvals

Approvals

Approvals

EAC / EAC

Ex Approvals

Approval details

EAC	EAC	RU C- DE.AI30.B.01102
-----	------------	--------------------------

EAC	EAC	EAC-Zulassung
-----	------------	---------------

Phoenix Contact 2019 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>