

	0



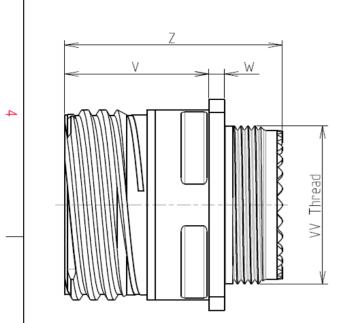

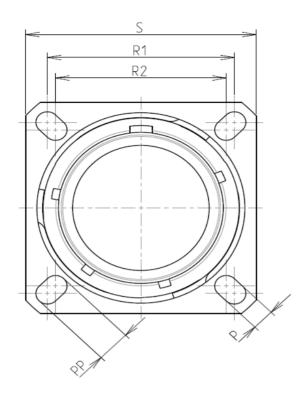

Keying Shown as example

Connector dimension

Nominal

Dim

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Standard : Based on N	/IL-DTL-38999 Series III		Dim	Nominal					
	-Shell Material	: Stainless Steel		Р	3.25±0.2			COUDIALLaball		
	-Shell Plating	: Nickel		PP	4.93±0.2			SOURIAU shall due to a us		
	-			R1	26.97			the Specification		
	-Insulator	: Thermoplastic		R2 S	24.61 33.3±0.3				sional rec	
	-Contacts	: Copper Alloy			20.83+0/-1.25			(prorest		
	-Seals & Grommet	: Silicon Elastomer		Ŵ	2.1/2.5					
N	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		Z	31.5 Max					
	-Durability	: 500 Mating cycles		VV THREAD	M25x1-6g					
		u contacts and Accessories							PN: 8	
	-Temperature Range	-65°C to +200°C								
	-Salt Spray	: 500 hours					B 11-04-17	Drawing Update		
	-Mass	: 80.87 g ± 10%					ISS DATE	Latest modificat	ion - by	
		-				D	esigned By:	Date:		
							TITLE		Stain	
	BASIC SERIES:	8D 0 - 17 S	75 S C			-	SCALE	$\square \square$	Gene	
_	SHELL TYPE : Square I				NA	$\forall \Psi$	Tole			
	CONTACT TYPE : Standard Crimp Contact				ORIEN	TATION : C	SOURIAU			
	SHELL SIZE : 17			CONTACT TYPE : SOCKET(500 Matings)					WWW.SOU	
	PLATING : S =	Nickel			CONTACT LAYO	UT : 17-75	FORMAT		SOL	
			1				A3		80	
ſ	Н	G	F		E	D		С		

URIAU shall not be liable for due to a use of the Products Specifications issued by either

0		ω		A			
						4	
LAYOUT SH	IOWN AS EXA	AMPLE				3	
DURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed							
PN: 8D017S75SC							
st modification - by					MOD N°		
Date:			CUSTOMER	DRAWING			
Stainless Steel Receptacle 8D series							
	eral linear erances: ±	NPRDS / PROJECT 859					
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
SOL	JRIAU I	DRG N°	1		SHEET		
	001757				1/2		
C		B		A		J	

	工	۵	п –	m	D		0	
		Contact Layout					Pa	anel Cuto
4		75				SQU	ARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75					Max. thickness panel for receptacle: Typ	<u>Ø⊺</u> ne 0: front m
ى			1				Dim ØA ØAA R1 ØT	
	-						SOURIAU shall not be lia	
							due to a use of the Pr the Specifications issued b (professional reco	oy either ommend
N							PN: 8	Coun FR D017
					B ISS Designed	DATE	Drawing Update Latest modification - by Date:	
					SCALE			ral linear
					NA SOL	JRIAU		erances: ± RIAU.
				- T	FORMA A3		8D	JRIAU 0179
	Н	G	l F	E	D		С	

