


THIS DRAWING, THE DESIGNS AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF STRAIN MEASUREMENT DEVICES, INC. AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF STRAIN MEASUREMENT DEVICES.

REVISIONS			
MOD No.	REV.	DRAWN BY:	DATE
2660	3	SML	2/18/15
2772	4	SML	5/8/15
2635	5	SML	

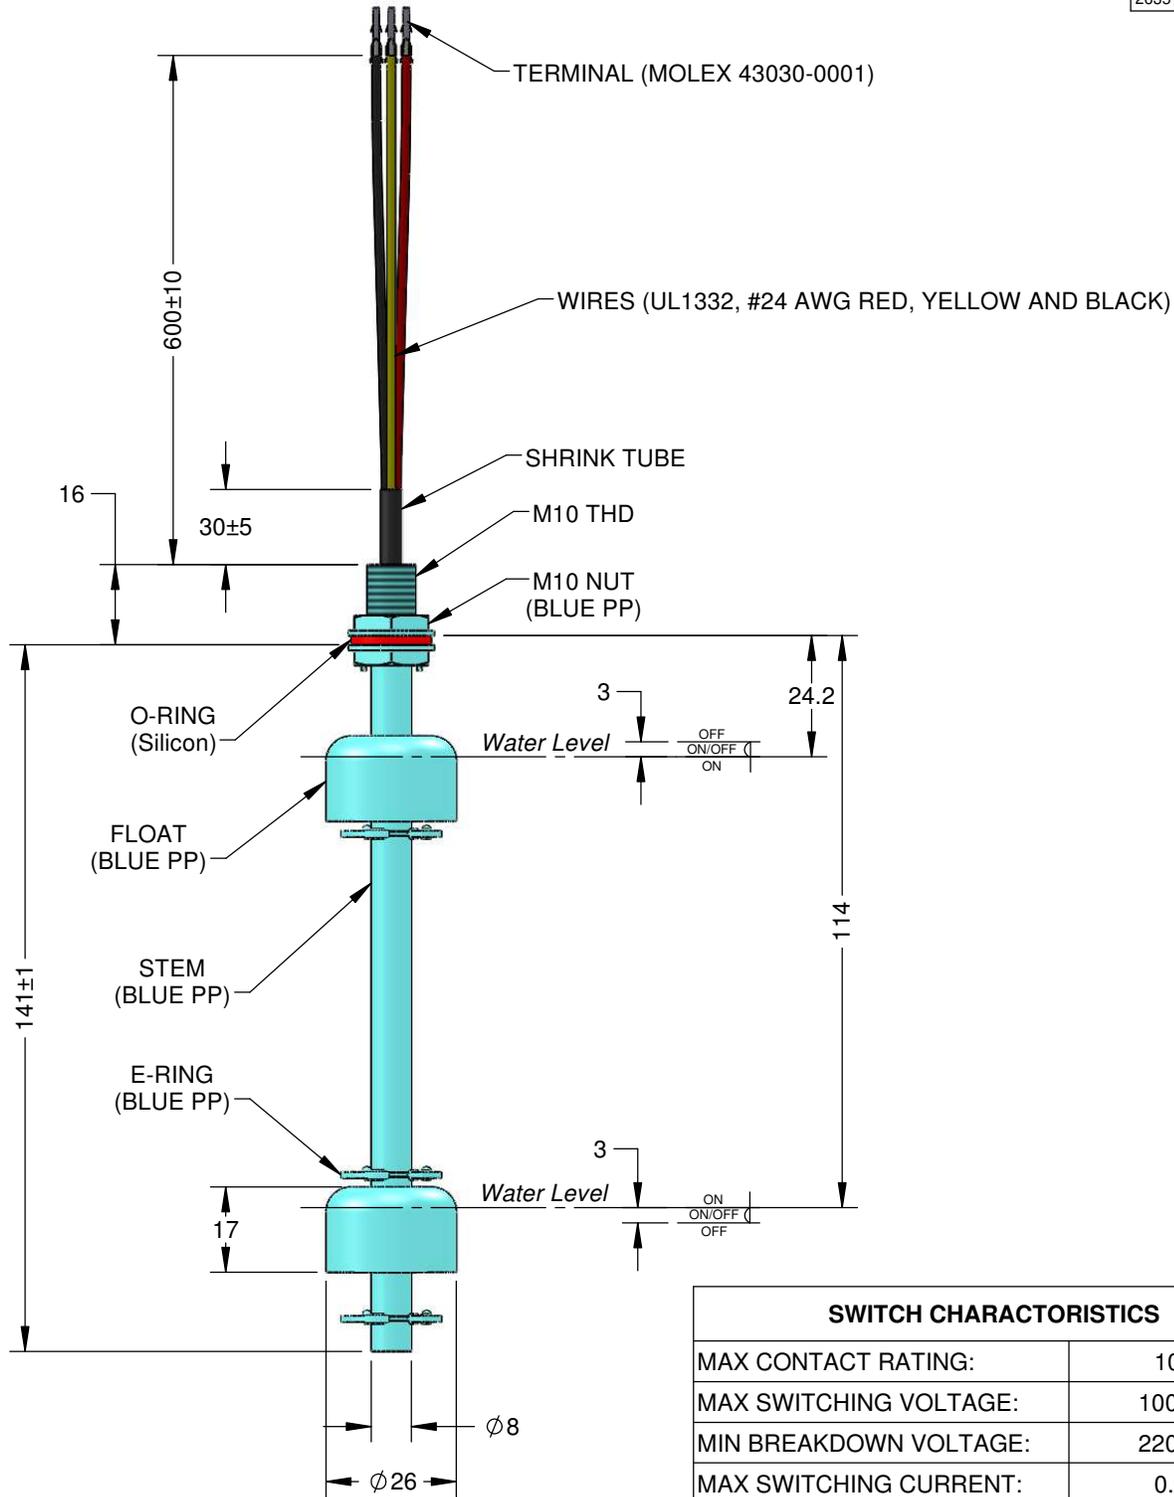

SWITCH CHARACTERISTICS	
MAX CONTACT RATING:	10 W
MAX SWITCHING VOLTAGE:	100 Vdc
MIN BREAKDOWN VOLTAGE:	220 Vdc
MAX SWITCHING CURRENT:	0.5 A
MAX CONTACT RESISTANCE:	400mΩ
OPERATING TEMP RANGE:	0°-80°C
MIN INSULATION RESISTANCE:	10 ¹⁰ Ω

PRODUCT SPECIFICATION

© 2013 Strain Measurement Devices, Inc.	UNLESS OTHERWISE SPECIFIED:	
	BREAK SHARP EDGES .003-.015. REMOVE ALL BURRS.	
	SURFACES TO BE SQUARE &/OR PARALLEL W/IN .005	
	X/X = 1/64"	.XXX = ±.005"
.X = ±.030"	.XXXX = ±.001"	
.XX = ±.010"	ANGLES = ±2°	
BREAK SHARP EDGES .08-.4. REMOVE ALL BURRS.		
SURFACES TO BE SQUARE &/OR PARALLEL W/IN .127		
.Xmm = ±0.5mm	ANGLES = ±2°	
X.XXmm = ±0.3mm	SURFACE FINISH 0.8/	
X.XXXmm = ±0.15mm	SURFACE FINISH 32/	



STRAIN MEASUREMENT
DEVICES

55 Barnes Park North
Wallingford, CT 06492
Telephone: (203)294-5800
www.smdsensors.com

TITLE: FLOAT SENSOR, FM04-1710-GRE1						
DATE:	SCALE:	DIM:	DRAWN:	CHECKED:	NEXT ASSY:	REV
2/3/15	NONE	INCHES	SML	DBA	-	
DWG No.	SMDxxxx		USED ON:	SHT 1 OF 1		5