

# Temperature measuring transducer - MINI MCR-SL-PT100-LP-NC - 2810308

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Configurable loop-powered temperature transducer for Pt 100 temperature sensors, configured via DIP switches, with screw connection, not pre-configured

## Your advantages

- ✓ 2, 3 or 4-wire Pt 100 sensors
- ✓ Highly-compact loop-powered temperature transducer for electrical isolation, conversion, amplification, and filtering of Pt 100 signals to create standard signals
- ✓ Does not require additional auxiliary voltage
- ✓ Error indication via diagnostic LED and analog signal
- ✓ 2-way isolation
- ✓ Input signals can be configured via DIP switches
- ✓ Supplied by an output loop
- ✓ Temperature measuring range of -150°C to +300°C



## Key Commercial Data

|              |   |
|--------------|---|
| Packing unit | 1 pc  |
| GTIN         | <br>4 046356 134668 |
| GTIN         | 4046356134668   |

## Technical data

### Note

|                         |   |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

### Dimensions

|        |         |
|--------|---------|
| Width  | 6.2 mm  |
| Height | 93.1 mm |

# Temperature measuring transducer - MINI MCR-SL-PT100-LP-NC - 2810308

## Technical data

### Dimensions

|       |          |
|-------|----------|
| Depth | 102.5 mm |
|-------|----------|

### Ambient conditions

|   |   |
|---|---|
| Ambient temperature (operation)         | -20 °C ... 65 °C  |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C  |
| Maximum altitude                        | ≤ 2000 m  |
| Permissible humidity (operation)        | 5 % ... 95 % (non-condensing)   |
| Degree of protection                    | IP20  |
| Noise immunity                          | EN 61000-6-2 When being exposed to interference, there may be minimal deviations. |

### Input data

|                                     |                             |
|-------------------------------------|-----------------------------|
| Configurable/programmable           | Yes, unconfigured           |
| Sensor types (RTD) that can be used | Pt 100 (IEC 60751/EN 60751) |
| Sensor input current                | 1 mA (constant)             |
| Connection technology               | 2, 3, 4-wire                |

### Output data

|                                 |  |
|---------------------------------|--|
| Number of outputs               | 1  |
| Configurable/programmable       | Yes, unconfigured                                    |
| Current output signal           | 4 mA ... 20 mA                                       |
|                                 | 20 mA ... 4 mA                                       |
| Max. output current             | 23 mA (output limit)                                 |
| Load/output load current output | $(U_{\text{supply}} - 12 \text{ V}) / 22 \text{ mA}$ |
| Ripple                          | < 20 mV <sub>PP</sub> (at 500 Ω)                     |

### Power supply

|                          |                                   |
|--------------------------|-----------------------------------|
| Designation              | Loop-powered                      |
| Supply voltage range     | 12 V DC ... 30 V DC               |
| Max. current consumption | < 4.5 mA (without signal current) |
| Power consumption        | < 150 mW (without signal current) |

### Connection data

|                                  |   |
|----------------------------------|---|
| Connection method                | Screw connection                            |
| Stripping length                 | 12 mm                                       |
| Screw thread                     | M3  |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 26 ... 12                                   |

### General

|  |  |
|--|--|
| Transmission error in the set measuring range  | $((90 \text{ K} / \text{set measuring range [K]}) + 0.05)\%$ |
| Transmission error in the full measuring range | ≤ 0,25 %   |

# Temperature measuring transducer - MINI MCR-SL-PT100-LP-NC - 2810308

## Technical data

### General

|  |   |
|--|---|
| Maximum temperature coefficient                        | < 0.02 %/K  |
| Linearity error  | < 0.05 % (for full measuring range)   |
| Electrical isolation                                   | Basic insulation according to EN 61010  |
| Overvoltage category                                   | II  |
| Degree of pollution                                    | 2   |
| Rated insulation voltage                               | 30 V AC   |
| Test voltage, input/output/supply                      | 1.5 kV (50 Hz, 1 min.)  |
| Electromagnetic compatibility                          | Conformance with EMC directive  |
| Noise emission   | EN 61000-6-4  |
| Noise immunity   | EN 61000-6-2 When being exposed to interference, there may be minimal deviations. |
| Color  | green   |
| Housing material                                       | PBT   |
| Mounting position                                      | any   |
| Conformance  | CE-compliant  |
| ATEX   | # II 3 G Ex nA IIC T4 Gc X  |
| UL, USA/Canada   | UL 508 Recognized   |
|  | Class I, Div. 2, Groups A, B, C, D T4   |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 2   |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 2   |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 2   |

### EMC data

|  |                          |
|--|--------------------------|
| Designation  | Electromagnetic RF field |
| Standards/regulations                                  | EN 61000-4-3             |
| Typical deviation from the measuring range final value | 5 %                      |
| Designation  | Fast transients (burst)  |
| Standards/regulations                                  | EN 61000-4-4             |
| Typical deviation from the measuring range final value | 5 %                      |
| Designation  | Conducted interferences  |
| Standards/regulations                                  | EN 61000-4-6             |
| Typical deviation from the measuring range final value | 5 %                      |

### Standards and Regulations

|                                  |                                |
|----------------------------------|--------------------------------|
| Electromagnetic compatibility    | Conformance with EMC directive |
| Noise emission                   | EN 61000-6-4                   |
| Connection in acc. with standard | CUL                            |
| Standards/regulations            | EN 61000-4-2                   |
| Designation                      | Electromagnetic RF field       |
| Standards/regulations            | EN 61000-4-3                   |
|                                  | EN 61000-4-4                   |

# Temperature measuring transducer - MINI MCR-SL-PT100-LP-NC - 2810308

## Technical data

### Standards and Regulations


|  |  |
|--|--|
|  | EN 61000-4-5                           |
| Designation  | Conducted interferences                |
| Standards/regulations                                  | EN 61000-4-6                           |
| Electrical isolation                                   | Basic insulation according to EN 61010 |
| Conformance  | CE-compliant                           |
| ATEX   | # II 3 G Ex nA IIC T4 Gc X             |
| UL, USA/Canada   | UL 508 Recognized                      |
|  | Class I, Div. 2, Groups A, B, C, D T4  |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 2                            |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 2                            |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 2                            |

### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


## Drawings

Application drawing

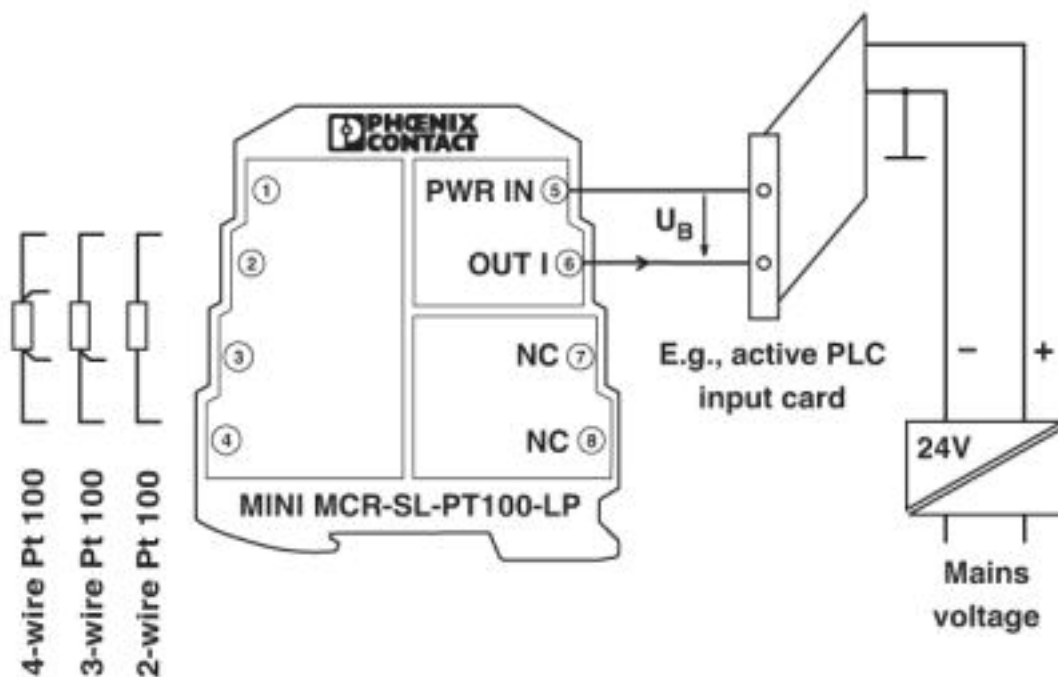


# Temperature measuring transducer - MINI MCR-SL-PT100-LP-NC - 2810308

Block diagram

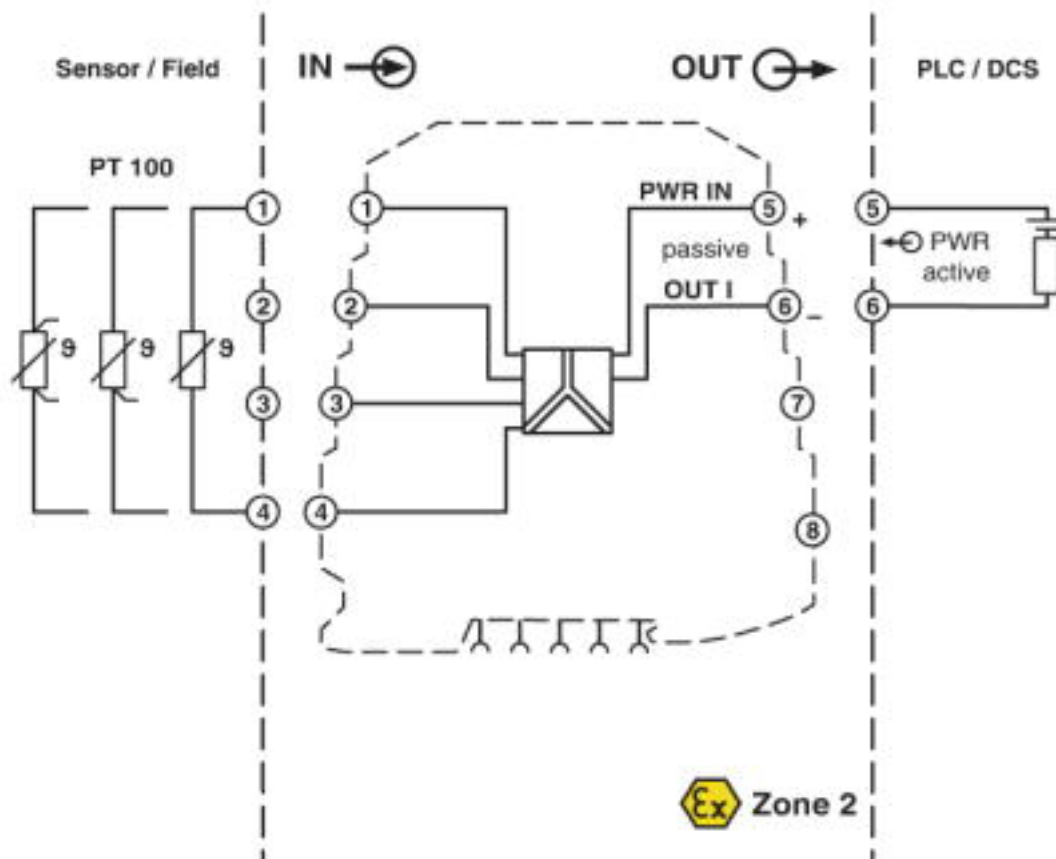

# Temperature measuring transducer - MINI MCR-SL-PT100-LP-NC - 2810308

Dimensional drawing

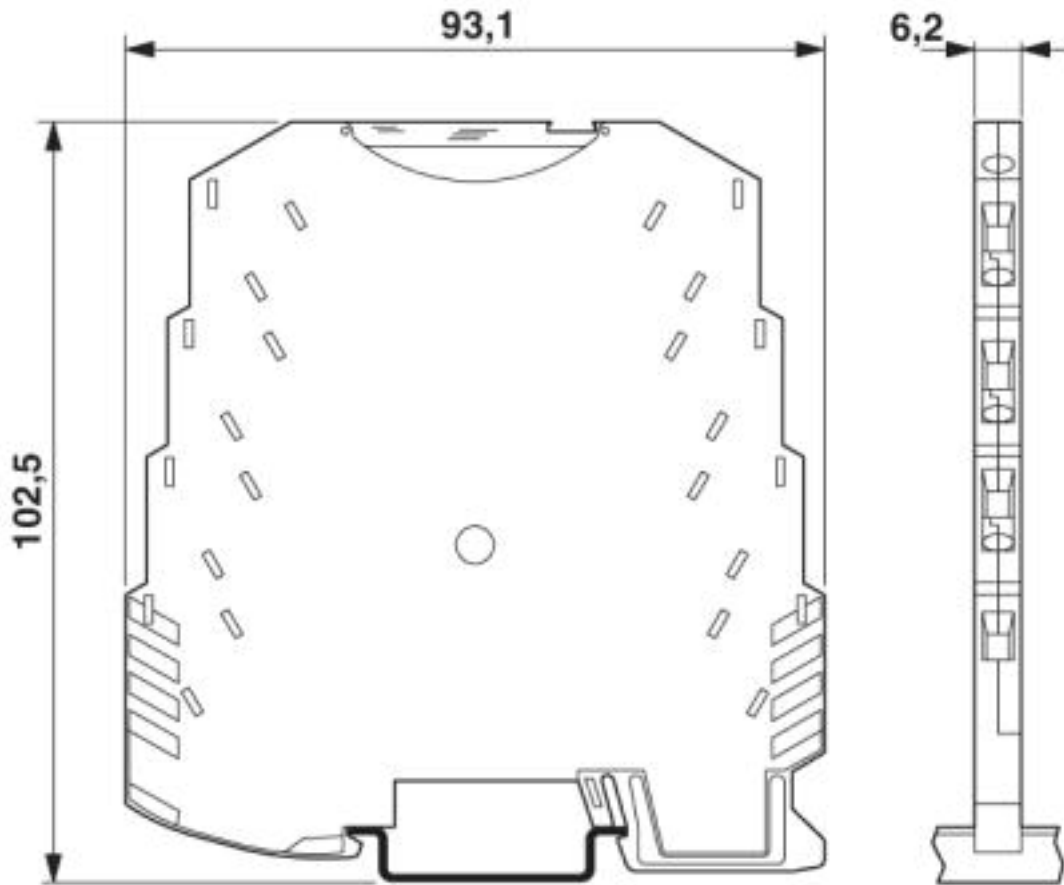

## Approvals

Approvals

---

Approvals

UL Recognized / cUL Recognized / cULus Recognized

---

Ex Approvals

ATEX / UL Listed / cUL Listed / EAC Ex / cULus Listed

---

## Approval details

UL Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm>

FILE E 238705

## Temperature measuring transducer - MINI MCR-SL-PT100-LP-NC - 2810308

### Approvals

cUL Recognized



<http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm> FILE E 238705

cULus Recognized



Phoenix Contact 2019 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>