


# OBSOLETE

- ⚠ CONTACTS: COPPER ALLOY.  
SHELL: COPPER ALLOY  
HOUSING: UL 94V-0 RATED THERMOPLASTIC, COLOR: SEE TABLE.
- ⚠ CONTACTS: 0.076μm MINIMUM GOLD OVER  
0.76μm MINIMUM PALLADIUM NICKEL ON MATING AREA.  
3.80μm MINIMUM TIN-LEAD ON SOLDER TAILS  
ALL OVER 1.27μm MINIMUM NICKEL.  
SHELL: 5.10μm MINIMUM BRIGHT TIN.
- ⚠ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- ⚠ RECOMMENDED PC BOARD THICKNESS 1.57.
- ⚠ CONTACTS: 0.076μm MINIMUM GOLD OVER  
0.76μm MINIMUM PALLADIUM NICKEL ON MATING AREA.  
3.80μm MINIMUM TIN-LEAD ON SOLDER TAILS  
ALL OVER 1.27μm MINIMUM NICKEL.  
SHELL: 1.27μm MINIMUM NICKEL ALL OVER, MATTE TIN DIPPED ON TAILS.
- ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

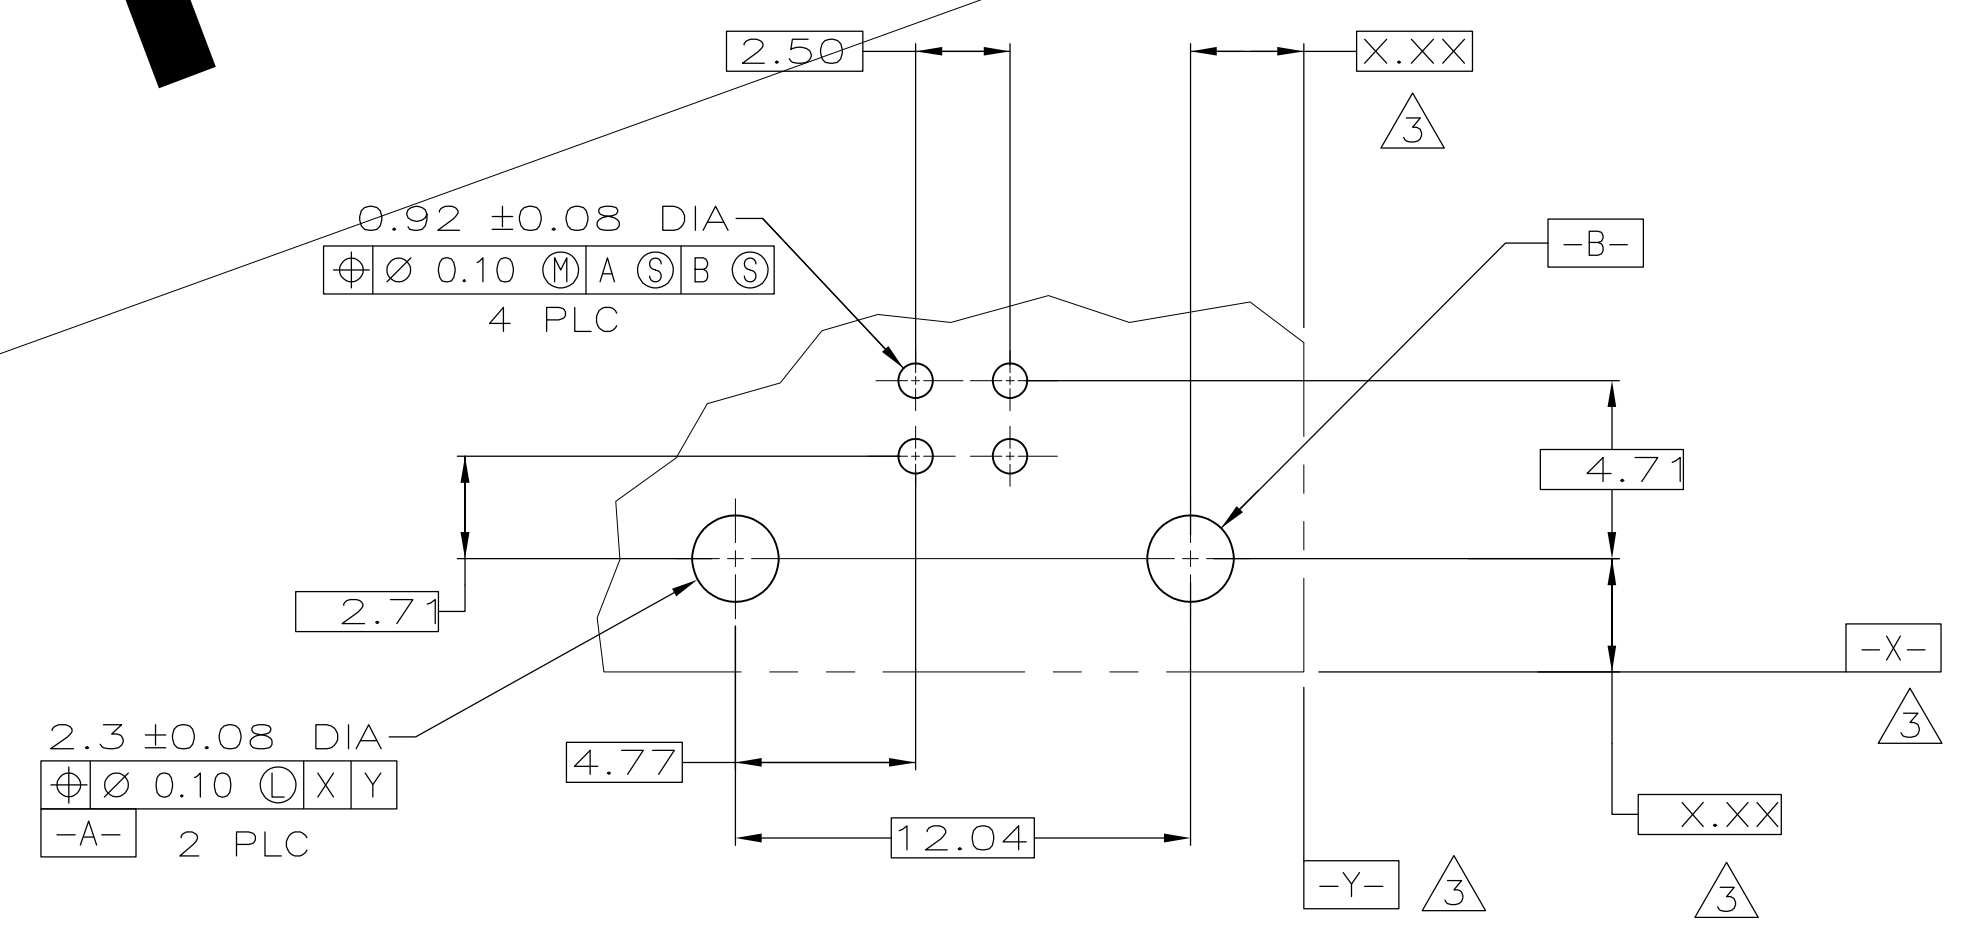

RECOMMENDED PC BOARD MOUNTING DIMENSIONS

⚠ OBSOLETE	YES	⚠	BLACK	787924-4
⚠ OBSOLETE	NO	⚠	BLACK	787924-3
⚠ OBSOLETE	YES	⚠	NATURAL	787924-2
⚠ OBSOLETE	YES	⚠	BLACK	787924-1
HIGH TEMPERATURE COMPATIBLE		FINISH	HOUSING COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 25 OCT 96		D. BROCKWAY	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CIR 14 NOV 96	
0 PLC ± -		1 PLC ± -		J. HAMPTON	
2 PLC ± 0.10		3 PLC ± -		NAME	
4 PLC ± -		ANGLES ± -		PRODUCT SPEC	
MATERIAL		FINISH		APPLICATION SPEC	
SEE TABLE		WEIGHT		SIZE	
		CUSTOMER DRAWING		SCALE 5:1	
		DRAWING NO. A1 00779C=787924		SHEET 1 OF 1	
		REV H3		RESTRICTED TO	