


| 1 | REV | CHANGE | DATE | DRN | СНК |
|---|-----|--------|----------|-----|-----|
| | | Drawn | 02/27/17 | SJ | Т |

| TOLERANCE DETAILS | | | | | | |
|-------------------|----|--------------------------------------|---|----|----------------------------------|--|
| 1 | D | + 0.000 [+ 0.00] - 0.015 [-0.38] | 6 | SD | ±0.005 [±0.13] | |
| 2 | L | $\pm 0.015 [\pm 0.38]$ | 7 | SL | \pm 0.010 [\pm 0.25] | |
| 3 | W | + 0.000 [+ 0.00] - 0.010 [-0.25] | 8 | TL | ±0.010 [±0.25] | |
| 4 | HD | ±0.005 [±0.13] | 9 | WL | +0.000 [+0.00] -0.010 [-0.25] | |
| 5 | HL | + 0.000 [+ 0.00] | | | | |

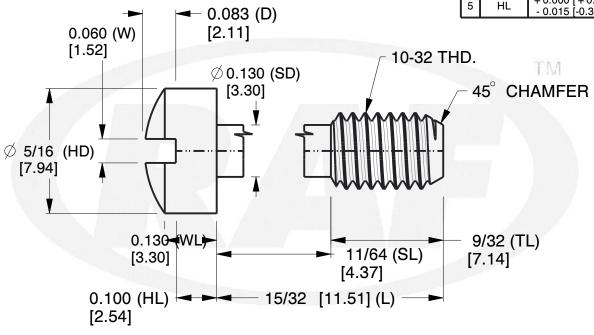

NOTES:

- 1. Material: Stainless Steel
- 2. Finish:
- 3. ASME Y14.5-M 2009
- 4. All Drawing Dimensions are in Inches [mm]
- 5. Unless otherwise specified; Edge Breaks, Radii or Countersinks 0.005-0.015



95 Silvermine Rd., Seymour CT 06483 Tel: 203-888-2133,Fax: 203-888-9860

This Drawing is the Property of RAF. It contains confidential, proprietary information that is RAF property. Do not disclose to or duplicate for others except as authorized by RAF.

TOLERANCES ALL DIMENSIONS ARE INCHES (UNLESS OTHERWISE SPECIFIED) METALLIC

LENGTHS </=: 6 INCHES ± 0.005

LENGTH >: 6 INCHES ± 0.010

DIAMETERS: ± 0.005 **NON-METALLIC**

LENGTH: ±0.010 DIAMETERS: ± 0.010 INTERNAL THREADS: MINIMUM THREAD DEPTH

| COMPONENT | SCREW | |
|---------------------------------|-----------|--------|
| | | SCALE |
| | 4.16 | |
| CAPTIVE PANEL SCREV | V STYLF 4 | SHEET |
| 0/11 111/2 1 / 111/2 0 0 11/2 1 | | 1 of 1 |