THIS DRAWING IS UNPUBLISHED.
VERTRAULICHE UNVEROEFFENTLICHTE ZEICHNUNG
© COPYRIGHT – By –
RELEASED FOR PUBLICATION
FREI FUER VEROEFFENTLICHUNG
ALL RIGHTS RESERVED.
ALLE RECHTE VORBEHALTEN

MATED WITH:
PASSEND ZU:
HA 16

REVISIONS
AENDERUNGEN

P	LTR	DESCRIPTION BESCHREIBUNG	DATE	DWN	APVD
	D6	REVISED PER ECR-17-014011	27MAR18	NG	MKO

SCREW TERMINATION

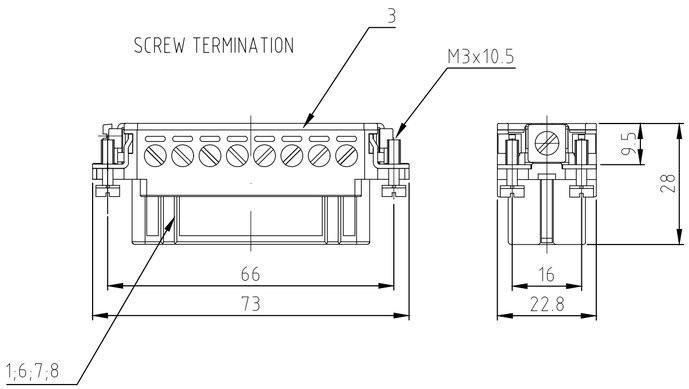

CRIMP TERMINATION

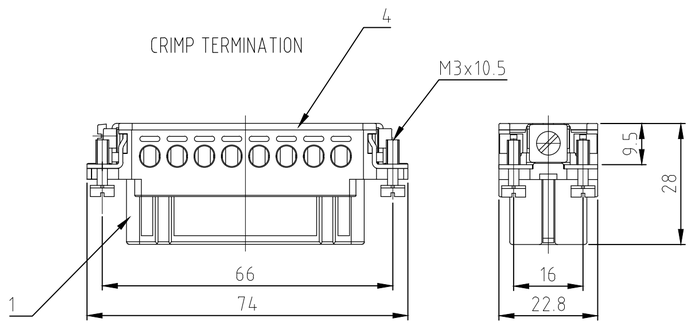

SPRING CLAMP TERMINATION

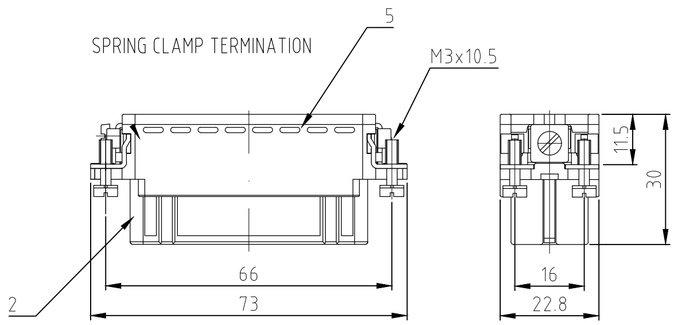

Contact arrangement / view from termination side



Contact arrangement / view from termination side



Contact arrangement / view from termination side



Contact arrangement / view from termination side



NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM

2 SUITABLE HOOD SIZE 5; 7; 9; 11: SERIES HA; HD
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264

3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 300 PIECES

7 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 150 PIECES

8 SPECIAL PACKAGING: AIS
PACKAGING UNIT: 250 PIECES

9 SPECIAL PACKAGING: WIELAND
PACKAGING UNIT: 100 PIECES

Panel cut-out for contact insert when used without housing

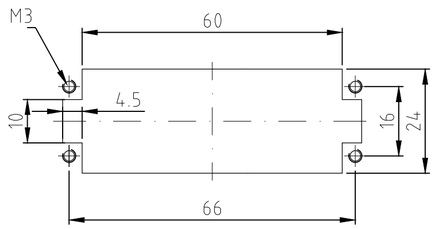

Assembling instruction



10 DISTANCE FOR SAFETY
CONTACT MARKING MAX. 24 mm

ORDERING TEXT / BESTELLTEXT	DESCRIPTION / BENENNUNG	MATERIAL	COLOR / FARBE	ITEM NO. POS.	REMARKS / BEMERKUNGEN
OBSOLETE HA.16.Bu.S.B1-16.WIE	Socket insert screw	PBT	light beige	8	with stainless steel-fixing screw
OBSOLETE HA.16.Bu.S.B1-16.AIS	Socket insert screw	PBT	light beige	7	with stainless steel-fixing screw
OBSOLETE HA.16.Bu.S.B17-32.KM	Socket insert screw	PBT	light beige	6	with AU contact
HA.16.Bu.S.B1-16.KM	Cover	PBT	light beige	5	
OBSOLETE HA.16.Bu.S.VA.B.1-16	Cover	PBT	light beige	4	
OBSOLETE HA.16.Bu.S.-VA.B.17-32	Cover	PBT	light beige	3	
OBSOLETE HA.16.Bu.S.-AU.B.1-16	Socket insert spring clamp	PBT	light beige	2	
OBSOLETE HA.16.Bu.C.B.49-64	Socket insert crimp screw	PBT	light beige	1	
OBSOLETE HA.16.Bu.S.B.49-64	1-3 1-2 1-0 0-7 0-4 0-6 0-5 2-9 1-9 7-9 7-8 1-8 2-8 1-7 7-7 2-7 7-1 2-3 1-1				
OBSOLETE HA.16.Bu.SC.B.49-64					
OBSOLETE HA.16.Bu.SC.B.33-48					
OBSOLETE HA.16.Bu.S.B.33-48					
OBSOLETE HA.16.Bu.C.B.33-48					
HA.16.Bu.S.B.17-32					
OBSOLETE HA.16.Bu.SC.B.17-32					
OBSOLETE HA.16.Bu.C.B.17-32					
OBSOLETE HA.16.Bu.SC.B.1-16					
HA.16.Bu.C.B.1-16					
HA.16.Bu.S.B.1-16					

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT.

DIMENSIONS: MASSE\NHEITEN: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINTOLERANZEN
0 PLC ±
1 PLC ± –
2 PLC ± – –
3 PLC ± – –
4 PLC ± – –
ANGLES / WINKEL ± –

MATERIAL –
FINISH/OBERFLAECHE/FARBE –

DWN 09.02.2000 Schneider
CHK 09.02.2000 Schweiger
APVD –

TE Connectivity

NAME
Female insert
HA.16.BU.C/S
–

PRODUCT SPEC PRODUKTSPEZ. 108-74007
APPLICATION SPEC. VERABEITUNGSSPEZ. 114-74009
WEIGHT GEWICHT

SIZE A2 | CAGE CODE 00779 | DRAWING NO. ZEICHNUNGS-NR. C-1103417 | RESTRICTED TO NUR FUER –

CUSTOMER DRAWING / KUNDENZEICHNUNG | SCALE MASSSTAB 1:1 | SHEET BLATT 1 OF VON 1 | REV D6

1103417