



S21 TRANS LOG MAG.  
▶0.000 dB 0.200 dB/DIU

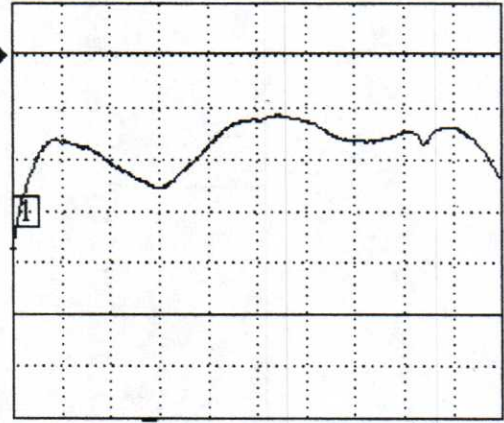


0.800000000 GHz 2.000000000

S11 REFL LOG MAG.  
▶0.000 dB 5.000 dB/DIU

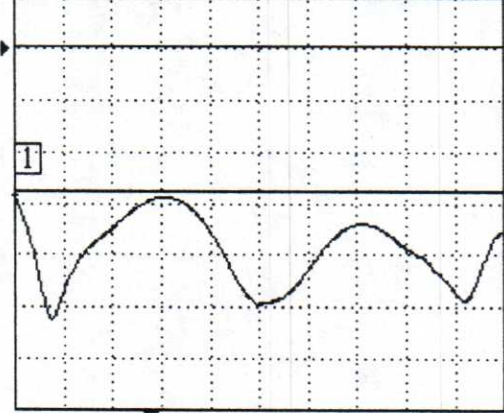


0.800000000 GHz 2.000000000

S22 REFL LOG MAG.  
▶0.000 dB 5.000 dB/DIU

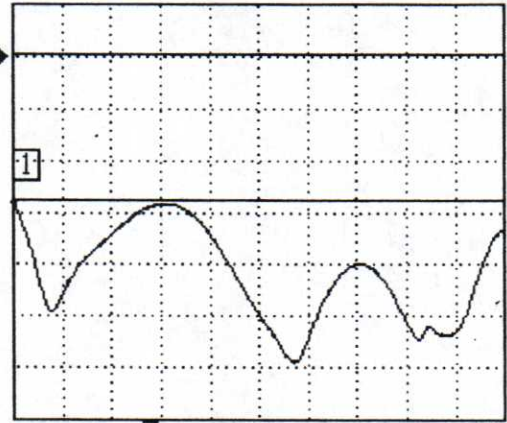

0.800000000 GHz 2.000000000

S12 TRANS LOG MAG.  
▶0.000 dB 5.000 dB/DIU

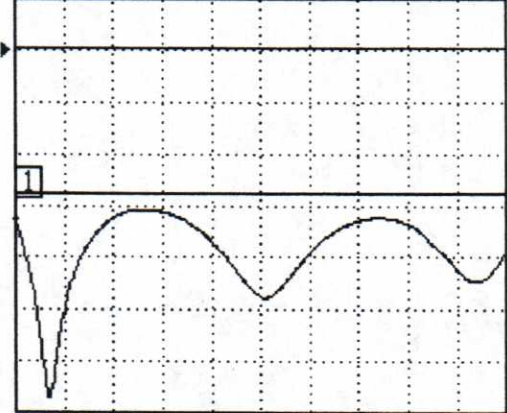

0.800000000 GHz 2.000000000

CH 1 - S21  
0.0000 mm REF  
0.000 dB OFFSET  
0.00° OFFSET

MARKER 1  
0.800000000 GHz  
-0.751 dB

MARKER TO MAX  
▶MARKER TO MIN

MARKER READOUT  
FUNCTIONS

D3I0802 - Isolator

Isolation: 14 dB Min

Insertion Loss 1.0 dB Max

VSWR: 1.50:1 Max