



Quartz Crystal Specification

IQD Part No. + Packaging: LFX TAL082140Reel

Würth Part No. 830108214001



Description

- 1.6 x 1.0mm SMD crystal in a hermetically sealed ceramic package.
Suitable for real time clock applications.
- Model IQXC-90
- Model Issue number 1

Frequency Parameters

- Frequency 32.7680kHz
- Frequency Tolerance $\pm 20.00\text{ppm}$
- Tolerance Condition @ 25°C $\pm 5^\circ\text{C}$
- Overtone Order Fundamental
- Ageing $\pm 3\text{ppm}$ max in 1st year @ 25°C $\pm 3^\circ\text{C}$
- Frequency Stability Coefficient: $-0.035 \pm 10\%/^\circ\text{C}^2$ typ

Electrical Parameters

- Load Capacitance (CL) 4.00pF
- Shunt Capacitance (C0) 1.1pF typ
- Drive Level 500nW max
- ESR 90.00k Ω max

Environmental Parameters

- Storage Temperature Range: -55 to 125°C
- Drop: 100g dummy, 150cm drop (3 directions x 10 times) onto concrete
- Vibration: 1.5mm amplitude, 10Hz-500Hz, 15mins in 3 mutually perpendicular planes, duration 2hrs each plane

Manufacturing Details

- Maximum Process Temperature: 260°C for 10secs max

Compliance

- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Packaging Details

- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 5,000
- Alternative packing option available

USEFUL LINKS


Toolbox:

www.we-online.com/toolbox


Product Catalog:

www.we-online.com/products

Outline (mm)




Note: please make sure that there are no tracks under IQXC-90 on the PCB




Underside View

Solder Pad Layout



Typical Frequency Stability Characteristics

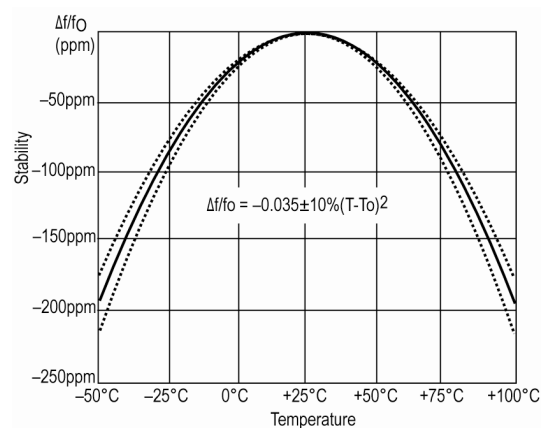

CONTACT INFORMATION:

Würth Elektronik eiSos GmbH & Co. KG
Max-Eyth-Str. 1, 74638 Waldenburg, Germany
Tel: +49(0) 7942 945-0

Email: eiSos@we-online.de
Web: www.we-online.com