PRODUCT DATASHEET FCP15347_FLORENTINA-4X1-O

FLORENTINA-4X1-0

~45° + 15° oval beam

TECHNICAL SPECIFICATIONS:

Dimensions 169.7 x 49.7 mm

Height 28.5 mm

Fastening pin

ROHS compliant yes ①



MATERIAL SPECIFICATIONS:

ComponentTypeMaterialColourFinishROSE-CMC-OSingle lensPCclearFLORENTINA-4X1-HLDHolderPCblack


ORDERING INFORMATION:

» Box size: 476 x 273 x 292 mm

ComponentQty in boxMOQMPQBox weight (kg)FCP15347_FLORENTINA-4X1-OSingle lens727283.4



PRODUCT DATASHEET FCP15347_FLORENTINA-4X1-O

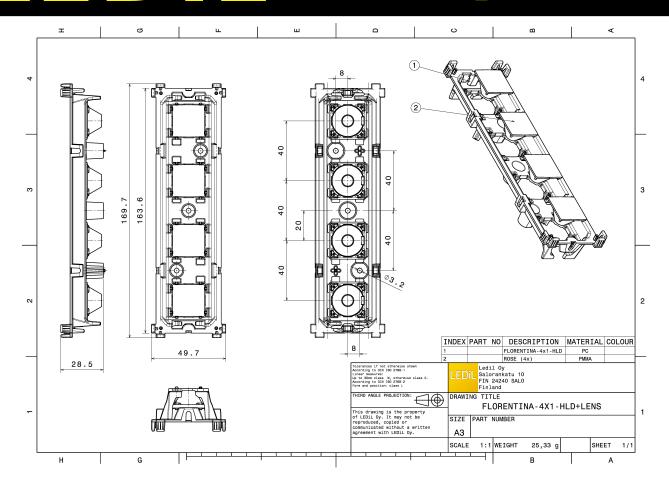

See also our general installation guide: www.ledil.com/installation_guide

PRODUCT DATASHEET FCP15347_FLORENTINA-4X1-O

PHOTOMETRIC DATA (MEASURED):


CONET


LED EASY-T FLUX 1x4 FLR XG xxx G7

FWHM / FWTM 43.0 + 16.0° / 70.0 + 33.0°

Efficiency 75 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C15028_FLORENTINA-4X1-SHD





CONET


LED EASY-T FLUX 1x4 FLR XT xxx G5

FWHM / FWTM 44.0 + 16.0° / 71.0 + 32.0°

Efficiency 72 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C15028_FLORENTINA-4X1-SHD





CREE \$

LED XP-G2

FWHM / FWTM 41.0 + 17.0° / 102.0°

Efficiency 71 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C15198_FLORENTINA-4X1-SHD-OPEN


CREE ÷

LED XP-G2

 ${\rm FWHM\,/\,FWTM} \qquad \ \, 41.0 + 17.0^{\circ}\,/\,70.0 + 32.0^{\circ}$

Efficiency 71 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

C15028_FLORENTINA-4X1-SHD

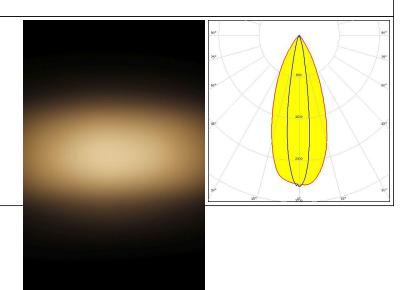

Last update: 25/05/2018

Subject to change without prior notice




PHOTOMETRIC DATA (MEASURED):

CREE \$

FWHM / FWTM $43.0 + 19.0^{\circ} / 71.0 + 40.0^{\circ}$

Efficiency 76 % Peak intensity 2.3 cd/lm LEDs/each optic Light colour White Required components:

C15690_FLORENTINA-4X1-SHD-WHT

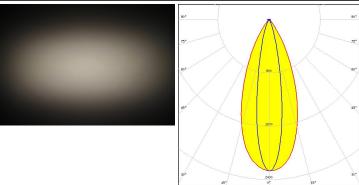


CREE ÷

LED XP-L2

FWHM / FWTM 42.0 + 19.0° / 70.0 + 40.0°

Efficiency 72 % Peak intensity 2.3 cd/lm LEDs/each optic 1 White Light colour Required components:

C15198_FLORENTINA-4X1-SHD-OPEN

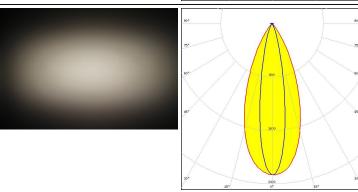


CREE ÷

XP-L2

FWHM / FWTM $43.0 + 19.0^{\circ} / 70.0 + 40.0^{\circ}$

Efficiency 72 % Peak intensity 2.3 cd/lm LEDs/each optic Light colour White Required components:

C15028_FLORENTINA-4X1-SHD

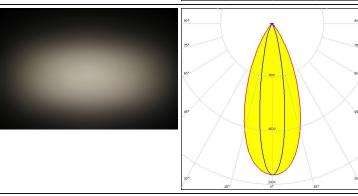


WNICHIA

LED NVSxx19B/NVSxx19C

FWHM / FWTM 44.0 + 16.0° / 70.0 + 31.0°


79 % Efficiency Peak intensity 2.9 cd/lm LEDs/each optic White Light colour Required components:

C15028_FLORENTINA-4X1-SHD

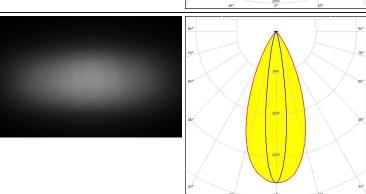



PHOTOMETRIC DATA (MEASURED):

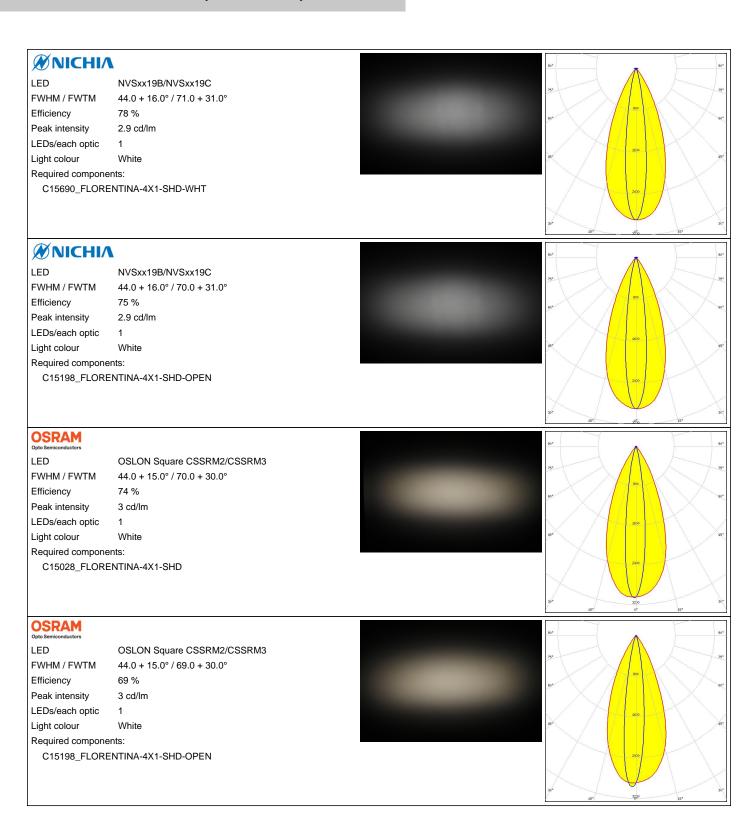



PHOTOMETRIC DATA (SIMULATED):

CREE \$


LED XP-L HD

FWHM / FWTM $10.0 + 25.0^{\circ}$ / $20.0 + 45.0^{\circ}$

Efficiency 198 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

C15028_FLORENTINA-4X1-SHD



PRODUCT DATASHEET FCP15347_FLORENTINA-4X1-O

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy