


Revisions		Approved	Date
Description/Approval/Date	Checked	M.H.	08/15/02
	Drawn	M.D.L.	08/15/02


Tolerances			
1-20	=+/-0.2	20-30	=+/-0.3
30-40	=+/-0.4	40-50	=+/-0.5
50-100	=+/-0.75	100-300	=+/-1.5
Angles=+/-1			

Dimensions are in Millimeters

NOTES (plating thickness in microinches):			
1. Per QQ-B-626	6. Per ZZ-R-765	9. Nickel pl. 100 min. over copper strike	
2. Per QQ-S-764	7. Per WW-1-799	10. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
3. Per QQ-C-530	8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike	11. Gold pl. 30 min. over nickel pl. 50 min. over copper strike	
4. Per QQ-B-750			

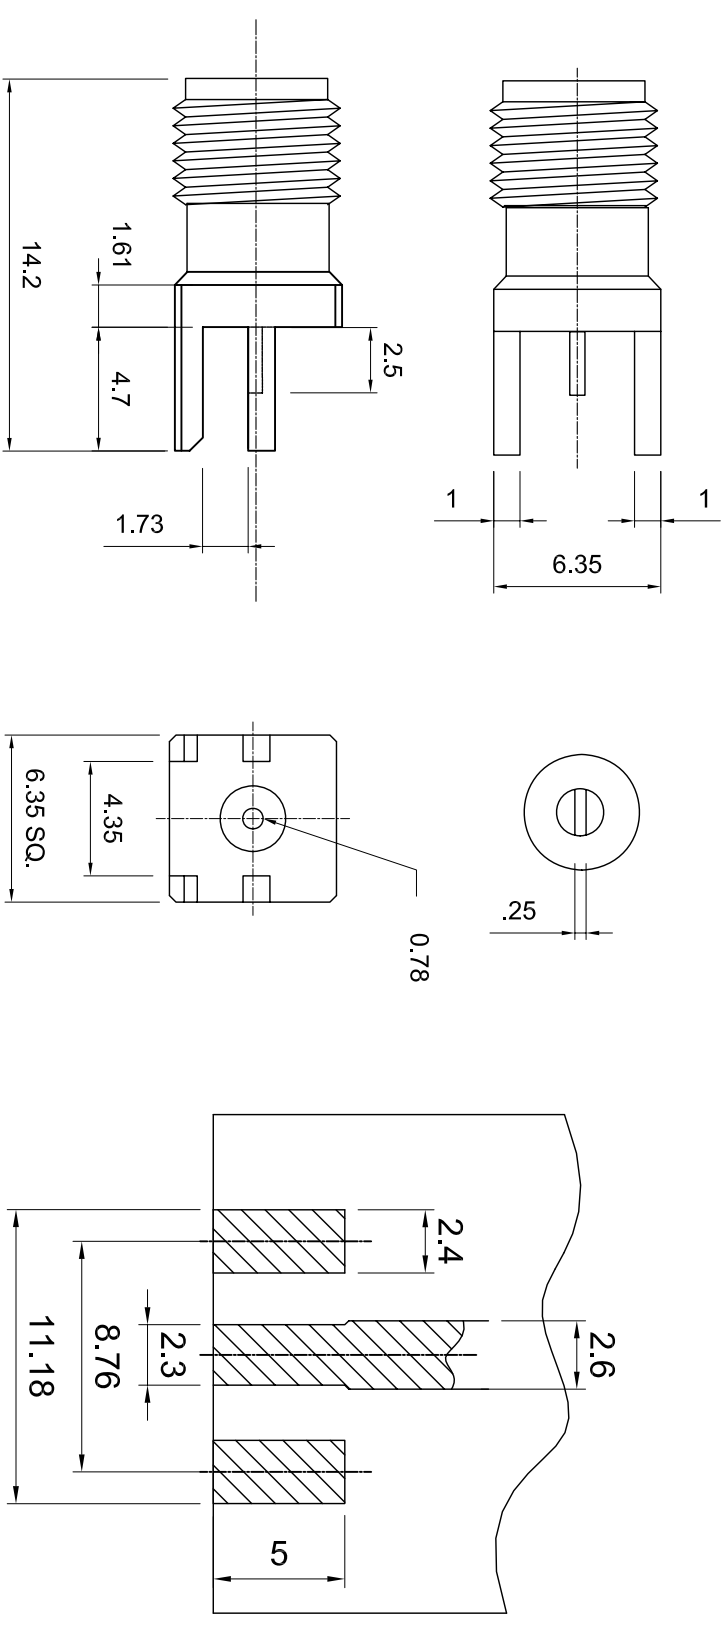

ITEM	MATERIAL	FINISH
Connector Body	Brass, Note 1	Gold, Note 8
Center Contact: F	BeCu, Note 3	Gold, Note 11
Insulation	Teflon, Note 5	None
Ferrule		
Gasket		
Hex Nut		
Lock Washer		

Description SMA end launch PCB jack with tab termination for "0.062" pcb.		
 Lighthouse Technologies, Inc. 9511 Ridgely Court, Suite B San Diego, CA 92123 Part Number: LTI-SASF75ZGT		
Scale	Drawing No.	File Name
1:1	SASF75Z	SASF75ZGT