

STE-708/716 Series

8/16-Port 1U Rackmount Industrial RS232 or RS422/485 Serial Device Servers, with Dual LAN Redundancy



Features


- ▶ 1U 19" Rack-Mount Metal Housing Design
- ▶ Industrial High EMC Protection
- ▶ 8 or 16Ports RS232 or RS422/485 Serial Ports
- ▶ Built-in Dual 10/100Mbps Ethernet for Applications:
 - Daisy Chain Ethernet
 - Network Redundancy
 - Data Redundancy Network
- ▶ 2.5KV Isolation Protection for RS422/485 Models
- ▶ Serial Data Throughput Rate: 50~921.6Kbps
- ▶ Supports Virtual COM, TCP/UDP Server/Client, and Tunneling Mode
- ▶ Configuration via Built-in Web Console, and Windows Utilities
- ▶ Power Input: AC Models: 100~240VAC; DC Models: 24/48VDC
- ▶ Wide Operating Temperature Range Support: -20° to 70° C (-4°F ~ 158°F)
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' new **STE-708 and STE-716 series** is either an 8 or 16-port industrial 1U 19" rackmount designed as an RS232 or RS422/485 serial device server. Each unit is built with dual LAN ports which allow users to set up a ring topology network for dual data redundancy applications. It also supports high EMC protection and 2.5KV optical isolation for RS422/485 models. It is designed with wide operating temperature support (-20° to 70°C) to fulfill any industrial environmental application.

Many industrial applications still require legacy serial equipment such as PLCs, barcode scanners, display signs, security access controllers, CNC controllers and many more that are not yet Ethernet ready for a TCP/IP network. Antaira's STE-708 and STE-716 series are designed to transmit data bi-directionally between one-or-more serial devices to a TCP/IP network. Plus the advanced network and data redundancy features would allow users to execute an excellent remote management application.

DIMENSIONS

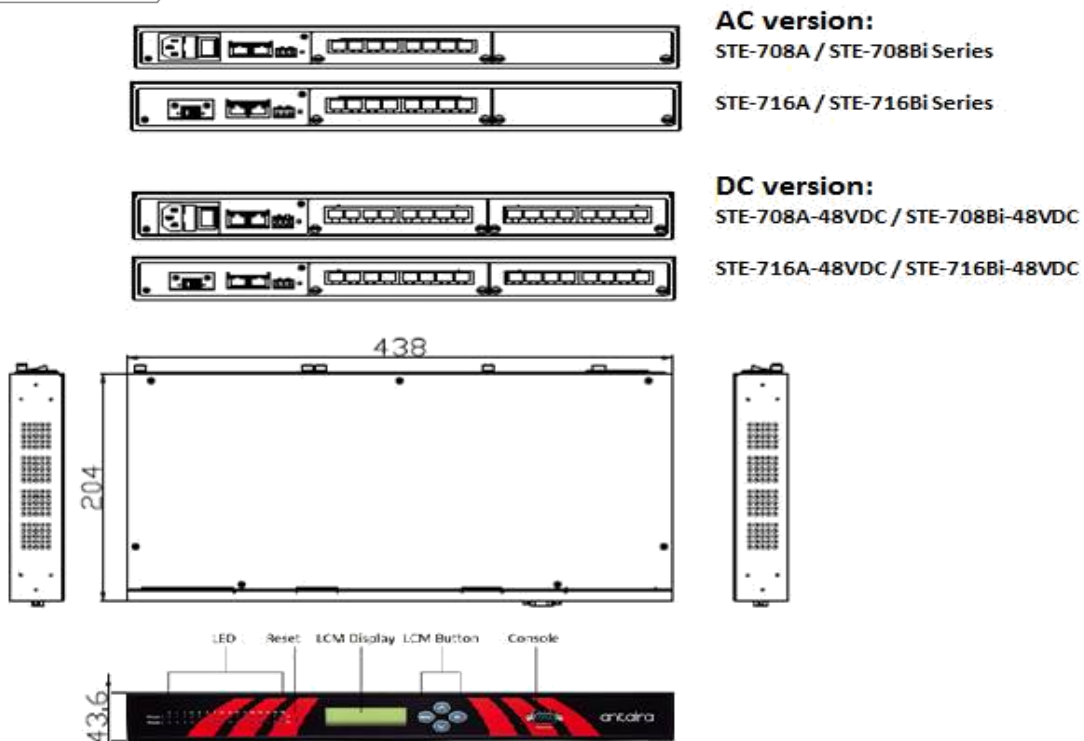

SPECIFICATIONS

Ethernet Interface	
Technology	IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet
Ports	2*RJ45 (Dual Individual IP Subnets or LAN Redundancy)
Speed	10BaseT / 100BaseTx
Serial Interface	
Connectors	8 or 16 RJ45 Ports
Mode	STE-708A/716A series with 8/16 Ports RS232 STE-708Bi/716Bi series with 8/16 Ports RS422/485 w/Isolation Protection
Baud Rate	50~921,600 bps
Parity	None, Odd, Even, Space, Mark
Data/Stop Bits	5,6,7,8, / 1,2
Flow Control	None, Xon/Xoff, RTS/CTS (RS-232 only)
Serial Console	Dedicated RS-232 console port on front panel (DB9)
Serial Line Protection	15KV ESD Protection 2.5KV Isolation Protection
Software	
Protocol	IPv4, ICMP, TCP, UDP, DHCP Client, SNMP, HTTP, Telnet, RFC2217, NTP, DNS, SMTP, Syslog
Configuration	Web Console, Serial Manager, Serial console, Telnet
Virtual COM Mode	Windows / Linux redirection software
TCP Server Mode	4-connection mode supports Raw Data, Virtual COM or Reverse Telnet
TCP Client Mode	Dual destinations support Raw Data or Virtual COM
UPD Mode	Up to 8 ranges of IPs

Mechanical Characteristics	
Housing	Metal – 1U 19" Rackmount
Dimension	436 x 43.5 x 200 mm (W x H x D)
Weight	3200g (16 ports) / 3000g (8 ports)
Reset Button	Yes
Power Requirement	
Input Voltage	110~240VAC (AC models) 24/48 VDC (DC models)
Power Connection	IEC 60320-1 C14 AC Power Inlet (AC models) 3-Pin Terminal Block (DC models)
Input Current	0.21A (AC models) / 0.54A (DC models)
Power Redundancy	-
Reverse Polarity Protection	Yes
Power Consumption	21W (AC models) 13W (DC models)
Environmental Limits	
Operating Temperature	-20°C ~ 70°C (-4°F ~ 158°F)
Storage Temperature	-40°C ~ 85°C (-40°F ~ 185°F)
Ambient Relative Humidity	5 to 95%, (non-condensing)
Regulatory Approvals	
EMI	EN 55022: 2010, EN 55024: 2010, FCC Part 15B, Class A
EMS	IEC-610004-2 (ESD) Level 4; IEC-610004-3 (RS) Level 3; IEC-610004-4 (EFT) up to Level 4; IEC-610004-5 (Surge) up to Level 4; IEC-610004-6 (CS) Level 3; IEC-610004-8 (PFMF) Level 3; IEC-610004-11
Shock / Vibration / Free Fall	IEC 60068-2-27 / IEC 60068-2-6 / IEC 60068-2-32
Green	RoHS Compliant
Certifications	FCC, CE
Warranty	5 Years

ORDERING INFO

STE-708A	8-Port 1U Rackmount Industrial RS232 Serial Device Server, AC Input, US Plug
STE-708A-EU	8-Port 1U Rackmount Industrial RS232 Serial Device Server, AC Input, EU Plug
STE-708A-DC	8-Port 1U Rackmount Industrial RS232 Serial Device Server, DC Input, US Plug
STE-708Bi	8-Port 1U Rackmount Industrial RS422/485 Serial Device Server with Isolation, AC Input, US Plug
STE-708Bi-EU	8-Port 1U Rackmount Industrial RS422/485 Serial Device Server with Isolation, EU Input, US Plug
STE-708Bi-DC	8-Port 1U Rackmount Industrial RS422/485 Serial Device Server with Isolation, DC Input, US Plug
STE-716A	16-Port 1U Rackmount Industrial RS232 Serial Device Server, AC Input, US Plug
STE-716A-EU	16-Port 1U Rackmount Industrial RS232 Serial Device Server, AC Input, EU Plug
STE-716A-DC	16-Port 1U Rackmount Industrial RS232 Serial Device Server, DC Input, US Plug
STE-716Bi	16-Port 1U Rackmount Industrial RS422/485 Serial Device Server with Isolation, AC Input, US Plug
STE-716Bi-EU	16-Port 1U Rackmount Industrial RS422/485 Serial Device Server with Isolation, EU Input, US Plug
STE-716Bi-DC	16-Port 1U Rackmount Industrial RS422/485 Serial Device Server with Isolation, DC Input, US Plug
Optional Accessories	
PWRCORD-US	AC Power Cord – US Plug
PWRCORD-EU	AC Power Cord – EU Plug