





THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	①



②
INSIDE

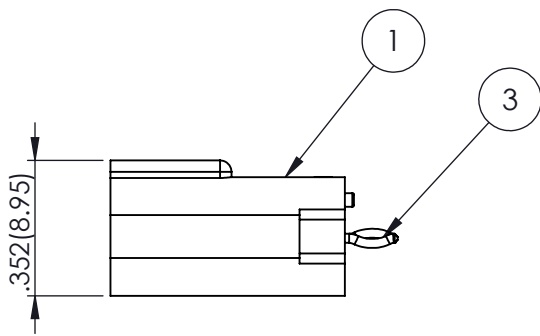

MATERIALS:

- HOUSING: PBT, UL94V-0
- TERMINAL: PHOSPHOR BRONZE
TIN PLATED
- WIRE-HOUSING SEAL: SILICON RUBBER

SPECIFICATIONS:

- PITCH: 2.5MM
- RATED VOLTAGE: 250V
- RATED CURRENT: 3A MAX
- WITHSTAND VOLTAGE: AC 1000V R.M.S.
- CONTACT RESISTANCE: 15 mOHMS MAX
- INSULATION RESISTANCE:
1000 MOHMS MIN/DC 500V
- TEMPERATURE RANGE: -40°C ~ +105°C
- WATERPROOF GRADE: TESTED AND
CERTIFIED TO IP67

ITEM NO.	DESCRIPTION	QTY.
1	565-003-420-101_Housing	1
2	565-003-420-101_Silicon Rubber	1
3	565-003-420-101_Pin	3

Waterproof Connector, Plug, Board Mount,
3Pin
565-003-420-101

ACAD REFERENCE NO.	565-003-420-101
DRAWN: R.STA.MONICA	DATE: OCT.29/10
CHECKED:	DATE:
SCALE: NOT TO SCALE	SHEET 1 OF 1

EDAC
EDAC INC
TORONTO, ONTARIO
CANADA
YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED, OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

DRAWING NUMBER	ISSUE
565-003-420-101	1



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY