

COIL: @ +25° C	
RESISTANCE	2000 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	4.5 mADC
MUST RELEASE	0.50 mADC


ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX (HI-G IS 8 MS)
 RELEASE 10 MS MAX (HI-G IS 4 MS)
 CONTACT BOUNCE 3 MS MAX

CUST. HI-G
 CUST. NO. 2BK-1B-118

TYPE "SF" RELAY

CUSTOMER DATA SHEET

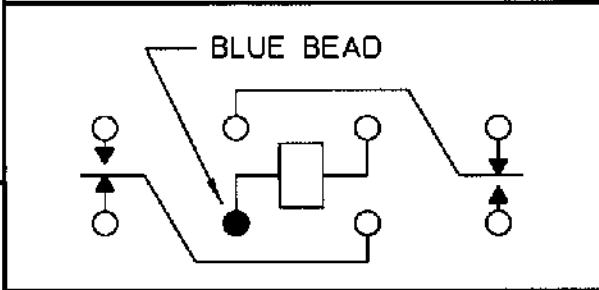

CONTACT RATING: LOW LEVEL TO 2 AMPS
 30 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 2/20/98 CK2/20/98 MB

COMMUNICATIONS INSTRUMENTS, INC.

SF6193H01