


C901U309CYNDCAWL50

Obsolete

C900AC SFTY X1-400 Y2-250, Ceramic, 3 pF, +/-0.25 pF, 400 VAC (X1), 250 VAC (Y2), C0G, Lead Spacing = 10mm

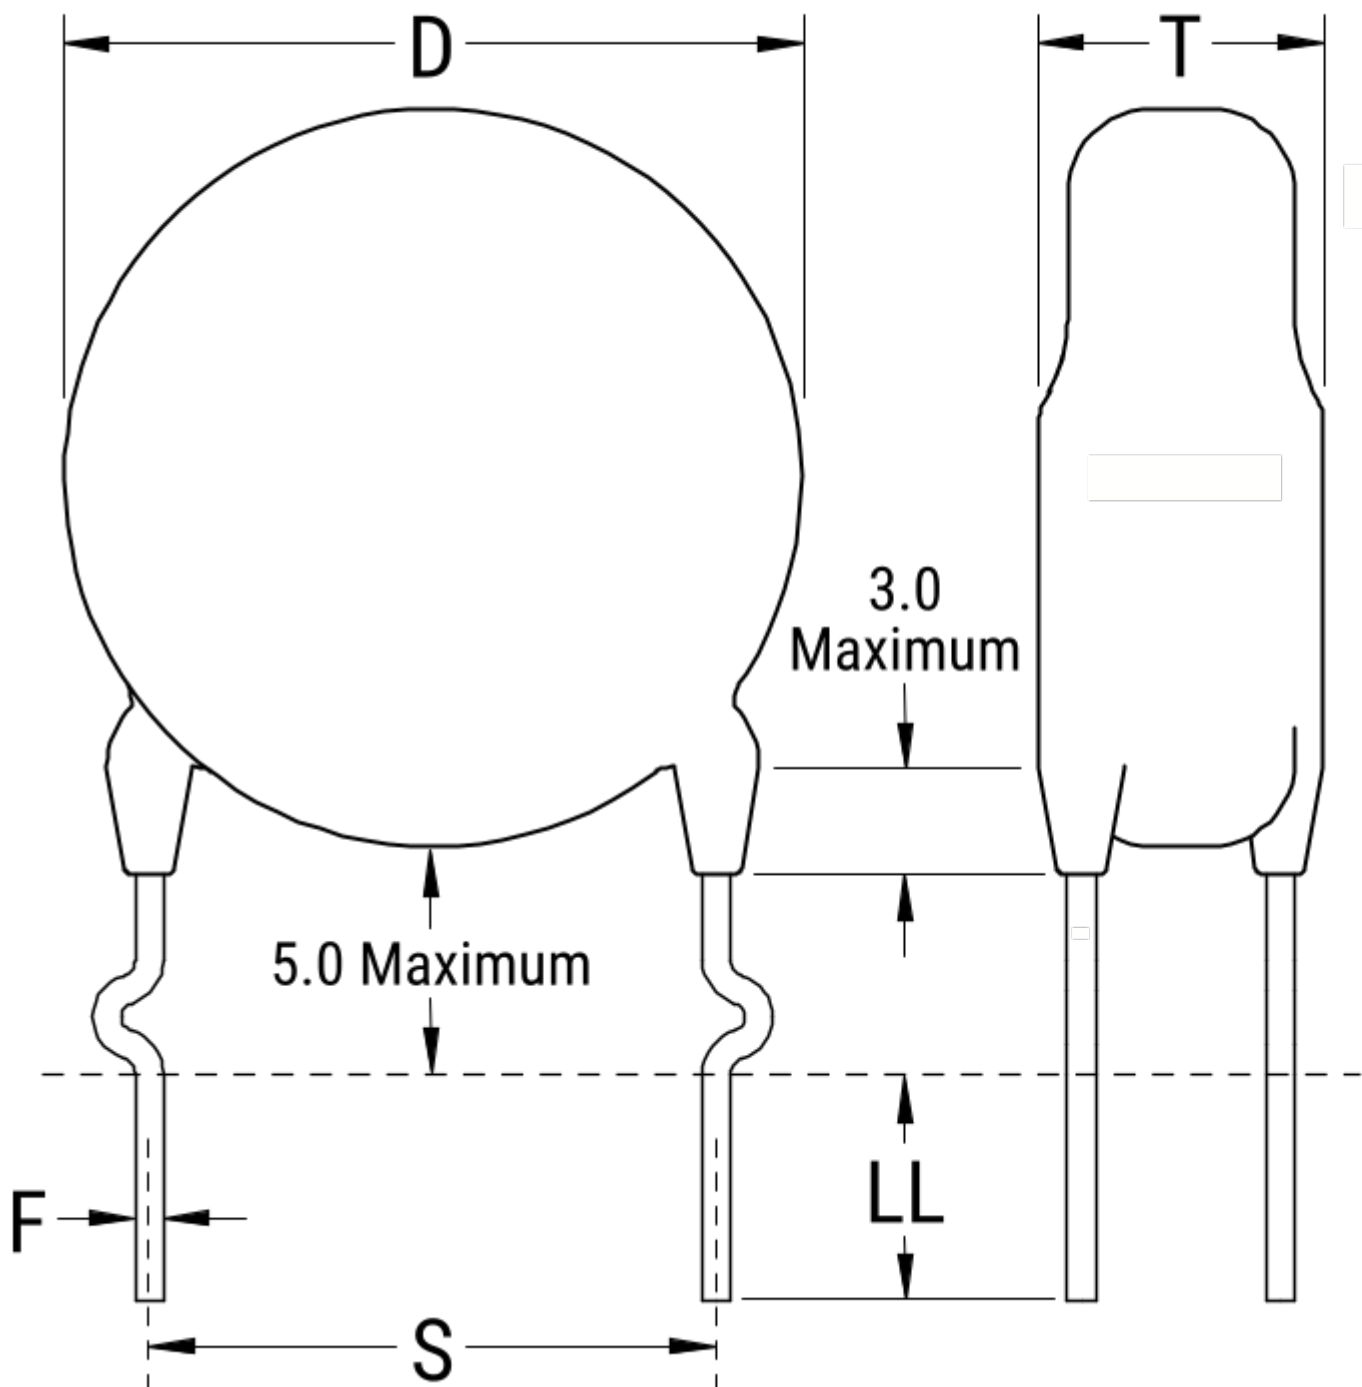

Dimensions

D 7mm MAX

T 5mm MAX

S 10mm +/-1mm

Dimensions

LL 5mm +/-1mm

F 0.5mm +/-0.1mm

Packaging Specifications

Packaging Bulk, Bag

Packaging Quantity 500

General Information

Series C900AC SFTY X1-400 Y2-250

Style Radial Disc

RoHS Yes

Termination Tin

Failure Rate N/A

Qualifications UL, ENEC, VDE, CSA, CAN

AEC-Q200 No

Halogen Free Yes

Specifications

Capacitance 3 pF

Capacitance Tolerance +/-0.25 pF

Voltage AC 400 VAC (X1), 250 VAC (Y2)

Dielectric Withstanding Voltage 2600 VDC

Temperature Range -40/+125°C

Temperature Coefficient C0G

Insulation Resistance 10 GOhms

Quality Factor 460

Safety Class X1/Y2

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 720be8df-45a1-4cfa-a790-cd482c3bc62b

© 2006 - 2023 KEMET

Generated 5/18/2023 - 720be8df-45a1-4cfa-a790-cd482c3bc62b

© 2006 - 2023 KEMET