



View on mating side



← 2 3 4 5 6 7

A = 4 standard contacts L=3,9
 C = 4 standard contacts L=3,9
 S = 8 total number of contacts

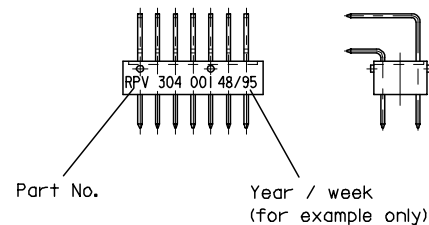

Marking	Customer special
Performance level	Customer special
Flux proof	no
Fixing clip	no
Dimensions	E-85300-9004 SHEET 1

C	special	c1,3,5,7,
A	special	a1,3,5,7
Contact symbol	Perform. level	Contact position number

ENTER DESCRIPTION EC NO: 12005-0384 DRWN: SIVAKUMAR 2005/03/01 CHKD: SSUDHIR 2005/03/02 APPR: KPRASAD 2005/04/14	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY SIVAKUMAR	DATE 2005/01/18	TITLE 21 POS.MALE CONNECTOR (RPV 304 001) CONTACTS ARRANGEMENT		
		4 PLACES ± --- ± ---	3 PLACES ± 0.05 ± ---	2 PLACES ± 0.1 ± ---	CHECKED BY SSUDHIR	DATE 2005/01/18	MOLEX MOLEX INCORPORATED		
		1 PLACE ± 0.15 ± ---	ANGULAR ± 2 °		APPROVED BY SSUDHIR	DATE 2005/01/18	MATERIAL NO. 85300-9004	DOCUMENT NO. SD-85300-9004	SHEET NO. 1 OF 1
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					