




7 6 5 4 3 2 1

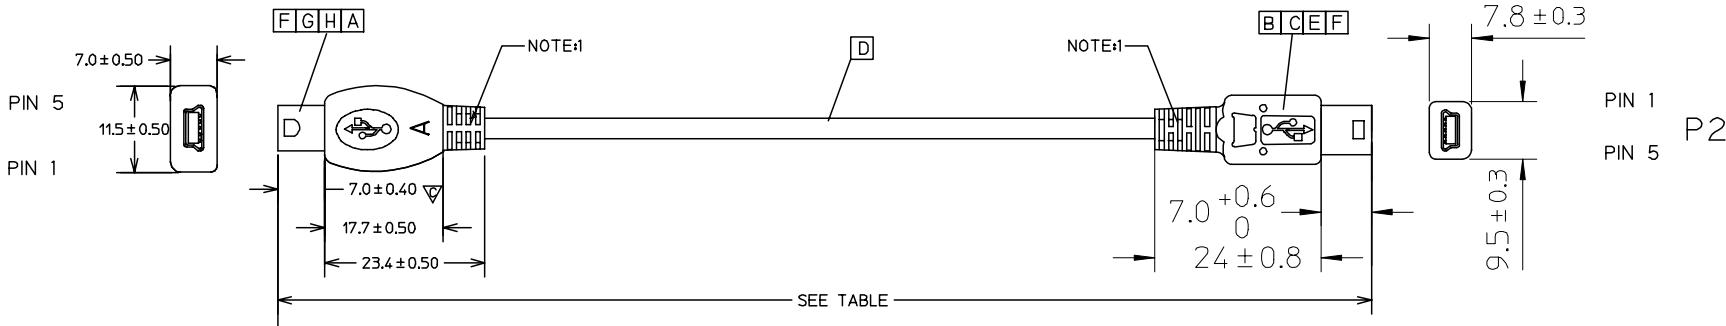

BACK



BACK

NOTE:

- PHYSICAL
- MOLDED WITH PVC RESIN (SEE TABLE)
  - ANY SURFACE ON MINI A SIDE CAN HAVE TEXTURING UP TO 0.3mm ABOVE OR BELOW THE SURFACE;
  - A CIRCULAR AREA AROUND THE LETTER "A" CAN BE RAISED OR LOWERED AS MUCH AS 0.5mm ABOVE THE SURFACE;
  - STICK UL LABEL ON EACH CARTON.
- ELECTRICAL PERFORMANCE:
- ALL TEST DUABILITY:0.01 SEC.
  1. DIELECTRONIC STRENGTH:500V DC
  2. INSULATION RESISTANCE:100M OHMS
  3. CONDUCTIVE RESISTANCE:3 OHMS
  - 6.ALL COMPOUNT MUST MEET RoHS COMPLIANCE.

SHELL	SHELL	SHIELDING	BRAID WIRE	ITEM	DESCRIPTION	L	QTY.
4 & 5	5	GROUND	BLACK	H	MINI A PLUG REAR SHELL 887899020		1
3	3	+DATA	GREEN	G	MINI A PLUG FRONT SHELL 887899019		1
2	2	-DATA	WHITE	F	COPPER FOIL 887801114		2
1	1	VCC	RED	E	USB SERIES MINI-B PLUG COVER SHIELD 675460000		1
P 1	P 2	SIGNAL NAME	WIRE COLOR	D	USB CABLE #28/#24 (SEE TABLE)		
				C	USB SERIES MINI-B PLUG SHIELD CASE 675450000		1
				B	MINI-B PLUG 675420008		1
				A	MINI A PLUG HOUSING 887899018		1

ENTER DESCRIPTION EC NO: DG2008-0027 DRWN: JFZHENG CHKD: APPR: BLAU 2007/10/22 2007/10/24 2007/10/24	QUALITY SYMBOLS ▽=0 ▽=2	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
		4 PLACES ± --- ± ---	mm INCH	DRAWN BY JFZHENG	DATE 2006/01/04	TITLE USB MINIA TO MINIB CABLE ASS'Y					
		3 PLACES ± --- ± ---		CHECKED BY JFZHENG	DATE 2006/01/04	Molex MOLEX INCORPORATED					
		2 PLACES ± --- ± ---		APPROVED BY HXIE	DATE 2006/01/04	MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-887538100	SHEET NO. 1 OF 2			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ±1/2°		SIZE A4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

6 5 4 3 2 1

7 6 5 4 3 2 1

TABLE

88753-8610	2000±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8510	1800±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8410	1500±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8310	1200±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8210	1000±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8110	800±30	USB MINI-A TO MINI-B FROST WHT V1.1	88780-8249	88780-0043
88753-8602	2000±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8502	1800±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8402	1500±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8302	1200±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8202	1000±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8102	800±30	USB MINI-A TO MINI-B BLACK V2.0	88780-8248	88780-0019
88753-8600	2000±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8500	1800±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8400	1500±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8300	1200±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8200	1000±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
88753-8100	800±30	USB MINI-A TO MINI-B FROST WHT V2.0	88780-8243	88780-0043
MX P/N	CABLE LENGTH	DESCRIPTION	CABLE P/N	RESIN P/N

ENTER DESCRIPTION EC NO: DG2008-0027 DRWN: JFZHENG CHKD: APPR: BLAU	2007/10/22 2007/10/24 2007/10/24	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
			DRAWN BY JFZHENG	DATE 2006/01/04	TITLE USB MINIA TO MINIB CABLE ASS'Y				
			CHECKED BY JFZHENG	DATE 2006/01/04	APPROVED BY HXIE				
			APPROVED BY HXIE	DATE 2006/01/04	MATERIAL NO. SEE TABLE				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DOCUMENT NO. SD-887538100		SHEET NO. 2 OF 2		MOLEX INCORPORATED	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

6 5 4 3 2 1