

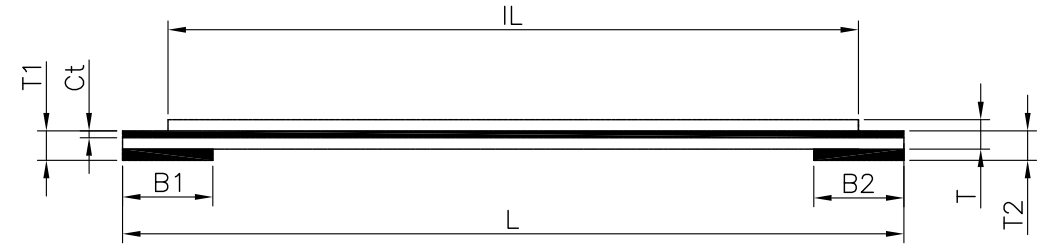


| Item | Specification | |
|---------------------------|---------------|------------------------|
| No. of conductors | 導體芯 N | 40P |
| Pitch | 間距 P | 0.5±0.05 |
| Total Pitch | 總間距 PT | 19.5±0.05 |
| Total Length | 總長度 L | 127±2 |
| Insulation Length | 絕緣長度 IL | 120±2 |
| Margin Width | 邊緣寬度 M | 0.5±0.05 |
| Total Width | 總寬度 W | 20.5±0.05 |
| Strip Length | 線口長度 S1 | 3.5±0.5 |
| Strip Length | 線口長度 S2 | 3.5±0.5 |
| Reinforeing tape length | 補強板長度 B1 | 6±1 |
| Reinforeing tape length | 補強板長度 B2 | 6±1 |
| Slanting | 線口傾斜度 A | ≤0.3 |
| Over lap | 衝孔 | / |
| Terminal thickness | 插入厚度 T1/T2 | 0.32/0.32±0.03 |
| Thickness insulation | 線身厚度 T | 0.155±0.02 |
| Conductor thickness | 導體厚度 Ct | 0.035±0.005 |
| Conductor width | 導體寬度 Cw | 0.3±0.03 |
| Supporting Tape Color | 補強板顏色 | Blue |
| PET(Supporting Tape) | 補強板規格 | 0.225 |
| PET(Insulation) | 絕緣膠規格 | 0.06 (Printing HF105°) |
| PET(Insulation) | 絕緣膠規格 | 0.06 (White HF105°) |
| Storage Temperature Range | 存儲溫度/濕度 | 10°C~35°C/30~65RH% |

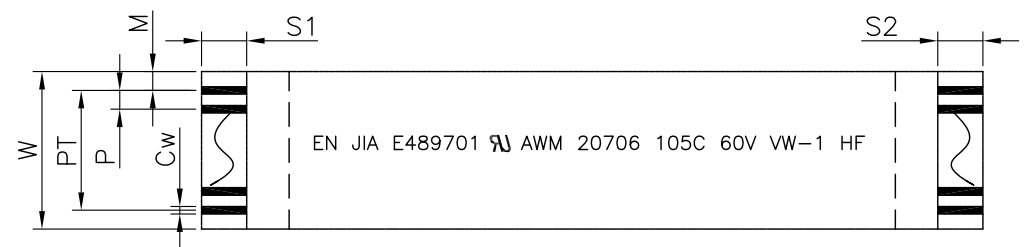

RoHS Compliant

| | | | | |
|-----|-------------|------|----|-----------|
| | | | | DRAWN: |
| | | | | CHECKED: |
| A | 07-May-2022 | | | APPROVAL: |
| REV | DATE | FILE | BY | |

| |
|---|
| GENERAL TOLERANCE: .X=±0.30 .XX=±0.20 .XXX=±0.15 |
| UNIT: MM |
| SCALE: 1:1 |
| SHEET: 1 / 1 |
| PROJECTION: |

| | |
|--|------------|
| CnC Tech Industrial Cable and Connector Technology | |
| DESCRIPTION: 0.5MM 40P L=127MM FLAT FLEXIBLE CABLE | SIZE A4 |
| PART NO: 310-40-0127-A | |

A
B
C
D