


02-.128 (3.25) Dia. Mounting Holes

Contact Detail

.156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

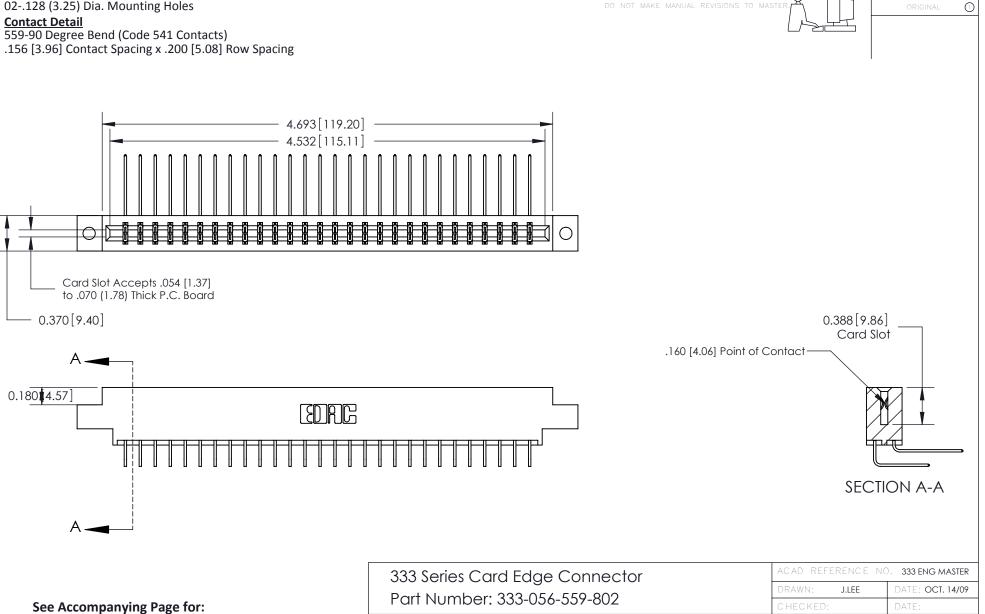

- Bend Detail
- **Mounting Options**
- Features and Specifications

YOUR CONNECTION TO QUALITY & SERVICE

	DRAWN: J.LEE	DATE: OC	CT. 14/0
	CHECKED:	DATE:	
	SCALE: NTS	SHEET	I OF
INC.,AND OR COPIED THF	DRAWING NUMBER		ISSU
APPARATUS	333 Assembly		1

4





his is a c.a.d. generated drawing 💭

ORIGINAL

Features

- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- High Profile Insulator Body .600 (15.24)
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree, & Extender Board Bends
- Single or Dual Row Configurations
- Variety of Mounting Options, Flush or Offset Lugs
- Accepts Between Contact and In-Contact Polarizing Keys

Specifications

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: Green
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 3 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +105 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

333 Series Card Edge Connector Features and Specifications			ACAD REFERENCE NO. 333 ENG MASTER			
			J.LEE	DATE: OCT. 14/09		
			•	DATE:		
EDAC INC	RONTO, ONTARIO CANADA CANADA ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE:	NTS	SHEET 4	4 OF 4	
		DRAWING	NUMBER		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		33	33 Assembly		1	