
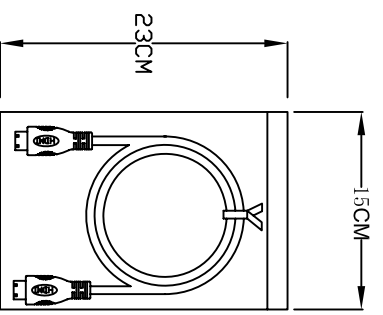


1. Wiring Diagram.

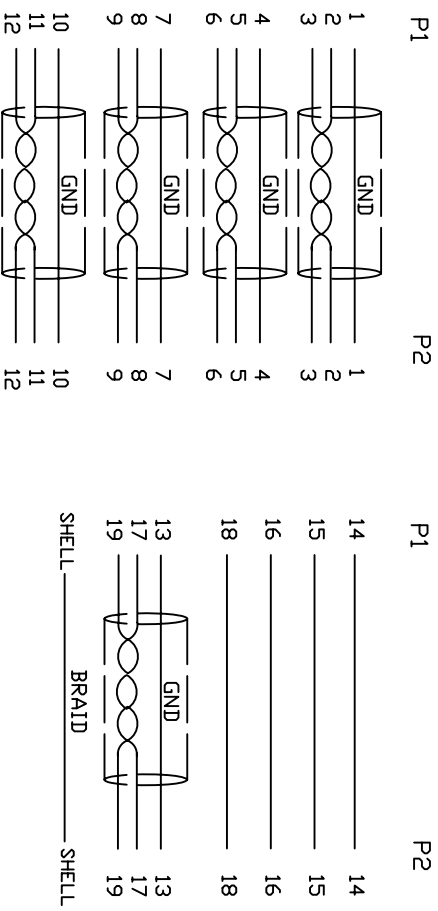

2. Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3. Each pcs with PE polybag.

| | | | | |
|------------------|----------|---|-----|----------|
| 5 | COPER | W20MM*1.35MM | 1 | |
| 4 | PVC | 4SP PVC BLACK OVERMOLD | 25g | |
| 3 | PE | LLDPE 500026 6201 INSIDE MOLDING | 10g | |
| 2 | CONN | HDMI C TYPE MALE PIN G/F ,SHELL PLATED NICKEL, INSULATION BLACK | 2 | P1,P2 |
| 1 | CABLE | UL20276 (30AWG (7/0.1TS) *1P+EA+AL/MY) *5+30AWG (7/0.1TS) *4C +AEM(16/6/0.12AM) OD6.0 BLACK | 1 | 5000mm |
| NO. | PART NO. | DESCRIPTION | QTY | UNIT/REF |
| BILL OF MATERIAL | | | | |

| | | |
|---------------------|-----------------|----------------------------|
| A | INITIAL RELEASE | 2015/10/10 |
| REVISION# | DESCRIPTION | DATE |
| Cnc Tech,LLC | | |
| DRAWN | DATE | TITLE |
| EDWIN/AL | 10/10/15 | HDMI C/M TO HDMI C/M CABLE |
| CHECKED | DATE | DWN NO. |
| Win.C | 10/10/15 | 742-20010-00500 |
| APPROVAL | CUSTOMER P/N: | REV |
| | | A |
| | CUSTOMER: | |
| | | |
| | SHEET 1 OF 1 | |

