



Electrical specifications

Center Frequency: 713 MHz
Bandwidth: 18 MHz
Input / Output Impedance: 50 Ohms
Passband: 704-722 MHz
Passband Insertion Loss: <1.2 dB
Passband Ripple: <0.2 dB
Passband Return Loss: >14 dB
Rejection: >50dB @ 0-664 MHz
 >50dB @ 760-2000 MHz
Power Handling: 1 W


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA (F)
Dimensions: 4.25 x 2.5 x 0.737 in.

Environmental

Operating Temperature: -45 to +85 deg.C
Storage Temperature: -55 to +95 deg.C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

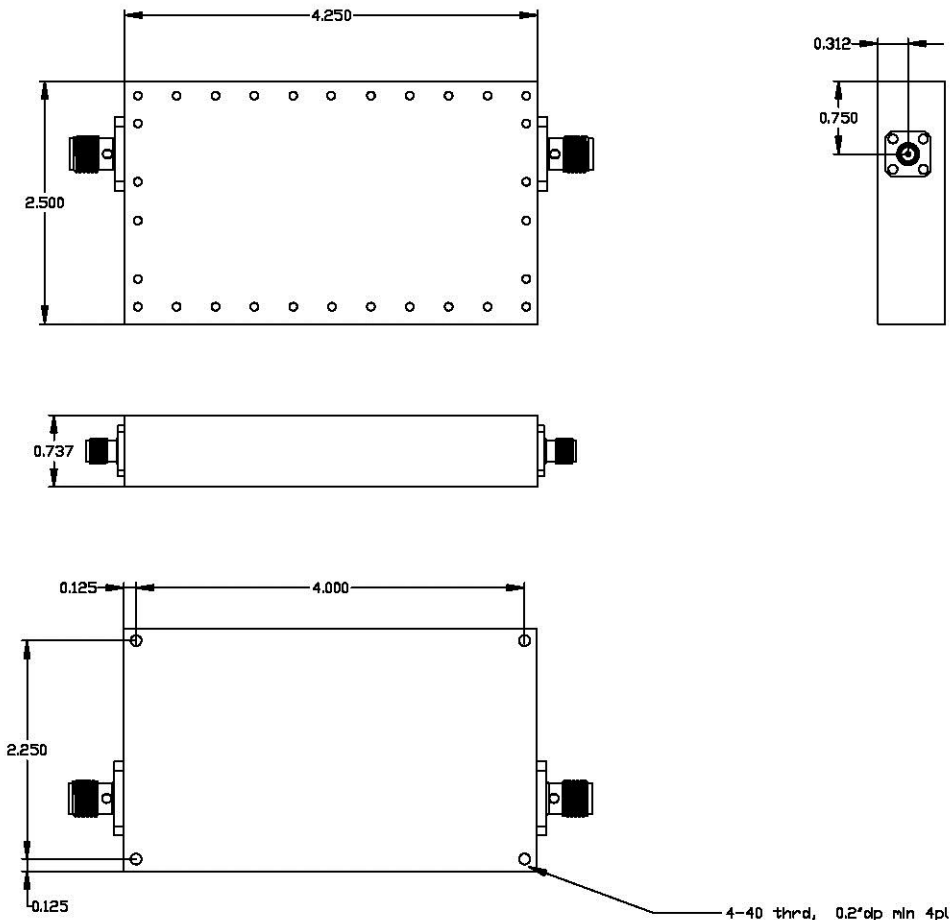



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

713 MHz Cavity Bandpass Filter

Part Number: AE713B9135



Response Plot:

