



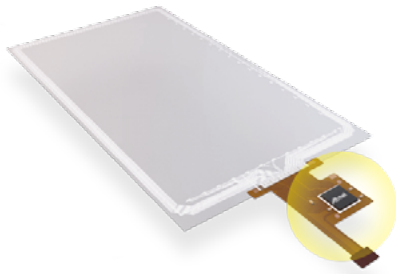
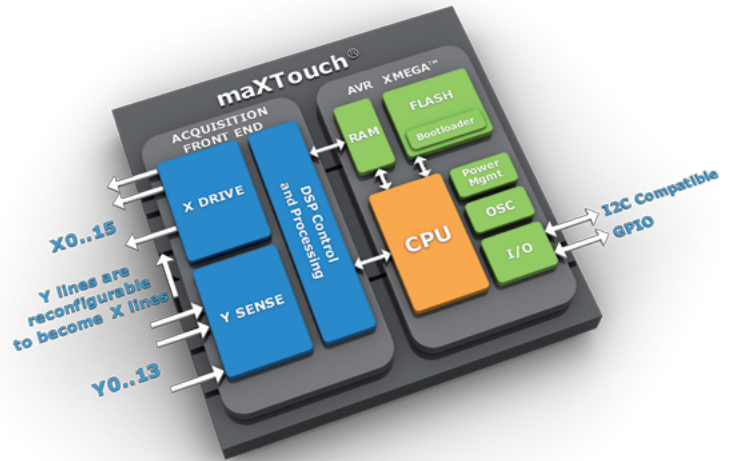
Atmel maXTouch Portfolio

Automotive Qualified Touch Screen Controllers



A commitment to the automotive market

With 30 years of automotive design experience and a commitment to the automotive business, Atmel holds a leading position in car access, in-vehicle networking (IVN), and capacitive touch. Atmel touch devices deliver superior product specs and features to help you tackle your design challenges and differentiate your products. We can support your company's specific sourcing process and flows with our dedicated automotive group and world-class manufacturing. Our products are AEC-Q100 qualified, and our production facilities are TS16949 automotive certified. All of this is backed by dedicated R&D and Quality organizations with more than three decades of experience serving automotive customers. Additionally, we offer easy-to-use tools and development environments to get your project off to a solid start.



Atmel® maXTouch® automotive touchscreen controllers combine patented Atmel charge transfer technology and either an 8/16-bit or 32-bit Atmel AVR® CPU to provide up to 16 simultaneous touches, fast response time, and smart processing of a capacitive touch image. This enables accurately regenerating and reporting the user's interaction with the touchscreen. Multitouch performance identifies and individually tracks touches, allowing a range of built-in gestures to be reported to the host processor.

A high signal-to-noise ratio (SNR) enables the device to work well with fingertip touch as well as a gloved touch. These controllers are also designed to work in demanding, rapidly changing environments. Additionally, because only the touchscreen area is touch-sensitive, you enjoy the freedom to place the chip on the main board or adjacent to the sensor on the flex connector.

Leveraging our role as a leading touchscreen controller supplier into Automotive

Building on more 15 years of touch innovation, Atmel maXTouch technology delivers next-generation controller capabilities for touchscreen applications, including both superior performance and low power consumption. It enables touch interfaces that identify, qualify and track the user's contacts with exceptional precision and sensitivity. Atmel's MaxTouch devices scan all sensor nodes within one touch acquisition cycle, and with its powerful post processing, unintended touches such as a resting palm on the screen will be suppressed. All of this enables seamless touch interfaces that are intuitive, flexible, and reliable.

Atmel touchscreen devices for automotive are fully AEC-Q100 qualified and support temperature ranges from -40° C up to +105° C.




Atmel maXTouch Portfolio

Automotive Qualified Touch Screen Controllers

Automotive maXTouch Key Features

| Key Features | Benefits |
|---|---|
| Automotive qualified | AEC-Q100 qualified Temperature range of up to -40° to +105°C |
| High level of analog filtering | Support of Single layer shield less sensors |
| Unlimited, unambiguous touch | Multi-touch support up to 16 simultaneous touches |
| High SNR through high voltage drive | Enables gloved hand operation |
| Smart processing with integrated 32-bit | Embedded single and dual-touch gestures Rejection of unintended touches such as a resting hand |
| Embedded post processing | Noise filtering. Improved EMI and ESD behavior |
| High scan speed | Up to 280Hz scan speed to support character recognition for in-host processing |

The right device for the right application

| Up to 6 inch touchscreens | Up to 7 inch touchscreens | For 7-8 inch touchscreens | Up to 10 inch touchscreens | Up to 12 inch touchscreens | Up to 14 inch touchscreens | Up to 20 inch touchscreens |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| mXT224S | mXT336S | mXT540E | mXT768E | mXT1188S | mXT1664S | mXT3432S |

maXTouch Automotive Devices

| Key Features | Benefits |
|--------------|--|
| MXT224S-A | 224 nodes. Targets larger touch pads or touchscreens up to 6" |
| MXT336S-A | 336 nodes. Provides the ultimate interface for automotive touchscreens with sizes up to 7" |
| MXT540E-A | Qualified up to 105°C. Addresses automotive touchscreens from 7" to 8" |
| MXT768E-A | Qualified up to 105°C. Addresses touchscreens up to 10" |
| MXT1188S-A | 1188 nodes. Ideally suited for touchscreens up to 12" |
| MXT1664S-A | 1664 nodes. Ideally suited to address touchscreens up to 14" or even larger |
| MXT3432S | 3432 nodes. For very large centerstack screens |



| Key Features | Benefits |
|---|---|
| Unlimited, unambiguous touch identification, tracking and reporting | <ul style="list-style-type: none"> Multi-touch support up to 16 simultaneous touches |
| Integrated gesture calculation (single and dual touch) | <ul style="list-style-type: none"> Single and dual touch gesture support – pinch, stretch, etc. |
| Smart processing with integrated 32-bit MCU and DSP engine | <ul style="list-style-type: none"> Classifying and rejecting unintended touch, e.g., a resting hand on the screen |
| Embedded post-processing algorithms | <ul style="list-style-type: none"> Noise filtering Improved EMI/ESD behavior Adjacent key suppression |
| Very fast response time <10 ms | <ul style="list-style-type: none"> Supports character recognition in host |
| High SNR | <ul style="list-style-type: none"> Fingertip, back of finger touches supported Gloved finger operation Single layer, shield-less sensors |
| Supports up to two screens and additional touch buttons 2 additional self capacitance channels (540E/768E-A) | <ul style="list-style-type: none"> Realize touch screen, buttons and proximity Single chip enables completely integrated centerstack designs |

To learn more and all your sampling needs, please visit - http://www.atmel.com/products/automotive/automotive_touch/
For evaluation kits, please contact sales.



Atmel Corporation 1600 Technology Drive, San Jose, CA 95110 USA **T:** (+1)(408) 441.0311 **F:** (+1)(408) 436.4200 | **www.atmel.com**

© 2014 Atmel Corporation. / Rev.: Atmel-45071A-maXTouch-Portfolio_E_US_062014

Atmel, Atmel logo and combinations thereof, Enabling Unlimited Possibilities, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN THE ATMEL TERMS AND CONDITIONS OF SALES LOCATED ON THE ATMEL WEBSITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS AND PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and products descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.