

Data sheet

16114.2 WE-LIGHT



Webeasy I/O light control module, 4 digital inputs, 2 relay outputs, If the bus connection fails, the outputs switch to preset, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

Business data

Article number	<u>16114.2</u>
Article name	WE-LIGHT
GTIN (EAN)	4044211207571
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	163 g
Weight per piece (including packaging)	203 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

Technical data

Dimensions

Length	95 mm
Width	71 mm
Height	60 mm

Connection data


Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm ²
Stripping length	6 mm
Torque	0.4 Nm

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2022-06-10
REACH Candidate Substance Note	No
RoHS Conform	yes

Media

di1	di2	OV	di3	di4	OV	L1	⊕	N		
						230V IN				
						WIELAND GST18/ SCREW (-ST)				
— A1	INTERNAL BUS	WE-LIGHT (-ST)						INTERNAL BUS	A1	— C
— A2									A2	— C
— A									A	— C
— B									B	— C
WIELAND GST18/ SCREW (-ST)						WIELAND GST18/ SCREW (-ST)				
230V OUTPUT-1						230V OUTPUT-2				
L1	⊕	N				L1	⊕	N		

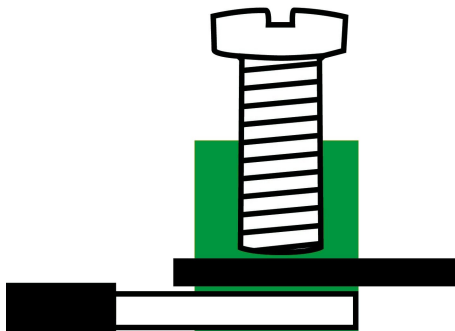

Accessories
