





ISSUE NUMBER
ORIGINAL

(1)

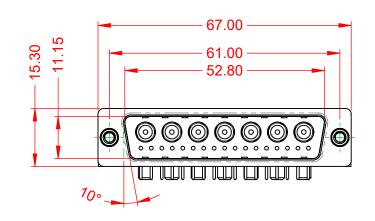




NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



OPERATING TEMPERATURE:	-55°C ~ 125°C
POWER/CO-AX CONTACT RATING: (IF PRESENT)	50Ω (IMPEDANCE)
SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE:	5A PER CONTACT 10mΩ MAX.
INSULATOR RESISTANCE: DIELECTRIC	5000MΩ min.

.XX ±0.13 .XXX ±0.05



		COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	COMBINATION			DATE: JAN. 01/20	19	
			CHECKED:	DATE:		
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-24W	7640-5N2	ISSUE	
YC	VOUD CONNECTION TO OUNLITY & SEDVICE		PART NUMBER: 629-24W	7640-5N2	1	



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



WITHSTANDING VOLTAGE:

1000V AC rms

