
	т	m	C	ן כ	0			
Z'	ØS							
o					LAYOUT	SHOWN AS EXAMPLE		
	Keying Shown a	as example						
CHARACTERISTICS	F	Connector dimension Dim Nominal]					
ØS 29.4 Max Shell Material : Composite Shell Plating : Olive drab Cadmium Shell Plating : Olive drab Cadmium Insulator : Thermoplastic Contacts : Copper Alloy				SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum						Country Juris FR	diction & Control List Not Listed	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories				PN: 8D513J04HB				
-Temperature Range : -65°C to +175°C -Salt Spray : 2000 hours				A 17-10-201	6 First Release			
				ISS DATE Designed By:	Latest modification - by Date:	/	CUSTOMER DRAWING	MOD N°
TITLE		TITLE	TITLE Composite Plug 8D series					
BASIC SERIES: 8D 5 - 13 J SHELL TYPE : Plug with RFI Shielding	J 04 H B			SCALE NA		eneral linear Tolerances: ±	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13		ORIEI CONTACT TYPE : PIN (15)		SOURIAU	J WWW.SO	URIAU.COM	This document is the prop SOURIAU it must not be reproduce communicated without per	d or
PLATING : J = Olive drab Cadmium		CONTACT TYPE : PIN (15)		FORMAT		DURIAU DRG N°		SHEET
				A3	C	3D513J04HB-C		1/2

ſ	Ŧ	۵	н г	m		0	
		Contact Layout					
4	×	$ \begin{array}{c} $					
		+.000 (0.00) +.150 (0.81) +.146 (3.71) +.035 (0.89) +.000 (0.00) 083 (2.11) 146 (3.71) +.035 (0.89)					
۵							
	+					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recor	oducts wl / either o
N						PN: 8E	Count FR
					A 17-10-20 ISS DATE Designed By:	16 First Release	
					TITLE	Genera	Compo al linear rances:
→					SOURIA		£
				_	FORMAT A3	SOU 8D	RIAU 513J(
L	Н	G	F	E	D	C	

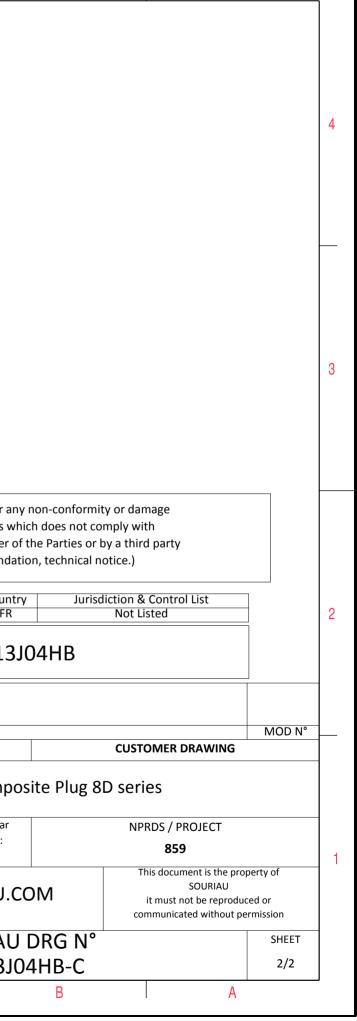

 \triangleright

σ