


# Diode Plug



**DLS 2**  
for SAKR-D

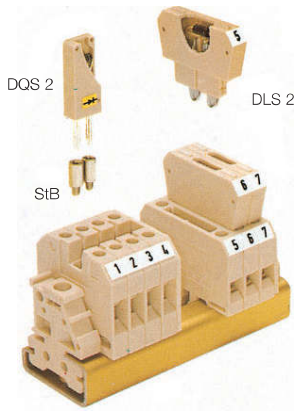

**SAKR-D**



**DLS 2**  
for SAKR-D




**SAKR-D**




**WSD 2.5**



**WTR 2.5 D**  
with diode plug  
with test sockets



**WTR 2.5 D**



**Dimensions**

Terminal width (+ assembly tolerance 0.2)	mm (in.)
Insulation stripping length	mm (in.)

**Connection data**

Screw connection, solid	0.5...4 mm <sup>2</sup>
Screw connection, flexible	0.5...4 mm <sup>2</sup>
Conductor cross-section	AWG 22...12

**VDE rated data**

Diode current	1 A
Diode reverse voltage	1000 V
Cross-section	4 mm <sup>2</sup>

**Ordering data**

**DLS 2** = Diode plug for lateral disconnection  
**DQS 2** = Diode plug for cross-connection

Type	Part No.
<b>DLS 2</b> without components	<b>0321060000</b>
<b>DLS 2</b> with wire link	<b>0547760000</b>
<b>DLS 2</b> with diode 1 N 4007	<b>0630160000</b>
<b>DLS 2</b> with diode 1 N 4007	<b>0547760000</b>
<b>SAKR-D, TS 32</b> with <b>DLS 2</b>	<b>0263660000</b>
<b>SAKR-D, TS 32</b> with <b>DLS 2</b> without components	<b>0413060000</b>
<b>SAKR-D, TS 32</b> with test sockets and <b>DLS 2</b> without components	<b>0413160000</b>
<b>SAKR-D, TS 32</b> Special design with test socket and 2 antiparallel diodes 1 N 4007, <b>without DLS 2</b>	<b>0606560000</b>
<b>SAKR-D, TS 32</b> with test sockets	<b>0412960000</b>
<b>SAKR-D, TS 32</b> with test sockets	<b>0546460000</b>

Type	Part No.
<b>DLS 2</b> without components	<b>0321060000</b>
<b>DLS 2</b> with wire link	<b>0547760000</b>
<b>DLS 2</b> with diode 1 N 4007	<b>0630160000</b>
<b>DLS 2</b> with diode 1 N 4007	<b>0547760000</b>
<b>SAKR-D, TS 35</b> with <b>DLS 2</b>	<b>0299560000</b>
<b>SAKR-D, TS 35</b> with <b>DLS 2</b> without components	<b>0185760000</b>
<b>SAKR-D, TS 35</b> with test sockets and <b>DLS 2</b> without components	<b>1175360000</b>
<b>SAKR-D, TS 35</b> Special design with test socket and 2 antiparallel diodes 1 N 4007, <b>without DLS 2</b>	<b>1175460000</b>
<b>SAKR-D, TS 35</b> with test sockets	<b>0299960000</b>

Type	Part No.
<b>WSD 2.5</b> without components	<b>1058760000</b>
<b>WSD 2.5</b> with wire link	<b>1058660000</b>
<b>WSD 2.5</b> with diode 1 N 4007	<b>1058560000</b>
<b>WSD 2.5</b> with diode 1 N 4007	<b>1058460000</b>
<b>WTR 2.5 D</b> with <b>WSD 2.5</b>	<b>1013500000</b>
<b>WTR 2.5 D</b> with <b>WSD 2.5</b> 105856	<b>1013600000</b>
<b>WTR 2.5 D</b> with <b>WSD 2.5</b> 105846	<b>1013700000</b>
<b>WTR 2.5 D</b> with <b>WSD 2.5</b> 105866	<b>1013200000</b>
<b>WTR 2.5 D</b> with test sockets and <b>WSD 2.5</b> 105856	<b>1013300000</b>
<b>WTR 2.5 D</b> with test sockets and <b>WSD 2.5</b> 105846	<b>1013400000</b>
<b>WTR 2.5 D</b> with test sockets and <b>WSD 2.5</b> 105866	

Type	Part No.
<b>WTR 2.5 D</b>	<b>8017050000</b>
<b>WTR 2.5 D</b> with diode 1 N 4007	<b>8016820000</b>
<b>WTR 2.5 D</b> with diode 1 N 4007	<b>on request</b>
<b>WTR 2.5 D</b> with 2 antiparallel diodes 1 N 4007	<b>1014600000</b>
<b>WTR 2.5 D</b> with test sockets and Diode 1 N 4007	<b>1014700000</b>
<b>WTR 2.5 D</b> with test sockets and Diode 1 N 4007	<b>1014800000</b>
<b>WTR 2.5 D</b> with test sockets and 2 antiparallel diodes 1 N 4007	

Maximum values for built-in components: Length 23 mm (.91 in.), diameter 3.5 mm (.18 in.), output 0.5 Watt, limit temperature 100°C