


PART NO.		<b>P2RFC-2516-XX</b>		
REV	DESCRIPTION	DWN	DATE	APPROVED
-	RELEASE	DM	8/27/20	JDMc

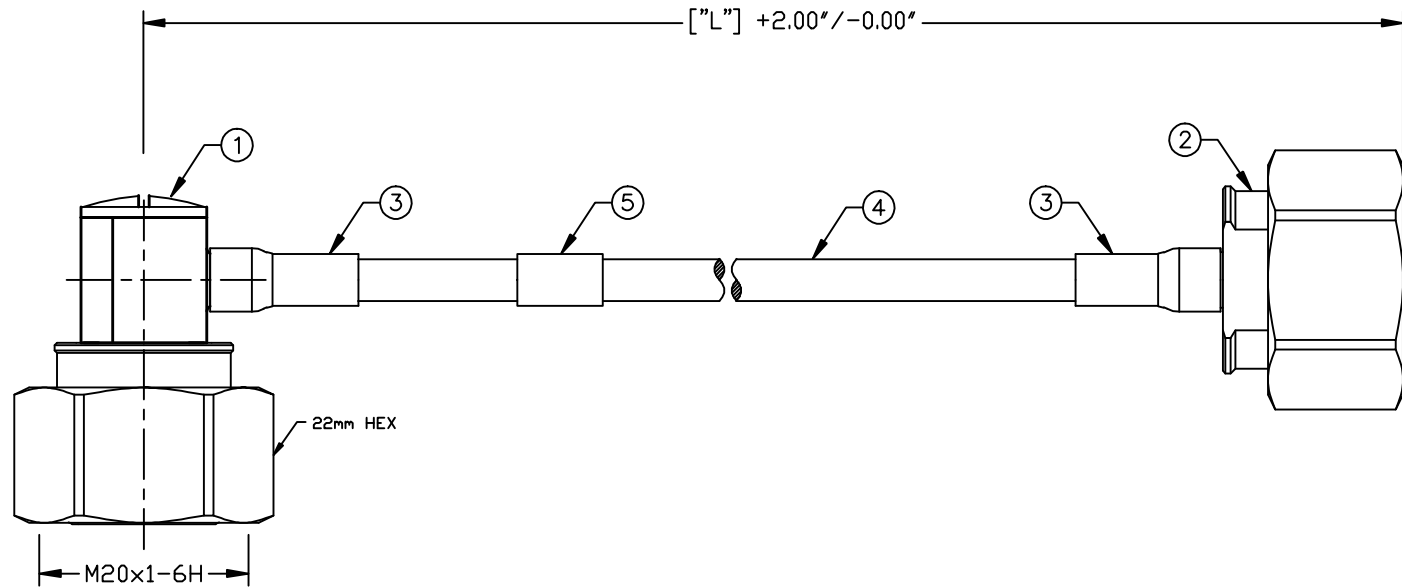

P2RFC-2516-XX  
 [\"L\"] LENGTH IN INCHES  
 CONFIGURATION ID  
 CABLE ASSEMBLY DESIGNATOR

**SPECIFICATIONS:**

IMPEDANCE: 50 Ohms  
 FREQUENCY RANGE: 0-3 GHz  
 3RD ORDER IM: ≤-160 dBc @ 700MHz & 1900MHz  
 3RD ORDER IM TEST METHOD: 2x43dBm CARRIERS  
 VSWR: ≤1.25:1 THRU 3GHz

NOTE: BOTH CONNECTORS WILL HAVE PROTECTIVE CAPS ON

5	LABEL	1	CUSTOM LABEL/SHRINK	WHITE
4	TFT-402-LF	1	PLENUM CABLE	---
3	TUBING	2	HEAT SHRINK	BLACK
2	RFD-43MS-SR2	1	4.3/10 MALE CONNECTOR	WHITE BRONZE
1	RFD-43MRA-SR2	1	4.3/10 MALE RIGHT ANGLE	WHITE BRONZE
#	PART NUMBER	QTY	DESCRIPTION	FINISH

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN	8/27/20
JDM	
CHECKED	
ORJ DRAWN	10/10/16
C. ZUNIGA	

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

**RFconnectors**  
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD.  
 SAN DIEGO, CA 92126  
 (858) 549-6340  
 (858) 549-6345 FAX

**4.3/10 MALE R/A TO 4.3/10 MALE**  
**LOW PIM CABLE ASSEMBLY**

SIZE	CABLE GROUP	DWG NO.	REVISION
A	-	<b>P2RFC-2516-XX</b>	-
SCALE:	ENGINEERING ID:	SHEET 1 OF 1	
NTS	000000		