


| ITEM NO. | PART NUMBER | DESCRIPTION   | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1        | 30-00944    | Wire, 9C BC, 26 AWG, UL20280, 300V, 80C, 5.8 mm, braided shield, FT2, TPU | 1    |                 |

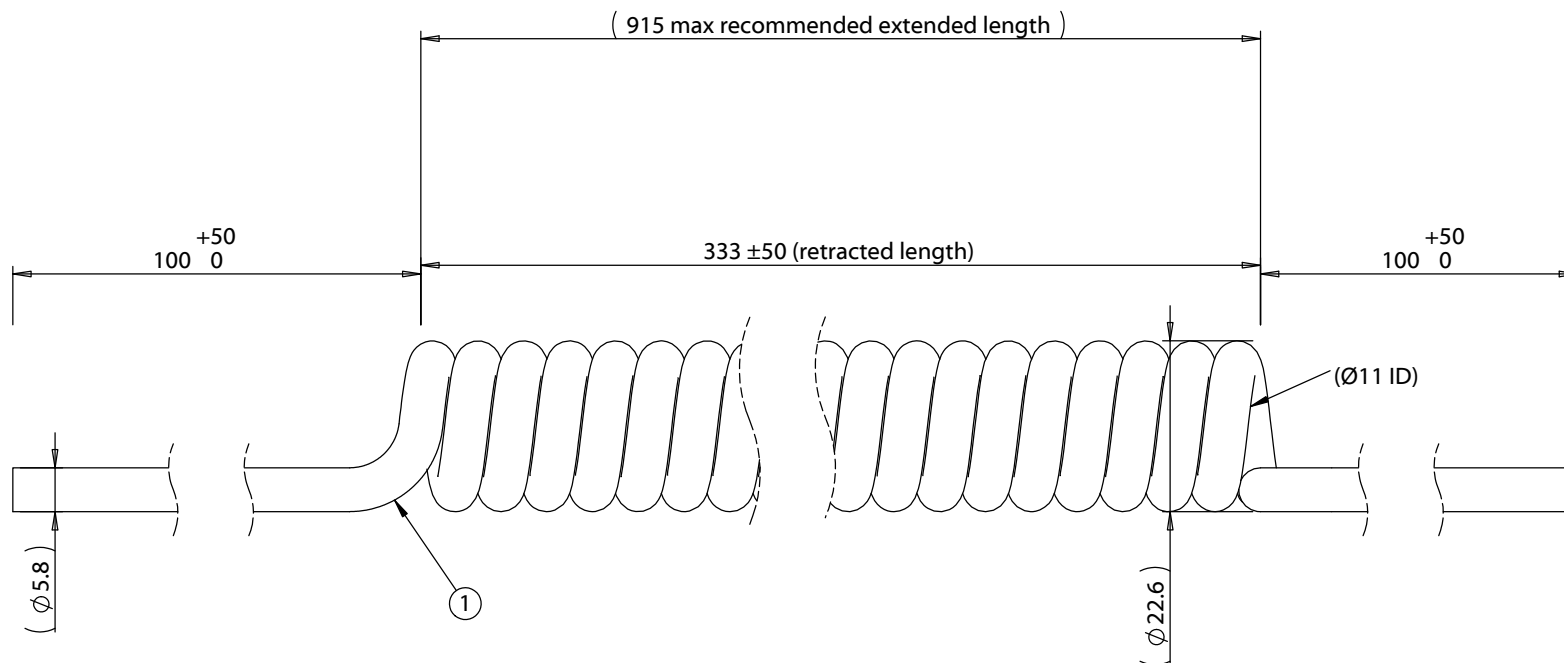

**Notes:**  
Total wire length for resistance calculation: 3250 mm

|           |            |                 |  |   |  |
|-----------|------------|-----------------|--|---|--|
| Revision: | Date:      | Description:    | Prepared:  | Notes:<br>RoHS and REACH compliant<br>Phthalate and halogen free<br>Function test: no open, no short circuit, no intermittent | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118<br/>fax 1.541.323.4202 web tensility.com</p> |
| A         | 10/18/2018 | Initial release | Verified:  |   |  |
|           |            |                 | Dimensions are in millimeters.<br>Tolerances:<br>X: ± 0.5 mm<br>X.X: ± 0.3 mm<br>X.XX: ± 0.05 mm | Description:<br>Coiled cable, 1115 mm, 9C blunt cut to same, 26 AWG, 5.8 mm, TPU, shielded, 30-00944 wire                     | Size:<br>A   |
|           |            |                 |  |   | Part number:<br>31-00138   |
|           |            |                 |  |   | Scale: 1:1   |
|           |            |                 |  |   |  |
|           |            |                 |  |   | Sheet 1 of 1   |

5

4

3

2

1