

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

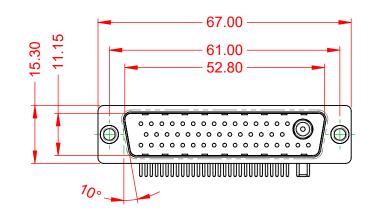



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

OPERATING TEMPERATURE:

WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING:20A (CURRENT)(IF PRESENT)SIGNAL CONTACT CURRENT RATING:5A PER CONTACTSIGNAL CONTACT RESISTANCE:10mΩ MAX.INSULATOR RESISTANCE:5000MΩ min.


 .X
 ±0.25

 .XX
 ±0.13

 .XXX
 ±0.05

1000V AC rms

-55°C ~ 125°C



	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/201	9
			CHECKED:	DATE:	
го	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2
/ES CY.		SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-47W1650-211		ISSUE
			PART NUMBER: 629-47W	1650-2T1	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

