

工	G	нт. П	т	C C



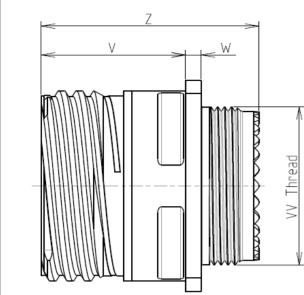

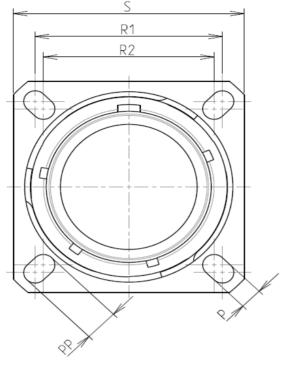

CHARACTERISTICS

4

ω

 \sim

_

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy 0.8 μm minim
-Durability	: 500 Mating cycles
-Delivered with Souriau	a contacts and Accessories
-Temperature Range	_: -65°C to +175°C
-Salt Spray	: 500 hours

: 14.89 g ± 10%

8D 0

G

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M15x1-6g			

)	п	. m	c	J	1	0		σ			
-						~~	[]
VV Thread		S R1 R2 A A A A A A A A A A A A A A A A A A				LAY	YOUT SHOWN AS EX	AMPLE			4
	Koving Chow	n as example									
oy 0.8µm minimum ies		Connector dimension Dim Nominal P 3.25±0.2 PP 4.93±0.2 R1 20.62 R2 18.26 S 26.2±0.3 V 20.83+0/-1.25 W 2.1/2.5 Z 31.5 Max VV THREAD M15x1-6g				due to a use le Specifications (professio	not be liable for any of the Products whi issued by either of onal recommendati Country FR N: 8D011W	ich does not com the Parties or by ion, technical no y Jurisdie	nply with y a third party		2
				A 08-10-2	016 First	Release					
			-	ISS DATE Designed By:	E La	itest modificatio Date:	on - by		CUSTOMER DRAWING	MOD N°	
			-	TITLE			Aluminium	Receptacle	e 8D series		
- 11 W	04 S A			SCALE NA]@	General linear Tolerances: ±		NPRDS / PROJECT 859 This document is the pro	perty of	1
ORIENTATION : A CONTACT TYPE : SOCKET(500 Matings)				SOURIAU WV		WWW.	WWW.SOURIAU.COM SOURIAU it must not be reproduced o communicated without permiss				
		CONTACT LAY	OUT : 11-04	FORMAT A3	I		SOURIAU 8D011W			SHEET 1/2	
i	F	E		D		С		B	A		J
		Ť									

_	т	۵	н т	m		0
		Contact Layout				Panel Cutor
4	-×	$ \begin{array}{c} $			A	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		on X-axis Y-axis (mm) (mm) +.065 (1.65) +.065 (1.65) +.065 (1.65)065 (1.65) 065 (1.65)065 (1.65) 065 (1.65) +.065 (1.65)			¥ ~	
ယ						Dim ØA ØAA R1 ØT
	+					SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either o (professional recommendat
27						Countr FR
					A 08-10-20 ISS DATE	PN: 8D011V
					Designed By:	Date: Aluminiun
<u> </u>					SCALE NA SOURIAI	General linear Tolerances: ±
					FORMAT A3	SOURIAU 8D011W
	Н	G	F	E	D	C

