
т <u>о</u>	н 	ш	D		0		د	>
×								
					LAYOUT	T SHOWN AS EXAMPLE		
	Keying Shown as ex	ample						
CHARACTERISTICS		Connector dimension						
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer	v	DimNominalØS41.7 MaxZ'31.5 MaxV THREADM31x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D521M77SE				
 -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories 								
-Temperature Range : -65°C to +200°C			A	08-10-2016	First Release			
-Salt Spray : 2000 hours			ISS Design		Latest modification - b Date:	ру	CUSTOMER DRAWING	MOD N°
				TITLE Composite Plug 8D series				
BASIC SERIES: 8D 5 - 21 M 7 SHELL TYPE : Plug with RFI Shielding	77 S E		SC/			General linear Tolerances: ±	NPRDS / PROJECT 859	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ONTACT TYPE : Standard Crimp Contact ORIENTATION : E				SOURIAU WWW.SOURIAU.COM This document is the proper SOURIAU it must not be reproduced communicated without perm			duced or
PLATING : M = Nickel		CONTACT LAYOUT			S	OURIAU DRG N	 °	SHEET
PLATING . W - NICKEI			A	2		8D521M77SE-C		1/2

	I	Q	нт — — — — — — — — — — — — — — — — — — —	m		0
4		Contact Layout 77				
		2#8 Triax				
دى ~	Ctc A B C D E F G H J K L L M N P R S T U V	21-77 X Y 1.96 8.38 5.46 7.67 8.51 5.79 10.46 2.82 10.46 -2.82 8.51 -5.79 5.46 -7.67 1.96 -8.38 0 -5.41 -1.96 -8.38 -5.46 -7.67 -8.51 -5.79 -10.46 -2.82 -10.46 2.82 -10.46 2.82 -10.46 2.82 -10.46 2.82 -10.46 2.82 -10.46 2.82 -10.46 8.38 -5.46 7.67 -1.96 8.38 -4.57 0 4.57 0				SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati Country FR PN: 8D521N
		4.57			A 08-10-201 ISS DATE Designed By: TITLE SCALE	L6 First Release Latest modification - by Date: Compose General linear
					SCALE NA SOURIAL FORMAT A3	Tolerances:
L	Н	G	F	E	D	C

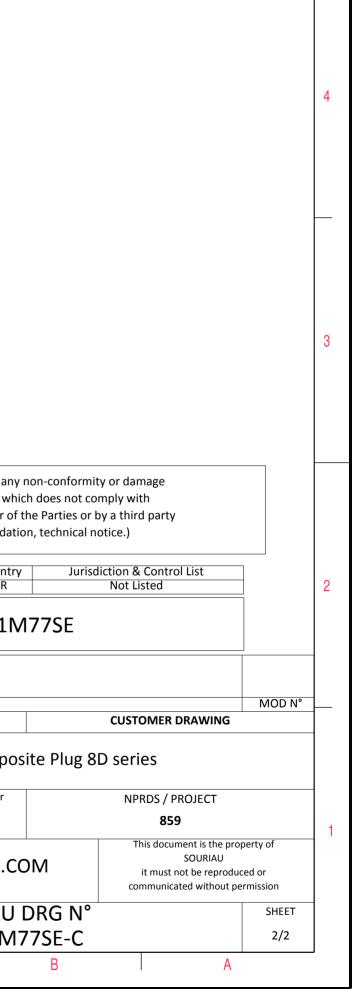

Þ

σ