

### **OLGA-WAS**

### Asymmetric beam for wall-washing

### **SPECIFICATION:**

**Dimensions** Height **ROHS** compliant Ø 29.7 mm 17.3 mm yes 🕕



### **MATERIALS:**

Component **OLGA-WAS** 

Type Single lens Material **PMMA** 

Colour clear

**Finish** 

### **ORDERING INFORMATION:**

Component

C16307\_OLGA-WAS


» Box size: 476 x 273 x 292 mm

Qty in box MOQ MPQ Box weight (kg) 792 132 66 6.5

Published: 14/01/2019 Last update: 13/02/2023 Subject to change without prior notice 1/7



# PRODUCT DATASHEET C16307\_OLGA-WAS

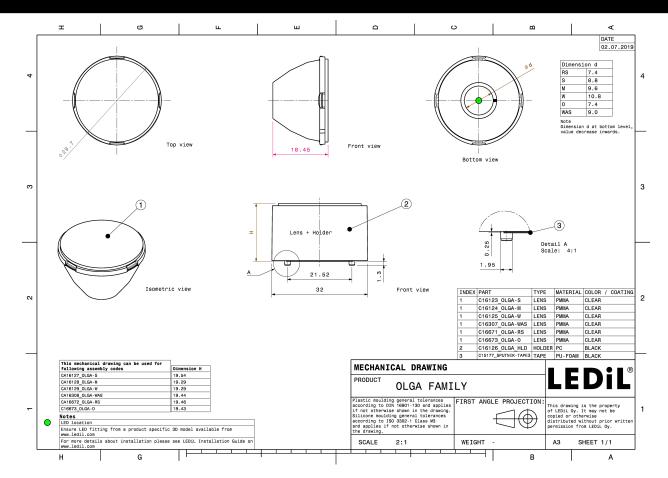


See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>



# **OPTICAL RESULTS (MEASURED):**

### bridgelux


LED Vesta TW 6mm DP
FWHM / FWTM Asymmetric
Efficiency 74 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White



# **CITIZEN**


Required components:

EED CLU7B2
FWHM / FWTM Asymmetric
Efficiency 73 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:




# **CITIZEN**

LED CLU7L3
FWHM / FWTM Asymmetric
Efficiency 71 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:



# **CITIZEN**

LED CLU7R3
FWHM / FWTM Asymmetric
Efficiency 70 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:



Published: 14/01/2019



# **OPTICAL RESULTS (MEASURED):**

# **CITIZEN**


CLU7S3

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ Asymmetric

Efficiency 76 %

Peak intensity 1.2 cd/lm LEDs/each optic

Light colour White Required components:



### CREE - LED

LED XHP35 HD


FWHM / FWTM Asymmetric

Efficiency 73 %

Peak intensity 0.9 cd/lm

LEDs/each optic 1 White Light colour

Required components:



### CREE - LED

LED XP-E2


FWHM / FWTM Asymmetric

Efficiency 76 %

Peak intensity 1.3 cd/lm

LEDs/each optic

Light colour White Required components:



### CREE - LED

XP-L2

FWHM / FWTM Asymmetric


Efficiency 72 %

Peak intensity 1 cd/lm

LEDs/each optic

Light colour

White Required components:






# **OPTICAL RESULTS (MEASURED):**

#### OSRAM Opto Semiconductors


LED OSCONIQ P 3737 (3W version)

FWHM / FWTM Asymmetric
Efficiency 75 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:



# **SAMSUNG**

LED LH351D
FWHM / FWTM Asymmetric
Efficiency 77 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:




Published: 14/01/2019



### **OPTICAL RESULTS (SIMULATED):**




LED XHP35.2 HD FWHM / FWTM Asymmetric Efficiency 73 % Peak intensity 0.8 cd/lm LEDs/each optic Light colour White



### CREE - LED


Required components:

LED XHP35.2 HI FWHM / FWTM Asymmetric Efficiency 74 % Peak intensity 1.1 cd/lm LEDs/each optic 1 White Light colour Required components:




### **ELUMINUS**

LED CXM-3 FWHM / FWTM Asymmetric Efficiency 93 % Peak intensity 1 cd/lm LEDs/each optic 1 Light colour White Required components:



### **ELUMINUS**

CXM-4 FWHM / FWTM Asymmetric 93 % Efficiency Peak intensity 0.9 cd/lm LEDs/each optic White Light colour Required components:



Published: 14/01/2019



# PRODUCT DATASHEET C16307\_OLGA-WAS

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

# Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405, Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

# Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

7/7

www.ledil.com/ where\_to\_buy