
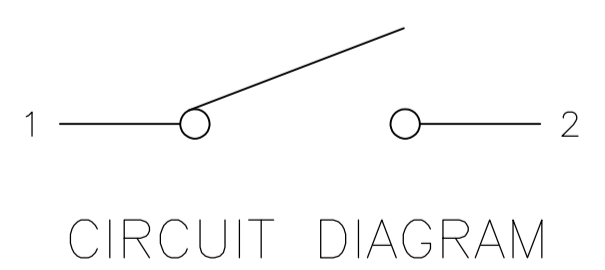
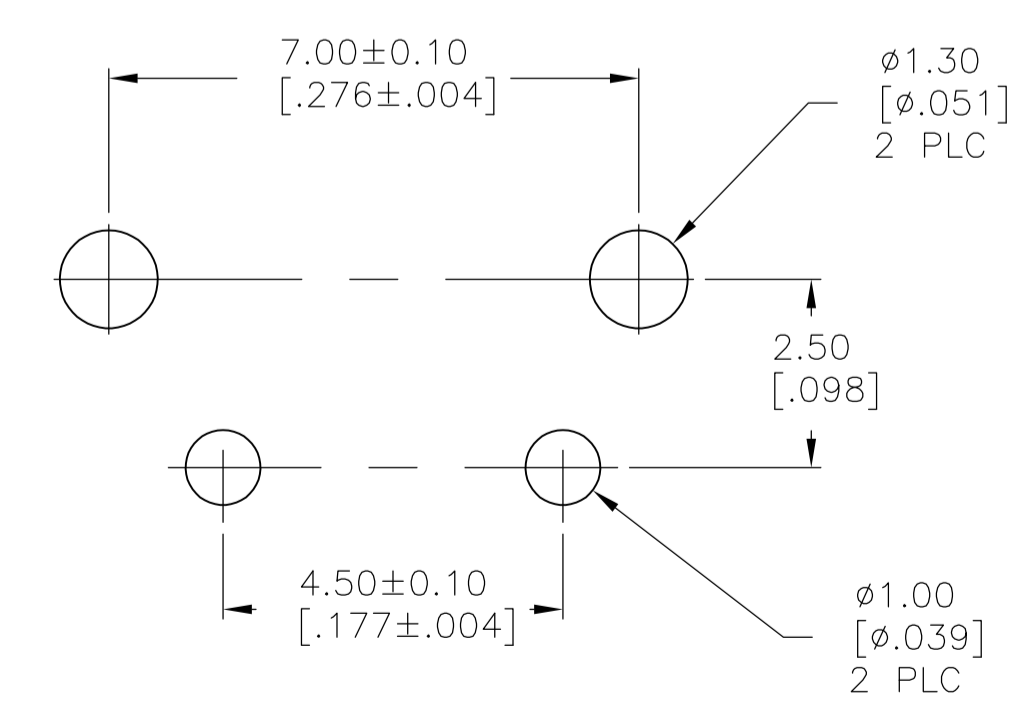
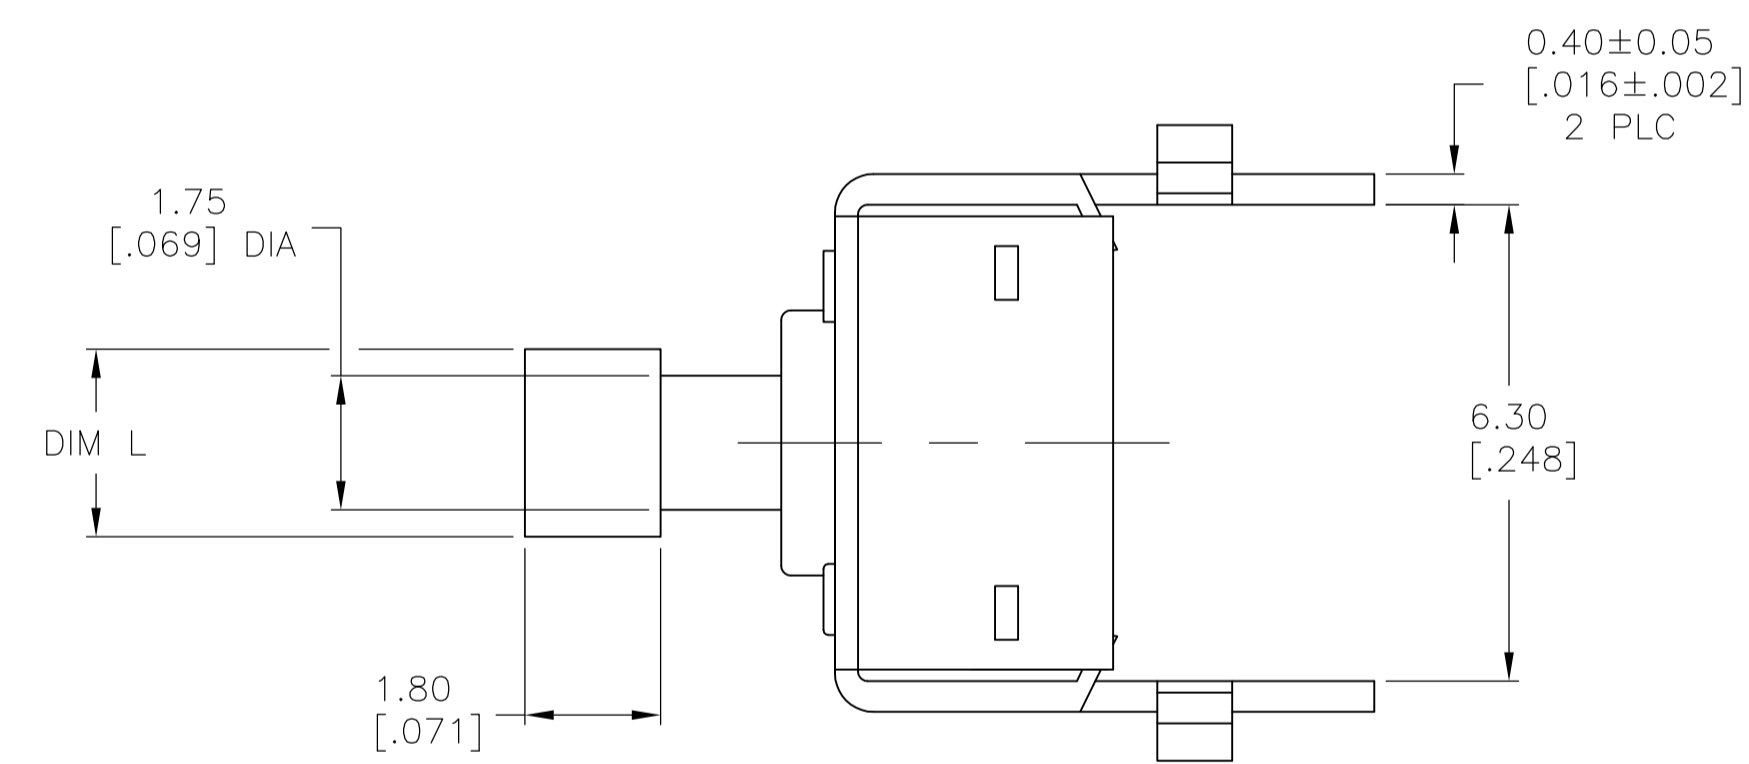
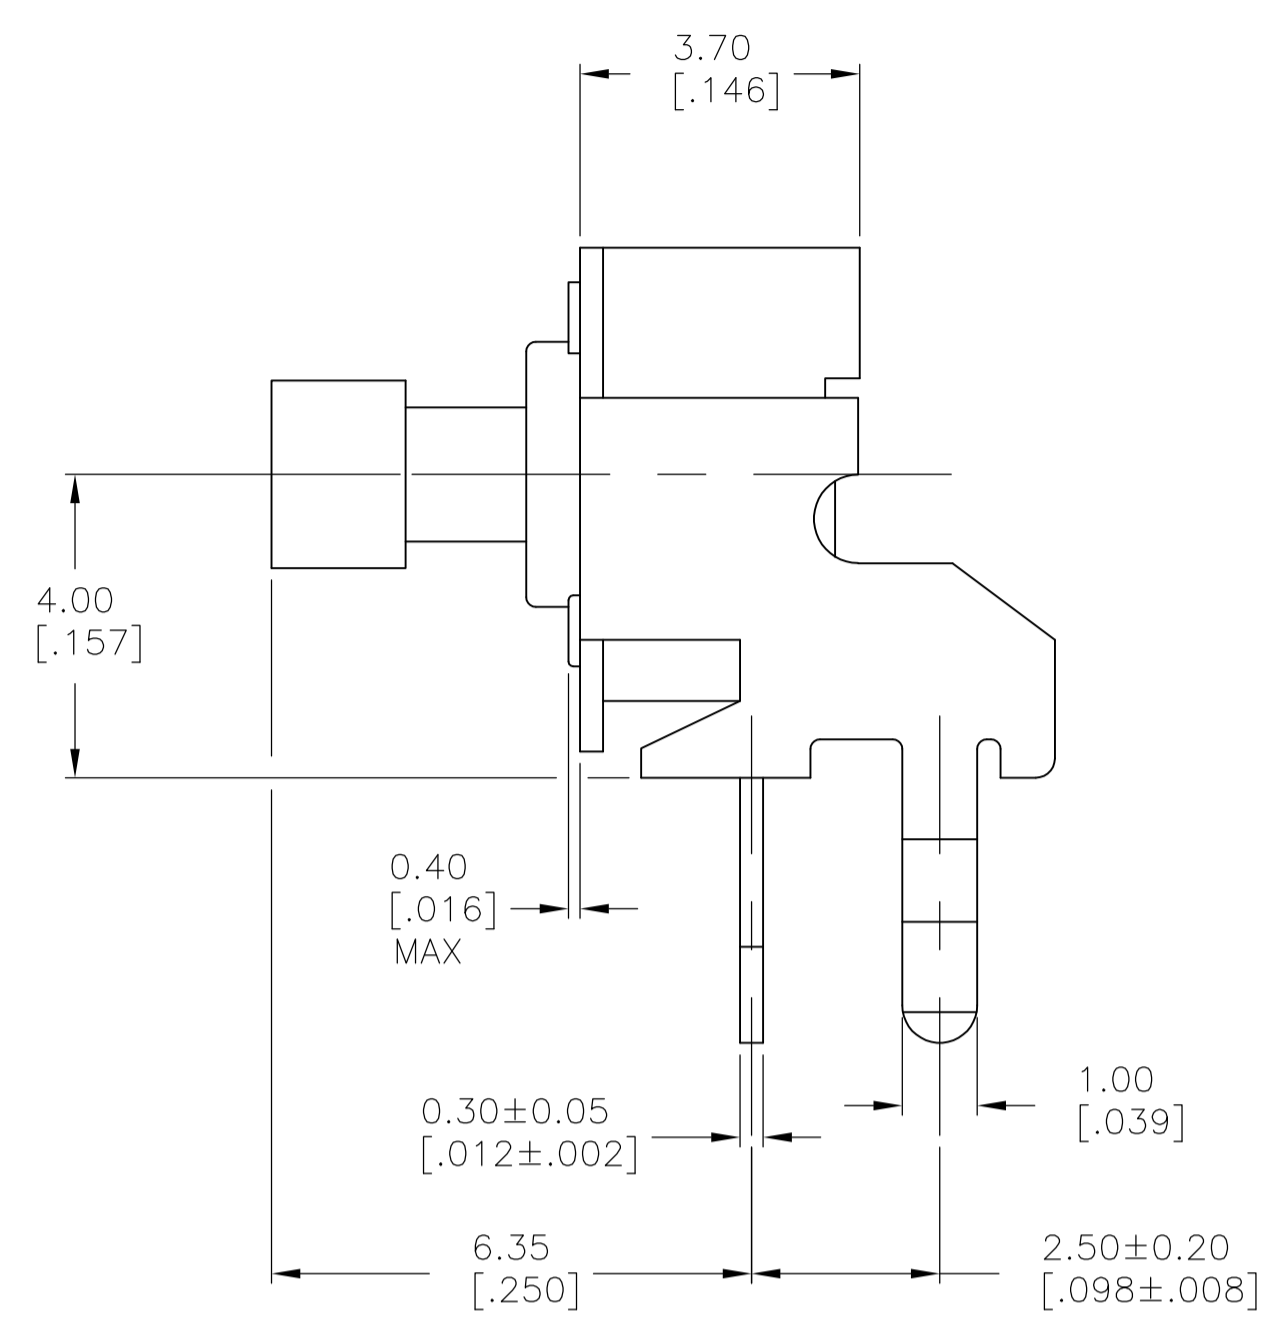


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
B1		REVISED PER ECO-17-002272	21JUN2017	SK	AS

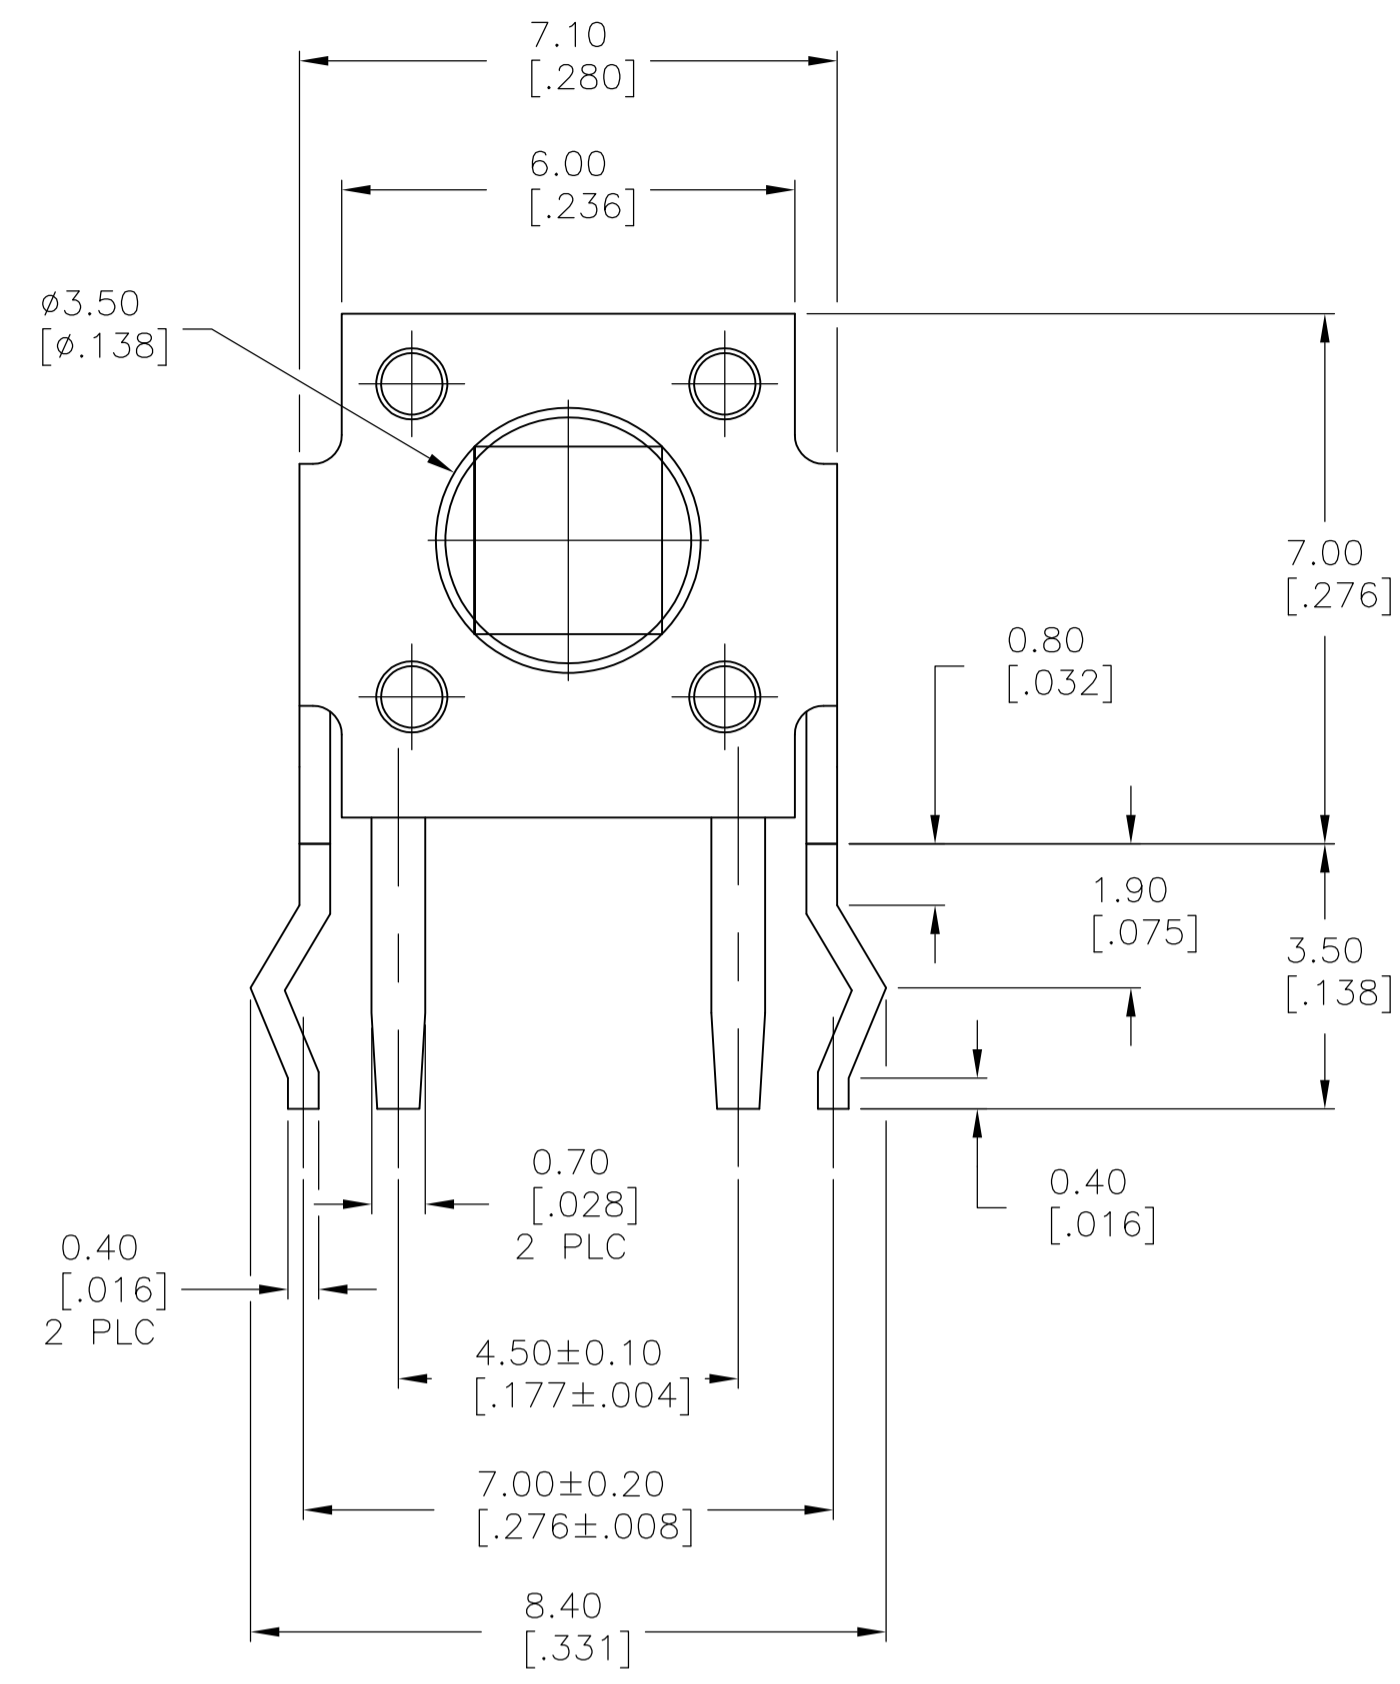

**SPECIFICATIONS:**

**Materials:**  
 Case, Nylon 66, UL94HB, Black finish  
 Bracket, Stainless Steel  
 Actuator, Nylon 66, UL94HB, see P/N table for finish  
 Moving contact, Copper Alloy, Silver finish  
 Fixed contact/Terminal, Copper Alloy, Silver over Nickel finish

**Electrical:**  
 Max Contact Rating, 50mA@ 24V DC, Per EIA-448, Method 6  
 Min Contact Rating, 10microamp@1V DC  
 Initial Contact resistance, 50 milliohms max, Per EIA-364-23B, each position  
 Insulation Resistance, 1000 Megohm min. Per EIA-364-21C each position  
 Dielectric strength, 500 V AC for 1 minute, Per EIA-364-20B, Condition 1, each position.  
 Life Expectancy, 100,000 cycles

**Mechanical:**  
 Actuation force, SEE P/N TABLE  
 Actuation Travel, .25 +/- .10 mm  
 Life Expectancy, 100,000 cycles min (2 cycles per second and 150% actuation force), Per EIA-448 Methods 8 and 9  
 Vibration, Per EIA 364-28D, Condition VII, Level E  
 Mechanical Shock, Per EIA-364-27C, Condition A

**Environmental:**  
 Operating Temperature, -35 to +85 degrees C, Per EIA-448, Method 10  
 Storage Temperature, -35 to +85 degrees C  
 Humidity and Temperature Cycling Per EIA-364-31B, Method III  
 Thermal Shock, Per EIA-364-32C, -35 to +85 degrees C  
 Solderability, Per EIA-364-52, Class 2, Category 1, Temp, 245 degrees C max, Time, 2.5 seconds max, 95% Minimum coverage  
 Resistance to Solder Heat, Per 109-202, Condition B  
 1. No change in initial electrical and mechanical characteristics

**NOTES:**

- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003(ROHS).

	2.80[.110]	YELLOW	260±50 GF	FSMRACDAAH	1825968-3
	2.80[.110]	BLACK	160±50 GF	FSMRACDAH	1825968-2
OBSOLETE	2.40[.094]	BLUE	160±50 GF	FSMRACDH	<del>1825968-1</del>
	DIM L	ACTUATOR BUTTON COLOR	ACTUATION FORCE	ALCO PART NO.	TYCO PART NO.

RECOMMENDED HOLE LAYOUT  
 TOLERANCE ±.002 UNLESS OTHERWISE NOTED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN	BROWN	13FEB2007	TE Connectivity
		CHK	M SARVER	13FEB2007	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.30[.012] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC		TACT SWITCH, R/A, SQUARE ACTUATOR, 6.0 mm, HIGH TEMP, FSMRACD	
MATERIAL		FINISH		SIZE	RESTRICTED TO
				WEIGHT	0.000000
				SCALE	10:1
				DRAWING NO	A100779
				PART NO	1825968
				SHEET	1 of 1
				REV	B1