

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



| ISSUE NUMBER | |
|--------------|---|
| ORIGINAL | 1 |

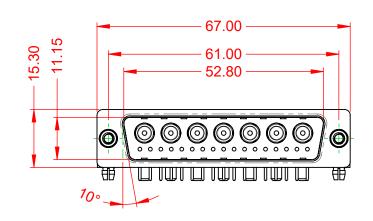




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

WITHSTANDING VOLTAGE:


THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, GOLD FLASH PLATED



| OPERATING TEMPERATURE: | -55°C ~ 125°C |
|--|-----------------------------|
| POWER/CO-AX CONTACT RATING: (IF PRESENT) | 20A (CURRENT) |
| SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE: | 5A PER CONTACT 10mΩ MAX. |
| INSULATOR RESISTANCE: DIELECTRIC | 5000MΩ min. |

.X ±0.25 .XX ±0.13 .XXX ±0.05

1000V AC rms



| | | | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | | |
|----------------------|----------------------------|---|---------------------|--------------------------------------|--------------------|----|-------|
| | | | DRAWN: C.B | | DATE: JAN. 01/2019 | | 19 |
| | | | CHECKED: | | DATE: | | |
| | EDAC INC | EDAC INC THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND | SCALE: (IN C.A.D. ? | 1:1) | SHEET 1 | OF | 2 |
| | TORONTO, ONTARIO CANADA |) SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS | DRAWING NUMBER: | 629-24W7 | 7240-2T5 | | ISSUE |
| YOUR CONNECTION TO Q | QUALITY & SERVICE | | PART NUMBER: | 629-24W | 7240-2T5 | | 1 |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

