

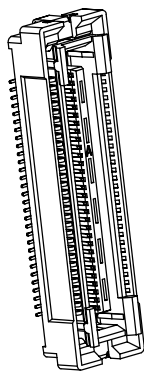
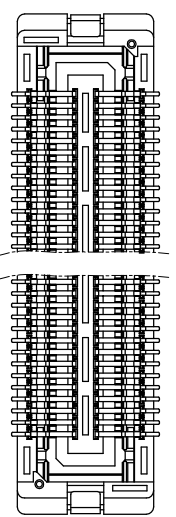


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	BACH PRODUCTION INTIAL RELEASE	2022.05.31	廖昌红

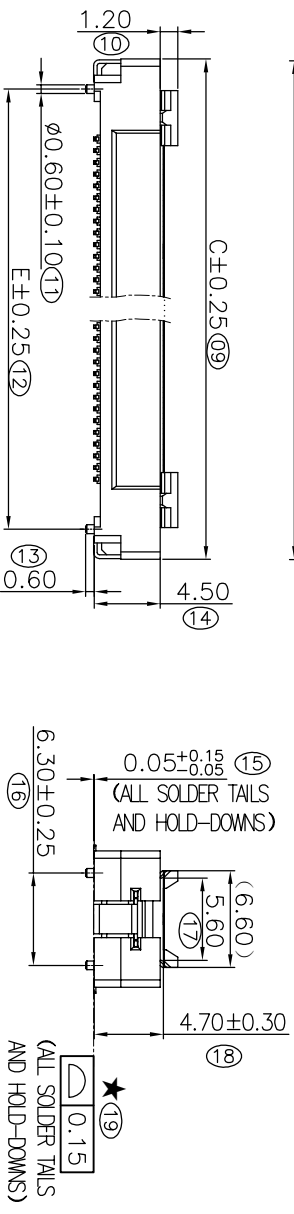

Z DIRECTION : ±0.5mm
 Y DIRECTION : ±0.5mm
 X DIRECTION : ±0.5mm
 FLOATING RANGE

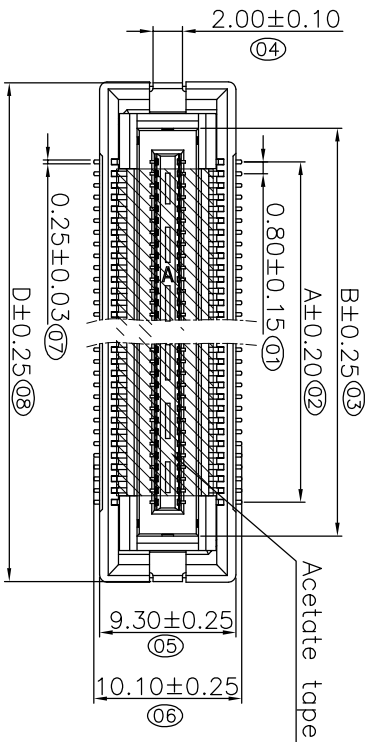

Pin NO.	A	B	C	D	E
2x30	23.20	27.80	34.10	34.00	30.00
2x40	31.20	35.80	42.10	42.00	38.00
2x50	39.20	43.80	50.10	50.00	46.00

Ordering Information


G GBC203 - XX XX B 001 C 1 A X

No. Of Pins Per Row
 30 40 50

Standard Plating
 02=Gold Flash
 Selective Plating
 09=3u"AU/Gold Flash

Color
 1=Black

Standard Packing
 H=Acetate tape
 +Tape&Reel

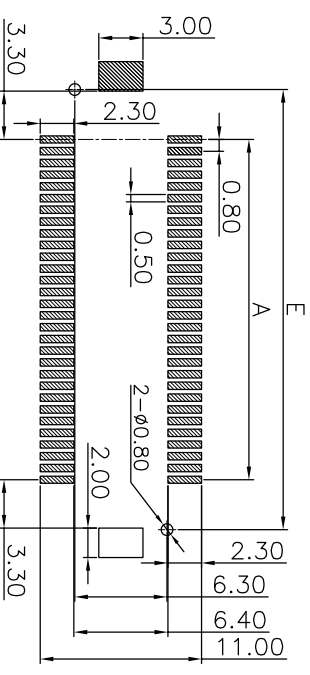

Specifications
 Current Rating:0.5Amp
 Insulation Resistance:500MΩMin.
 Dielectric Withstanding Voltage:250VAC
 Contact Resistance:100mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

☆All materials must meet GREENCONN hazardous substances control standards.
 ★: Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 ☆: Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Recommended P.C.Board Layout
 (Tolerance:±0.05)

Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV. 01 UNIT mm SCALE: 2:1

3RD ANG PROJ.

GENERAL TOLERANCE
 X.±5.0° X.±0.30
 X.±3.0° X.±0.25
 .XX±2.0° .XX±0.15
 .XXX±1.0° .XXX±0.10

DESIGNED: 廖昌红 DATE:2022.05.31
 CHECKED: 林万辉 DATE:2022.05.31
 APPROVED: 邱国延 DATE:2022.05.31

DWG. NO. GBC203-CB001
 PART NO. GGBC203-XXXXXB001C1AX

TITLE:
 0.80mm PITCH BTB FLOATING CONNECTOR

