
| | 12 | 11 | 10 | | 9 | 8 | 7 | 6 | | 5 | 4 | 3 | 2 | 1 |
|---|--------------------|-----------------------|--------------------|-----------------------|--------------|---------------------|---------------------|--------------|---------------|---------------|---|---|---|---|
| | LOOSE | PIECE | TAPE M | OUNTED | | | SPECI | IFICATIONS | | | | | | |
| н | MATERIAL NUMBER | ENGINEERING NUMBER | MATERIAL NUMBER | ENGINEERING NUMBER | STUD SIZE | "S" ±.005 [0.13] | "W" ±.010 [0.25] | "C" MIN. | "L" MAX. | "H" | | | | |
| | 192030156 | C-T-328-08 | 192030098 | C-T-328-08T | 8 | .173 [4.39] | .375 [9.53] | .303 [7.70] | .785 [19.94] | 1.234 [31.34] | | | | |
| | 192030099 | C-T-328-10 | 192030100 | C-T-328-10T | 10 | .198 [5.03] | .575 [9.55] | .505 [7.70] | .700 [19.94] | 1.204 [01.04] | | | | |
| | 192030182 | C-T-330-14 | 192030101 | C-T-330-14T | 14 | .265 [6.73] | .530 [13.46] | .393 [9.98] | .952 [24.18] | 1.234 [31.34] | | | | |
| G | 192030158 | C-T-340-38 | | | 38 | .390 [9.91] | .592 [15.04] | .468 [11.89] | 1.056 [26.82] | | | | | |

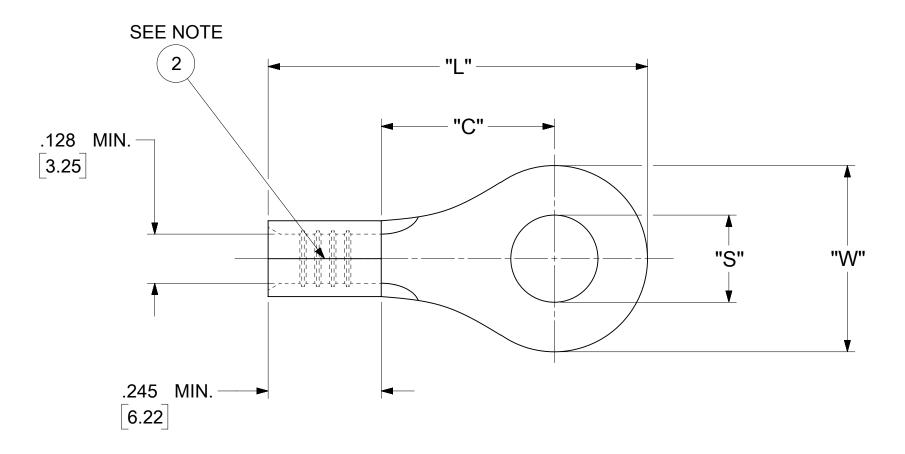

8

7

6

NOTES:

F

E

D

С

В

- MATERIAL: COPPER (STOCK THICKNESS .040±.001 [1.02]) PLATING: WATTS BATH NICKLE (.0002 MIN)
 BRAZED SEAM
- 3. WIRE SIZE: 12 10 AWG
 - 4.0 6.0 MM²
- 4. MAX. OPERATING TEMP : 650 °F

343 °C

- 5. "UL" LISTING #E32244
 - "CSA" LISTING #18689
- 6. ALL DIMENSIONS IN INCHES/[MM].
- 7. PARTS ARE ROHS COMPLIANT.
- 8. DIMS. SHOWN ARE FOR REFERENCE ONLY.


| DOCUMENT STATUS | | RELEASE DATE | 2019/08/05 | 20:29:0 | | |
|---|--|--------------|------------|---------|---|--|
| CORMAT: Englega-master-tb-prod-C REVISION: D AFE: 201801/18 | | 11 | 10 | | 9 | |

| | | | | | | | | | | | | | | | | | в |
|-----------------------|--------------------------------------|--|------------------------|-------|------|--------------------------------|---------|-------------|------------|-----------------------|---------------------------|----------|------|----------|----------|----------|---|
| SYMB | OLS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION UNITS SCALE CURRENT REV DESC: MIGRATION TO | | | | | | | | | | | | | | | 1 |
| | | DIMENSION UNITS SCALE | | | | CURRENT | REV DES | C: MIGRATIO | N TO | | | | | | | | |
| = 🕅 | 0 | INCH/MN | / N | ΤS | E | ECTR/NX | | | | | n | no | 16 | X | | | |
| F = | 0 | - | L TOLERA | | ; | | | | | | | | | | | | - |
| ▼= | 0 | MM INCH | | | | EC NO: 621658 | | | | | RING TONGUE TEMP-TERMINAL | | | | | | |
| ≶∕ = | 0 | 4 PLACES | PLACES ± ± | | | DRWN: | MINLW | 2019/07/26 | | 650 °F MAX VERSAKRIMP | | | | | | | |
| | _ | 3 PLACES | ± | ± .00 | D5 (| CHK'D: GROJAS01 | | | 2019/07/31 | | | | | | | | |
| = 🕷 | 0 | 2 PLACES | CES ± 0.13 ± .01 | | | APPR: | JMACNE | IL | 2019/08/05 | | PRODUCT CUSTOMER DRAWING | | | | | | |
| √ - - | 0 | 1 PLACE | ± 0.25 | ± | - | INITIAL | REVISIO | N: | | DOCI | UMENT NUMBER | - | | DOC TYPE | DOC PART | REVISION | A |
| ⊠ = | 0 | 0 PLACES | ± | ± | [| DRWN: | JJ | | 1984/11/28 | | 19203 | 0156 | | PSD | 000 | ^ | |
| | 0 | ANGULA | R TOL | ± 0.5 | 5° / | APPR: | JMACNE | IL | 2019/08/05 | | 19203 | | r3D | 000 | A | | |
| 🔳 = | 0 | DRAFT W | DRAFT WHERE APPLICABLE | | | THIRD ANGLE PROJECTION DRAWING | | | SERIES | MATE | ERIAL NUMBER | CUSTOMER | | | SHEET N | NUMBER | |
| ~ = | = 0 MUST REMAIN WITHIN DIMENSIONS | | | | | \odot | | C-SIZE | 19203 | | SEE TABLE | GENERA | RKET | T 1 OF | | | |
| | | 5 | | | | 4 | | | 3 | | 2 | | | | 1 | | |

PARTS ON TAPE

G

С

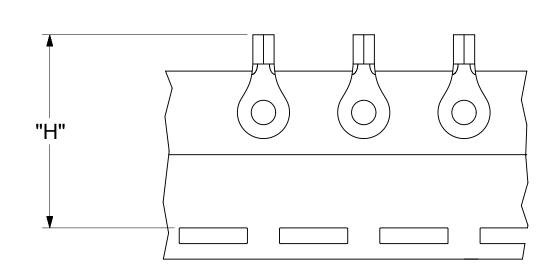

| | • | | | | - | • | | | | | i. | • | | | | | | , . • | n, | | • | | |
|-------------|----------------|-------------|----------------------------|------------------------|--------------------------|---------------|----------------|----------------------|-----------------------|-------------------------|-----------------------|----------|----------------------|-------|----------|----------|----------|----------|---------------|---------------|-----------------------------|------------------------------|---------------|
| | 1 1 | FRAC. DEC. | UNLESS OTHERWISE SPECIFIED | DIMENSIONAL TOLERANCES | C-T-340- | C-T-336- | C-T-330- | C-T-328- | C-T-301- | PART NUMBER | • | 38 = 390 | 14 = 265 56 = 328 | · · · | 06 = 173 | e II. | 02094 | FUD SIZI | | P APAZED SEAM | PLATING: WATTS BATH | MAT'L: COPPER (STOCK TKN 040 | NOTES: |
| | 1+ | ANG. | SPECIFIED | RANCES | .592 15.04 | .282 | .530 13.46 | .375 9.53 | .750 19.05 | ‴₩″ ±.010 | | | | | | 413=,413 | 209=.209 | :(±.005) | MAX OPERATING | | WATTS |)PPER (S | |
| | | | | REFERENCE | .468 11.89 | .306 7.77 | .393 9.98 | . <u>303</u> 7.70 | <u>.611</u> 15.52 | [~] с″ | MENSIO | | | | | | | | RATING | | BATH | TOCK | |
| | APPRD. | CHKD. BY: | DRWN. | | <u>1.056</u> 26.82 | .741 18.82 | .952 24.18 | .785 19.94 | <u>1.280</u> 32.51 | °∟″ мах. | ALL DIMENSIONS= MM | | | | | | | | TEMP | | NICKLE (.0002 Man) .128 MIN | TKN 04 | 14 |
| | BY: | BY: 67 | . вү: JJ | SLN | | | | | | | | 1) | | | | | | | | | (,0002 I | ୍ <u>ଏ</u> ୦ | .001 |
| - - - | | 7 11-30-84 | | DATE | 8 - F | | | | | | | | | | | | | | | с, С | SI. (NEK | | |
| | | <u>1.84</u> | 3·84 | TE TITLE: | | | | | | | | | | | - | .245 | | | | 5 | | | |
| | | | TEMPLES RA | | 10, 14, 56, 38, 209, 413 | 04,06,08 | 10, 14, 56, 38 | 04,06,08,10,209 | 14,56,38,76,12 | AVAILABLE STUD SIZES | | | | | | - | | | | | 1 | | FILE NO. |
| | DWG A CUSTOMER | | INCONTONATIO | | | | | | | | WIRE SIZE: 40-6.0 MM2 | | | | | | | STUD W | | | | | C-T-CD-301-01 |

· · •

i.

٠

.