

THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.

| Å | |
|---|--|
| | |

| ISSUE NUMBER | |
|--------------|--|
| ORIGINAL | |

(1)

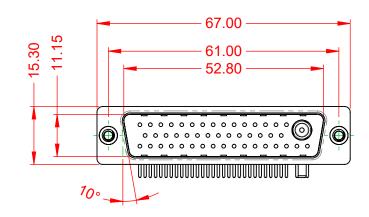




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING: (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX. **INSULATOR RESISTANCE:** 5000MΩ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05


DIELECTRIC WITHSTANDING VOLTAGE:

OPERATING TEMPERATURE:

20A (CURRENT)

-55°C ~ 125°C

1000V AC rms



| | COMBINATION D-SUB | | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | | |
|--|--------------------|--|--|--------------------------------------|-----------------|--------------------|-------|
| | | | | DRAWN: C.B | | DATE: JAN. 01/2019 | |
| | | | | CHECKED: | | DATE: | |
| | | EDAC INC TORONTO, ONTARIO CANADA | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: (| (IN C.A.D. 1:1) | SHEET 1 OF | 2 |
| | | | | DRAWING N | NUMBER: 629-47W | 1640-2TA | ISSUE |
| | YOUR CONNECTION TO | QUALITY & SERVICE | | PART NUME | BER: 629-47W | 1640-2TA | 1 |



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

