


THIS IS A C.A.D. GENERATED DRAWING TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



**ISSUE NUMBER** 

ORIGINAL


(1)



NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ GOLD PLATED

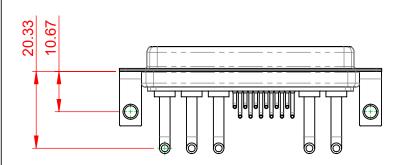

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

COMPLIANT

-55°C ~ 125°C **OPERATING TEMPERATURE:** 

.X ±0.25 .XX ±0.13


.XXX ±0.05

POWER/CO-AX CONTACT RATING: 20A (CURRENT) (IF PRESENT)

SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.

**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE: 5000MΩ min.

1000V AC rms



			SW REFERENCE NO.: 630 COMBO ASSEMBLY				
	COMBINATION	)-SUB	DRAWN: C.B		DATE: JAN. 01/2019		
			CHECKED:		DATE:		
	EDAC INC TORONTO, ONTARIO CANADA	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.A.D. 1	:1)	SHEET 1	OF 2	
			DRAWING NUMBER: 630-17W5		5650-2T4	ISSUE	Ξ
YOUR CONNECTION TO	QUALITY & SERVICE		PART NUMBER:	630-17W	5650-2T4	1	

