




Data sheet | Item number: 756-5311/040-015

Sensor/Actuator cable; M12A plug; straight; 4-pole; Length: 1.5 m

www.wago.com/756-5311/040-015



i Picture differs from the item.

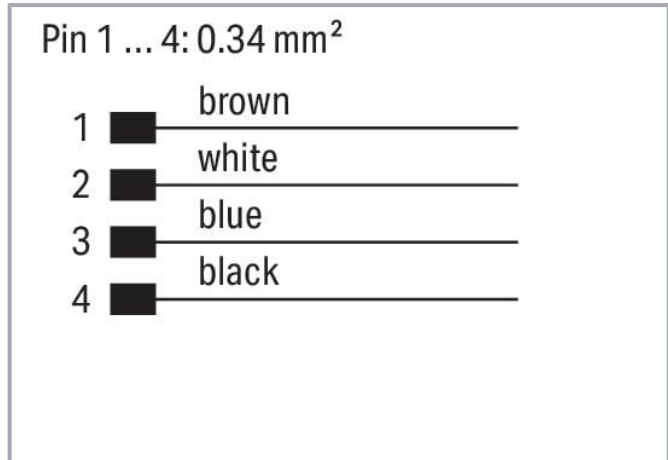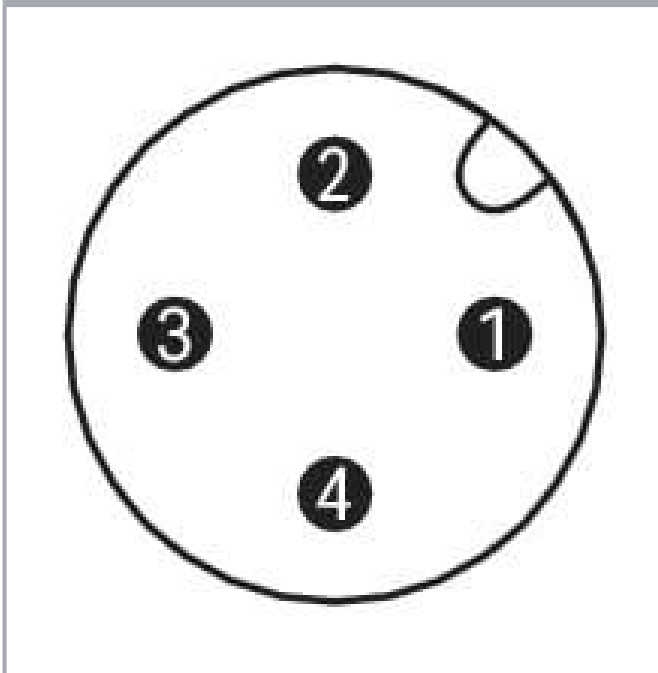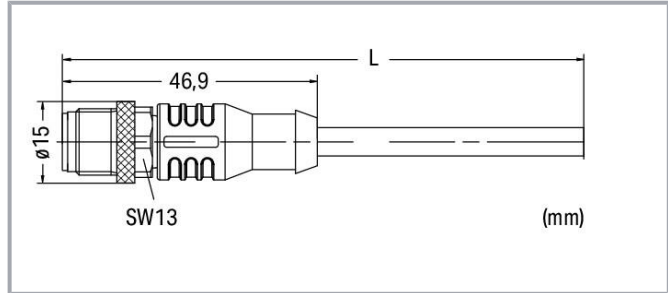

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	1.5 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.5 ... 4.9 mm

Connector

Connection type	M12 plug - free end
Cable connection direction to mating direction	0°
Connector interface coding (cable/adaptor) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454942090
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	085b2ff8-87cd-4e94-b2c5-b5ff1f9d0d52
SCIP notification number (Belgium)	20a5f894-e3a1-4fe8-b36f-37897583ab26
SCIP notification number (Bulgaria)	e6240a9c-e335-46df-be33-7903945239ae
SCIP notification number (Czech Republic)	a4a2e52e-ae3d-4a8a-ba00-5ef02ff52a74
SCIP notification number (Denmark)	68059538-ea1b-4a71-9d12-fcf4d16b4730
SCIP notification number (Finland)	1cc2ef3c-d8a1-4928-b717-778794a7513c

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	d5f35c4d-48fd-4c0f-9560-c4282a4f1ae1
SCIP notification number (Germany)	034c1858-6103-4893-8ad4-e31da07e6cf6
SCIP notification number (Hungary)	3f981de8-c034-4c33-b8a4-e2a0fcec38ad
SCIP notification number (Italy)	edd05969-0b29-459f-9263-ebcaa9b2ff2f
SCIP notification number (Netherlands)	809860b1-4e40-4c30-9381-8c01cfbfb8a
SCIP notification number (Poland)	9cdadf35-0ac8-4e82-b41b-4acbf8db2744
SCIP notification number (Romania)	3dba7ac5-8e7d-4f77-8bca-a904a861b20f
SCIP notification number (Sweden)	1147aa1a-76a0-4843-aae7-aa9009f0dd3f

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5311/040-015 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5311/040-015 doc - Datei	2017 Sep 20	doc 26.6 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5311/040-015	URL	Download
WSCAD Universe 756-5311/040-015	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5311/040-015	URL	Download
Sensor/Actuator cable; M12A plug; straight; 4-pole; Length: 1.5 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.