

<u> </u>	دی ا	 111	



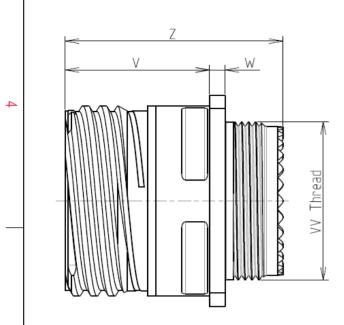

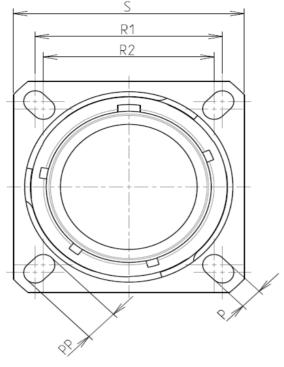

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 09

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	_: -65°C to +175°C			
-Salt Spray	: 500 hours			
	-Shell Plating -Insulator -Contacts -Seals & Grommet -Contact Plating -Durability -Delivered with Souriau -Temperature Range			

: 10.45 g ± 10%

8D 0

G

09

-

W

Dim	Nominal
Р	3.25±0.2
PP	5.49±0.2
R1	18.26
R2	15.09
S	23.8±0.3
V	20.83+0/-1.25
W	2.1/2.5
Z	31.5 Max
VV THREAD	M12x1-6g

т (п	D	0	Φ	A	
S R1 R2 C C C C C C C C C C C C C C C C C C			T SHOWN AS EXAMPLE		4
Keying Shown as example					
Connector dimension Dim Nominal P 3.25±0.2 PP 5.49±0.2 R1 18.26 R2 15.09 S 23.8±0.3 V 20.83+0/-1.2 W 2.1/2.5 Z 31.5 Max VV THREAD M12x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) <u>Country</u> Jurisdiction & Control List <u>FR</u> Not Listed PN: 8D009W98SC				
	A 03-:	10-2016 First Release			
	ISS I Designed By:	DATE Latest modification - b Date:		MOD N°	
	ТІТІ	TITLE Aluminium Receptacle 8D series			
98 S C	SCALE		General linear Tolerances: ±	NPRDS / PROJECT 859	1
CONTACT TYPE : SOCKE	T(500 Matings)	RIAU WWW.SC	URIAU.COM	This document is the property of SOURIAU it must not be reproduced or communicated without permission	
CONTACT I	AYOUT : 09-98			SHEET 1/2	
F E	D	C C	3D009W98SC-C B	A	

r	Ŧ	۵	ات	m		0	
		Contact Layout					Panel Cutou
4	-X				A	SQUARE FLANGE RECEPTACLE (T' REAR MOUNTING	YPE 0)
	Shell Arrangement Numb size No. Conta 9 -98 3	n X-axis Y-axis (mm) (mm) +065 (1.65) +038 (0.97) +.000 (0.00)075 (1.91) 065 (1.65) +.038 (0.97) er of Size Service Contact Supersedes acts contacts rating location					ØA
ω							Dim ØA ØAA R1 ØT
	F					SOURIAU shall no	at he liable for an
						due to a use o the Specifications i	f the Products wh ssued by either of nal recommendat
N						PI	Countr FR N: 8D009V
					A 03-10-20 ISS DATE Designed By:	16 First Release Latest modification Date:	- by
					TITLE		Aluminium
_					SCALE NA		General linear Tolerances: ±
					SOURIA	U www.s	Souriau.c
					FORMAT A3		SOURIAU 8D009W
L	Н	G	F	E	D	С	

