
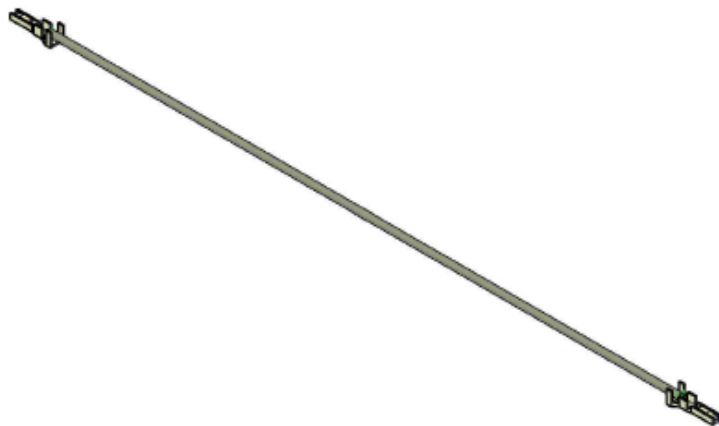


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

4		3		2		1	
ITEM	CONNECTOR PART NO.	DESCRIPTION	IPI CHECK	EOR CHECK	Applicable Tooling		
1	SSUH-003T-P0.15	SUH CONNECTOR CONTACT			APPLICATOR		
2	UL1571 (0.58 OD), 28 AWG	WHITE			Applicable Housings		

NO. OF CIRCUITS	HOUSING PART NO. WITH PROTRUSIONS	HOUSING PART NO. WITHOUT PROTRUSIONS
2	SUHR-02V-S-B	SUHR-02V-S
3	SUHR-03V-S-B	SUHR-03V-S
4	SUHR-04V-S-B	SUHR-04V-S
5	SUHR-05V-S-B	SUHR-05V-S
6	SUHR-06V-S-B	SUHR-06V-S
10	SUHR-10V-S-B	SUHR-10V-S
12	SUHR-12V-S-B	SUHR-12V-S
14	SUHR-14V-S-B	SUHR-14V-S
16	SUHR-16V-S-B	SUHR-16V-S
20	SUHR-20V-S-B	SUHR-20V-S

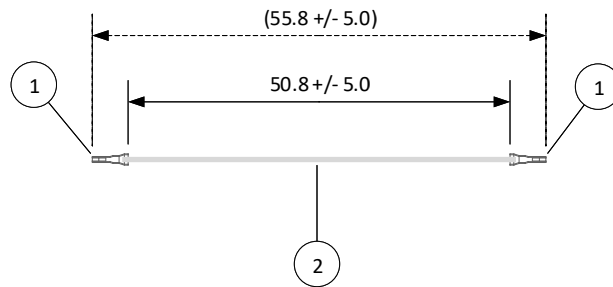

JST

SCALE	CUSTOMER NAME	CUSTOMER PART NO.
1:1		
DIMENSIONS All dimensions are in MM with a tolerance of +/- 3.0 unless otherwise specified.	DESCRIPTION 0.8 mm Pitch SUH Series Standard Leads - 2" Inside Length DOUBLE-END LEADS	
DRAWN BY STEVEN PILKINGTON	ASSEMBLY PART NO. ASSUHSSUH28W51	
CHECKED BY JUSTIN BAKER	DRAWING NO. & REVISION GAM-184	REVISED 6/7/2016

REV.	DESCRIPTION	DATE	BY

4

3

2

1

D

D

C

C

B

B

A

A