

Ratings

Voltage: 300 V

Temperature

Static: -40 ~ 105 °C

Dynamic: -20 to 105 °C

Flammability: VW-1

Water resistant: 75 °C

Oil resistant: 60 °C (jacket)

≥50% elongation and tensile strength after aging

UV resistance: jacket, 720 hours xenon or carbon arc exposure

≥80% tensile strength and elongation after aging

Conductor

Conductor count: 2

Gauge: 28 AWG 0.09 mm²

Material: tinned copper strands

Strand size: Ø 0.127 mm x 7

Resistance at 20 °C: 239 Ω /km Max

Insulator

Material: PVC

Color: red, black

Diameter: Ø 1.2 ±0.10 mm

Nominal thickness: 0.38 mm

Resistance at 20 °C: 10 MΩ /km Min

Drain

Stranding: Ø 0.127 mm x 7

Material: tinned copper strands

Shield

Type: aluminum mylar + tinned copper braid

Coverage: 65% min braid, 100% foil

Braid stranding: Ø0.10 mm

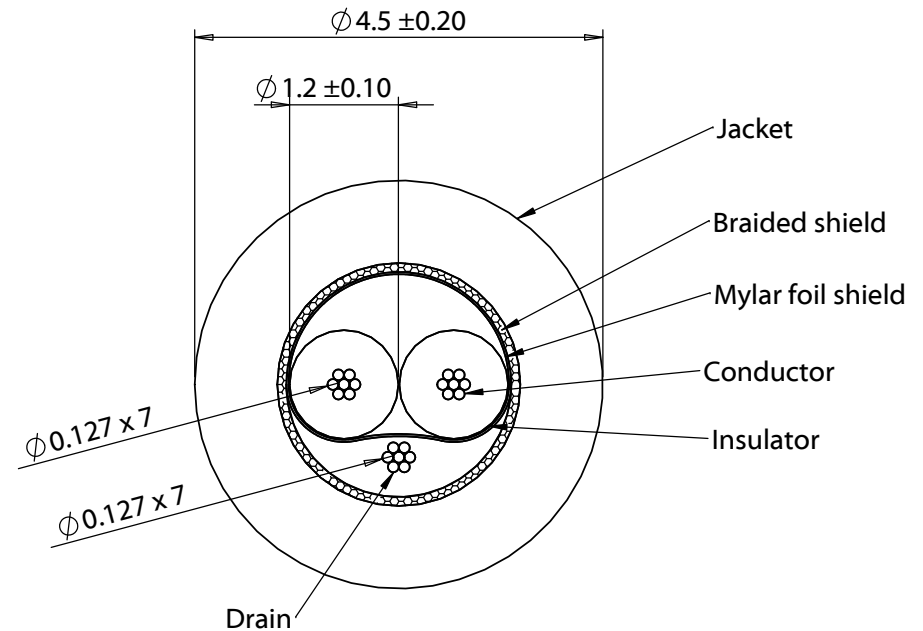
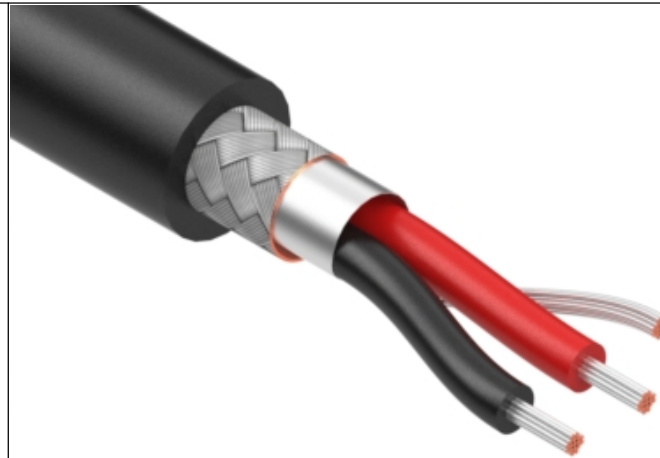
Outer jacket

Material: PVC, 80A

Color: black

Diameter: Ø4.5 ±0.20 mm

Nominal thickness: 0.80 mm

Wire marking: E339579 UL AWM STYLE 20387 28 AWG 105°C
300V VW-1 60°C OIL RESISTANT UV RESISTANT TENSILITY**Use:** External wiring

| | | | | | |
|-----------|-----------|-----------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Revision: | Date: | Description: | Prepared: | Notes: | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 8/25/2020 | Initial release | Verified: | RoHS compliant Function test: no open, no short circuit, no intermittent | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Wire, 2C TS, 28 AWG, UL20387, 300V, 105C, 60C oil, UV, 4.5 mm, shielded, VW-1, PVC, 80A, black | Size: A Part number: 30-01565 |
| | | | | | Scale: 12:1 Sheet 1 of 1 |

5

4

3

2

1