



| ┵ |
|---|

| ISSUE NUMBER | |
|--------------|---|
| ORIGINAL | 1 |

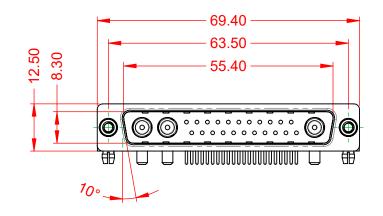




NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED



| OPERATING TEMPERATURE: | -55°C ~ 125°C |
|--|-----------------------------|
| POWER/CO-AX CONTACT RATING: (IF PRESENT) | 20A (CURRENT) |
| SIGNAL CONTACT CURRENT RATING: SIGNAL CONTACT RESISTANCE: | 5A PER CONTACT 10mΩ MAX. |
| INSULATOR RESISTANCE: DIELECTRIC | $5000M\Omega$ min. |

.XX ±0.13 .XXX ±0.05



| | COMBINATION D-SUB | | | SW REFERENCE NO.: 629 COMBO ASSEMBLY | | | |
|-----------------------|--------------------------------------|--|-------------------|--------------------------------------|-----------|----------|-------|
| C | | | | | DATE: JAN | N. 01/20 | 19 |
| | | | | | DATE: | | |
| | EDAC INC | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION. | SCALE: (IN C.A.D. | 1:1) | SHEET 1 | OF | 2 |
| | YOUR CONNECTION TO QUALITY & SERVICE | | DRAWING NUMBER: | 629-25W3 | 3240-2N5 | | ISSUE |
| YOUR CONNECTION TO QU | | | PART NUMBER: | 629-25W3 | 3240-2N5 | | 1 |

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

| E | | A | C | EDAC TORONTO, CANA |
|------|------|------|--------|--------------------------|
| YOUF | R CO | NNEC | TION T | O QUALITY & S |
| | | | | |

WITHSTANDING VOLTAGE:

