TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25


.XX ±0.13

.XXX ±0.10


THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.





ISSUE NUMBER
ORIGINAL

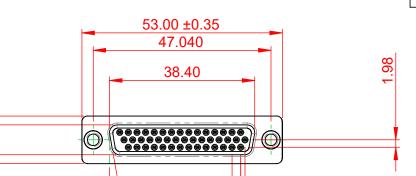

1.143 2.29



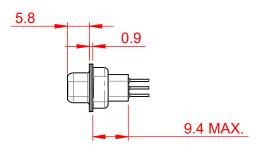



NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY,  $30\mu$  GOLD PLATED

OPERATING TEMPERATURE: -55°C TO 125°C

CURRENT RATING: 3A PER CONTACT

CONTACT RESISTANCE:  $25m\Omega$  MAX. INSULATOR RESISTANCE:  $5000M\Omega$  min.

**DIELECTRIC** 

WITHSTANDING VOLTAGE: 1000V AC rms

## 638 SERIES D-SUB CONNECTOR



EDAC INC
TORONTO, ONTARIO
CANADA
CHALTY & SERVICE

EDAC INC
ARE THE PROPER
SHALL NOT BE RE
OR USED AS THE I
MANUFACTURE OF

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 628 ASSEMBLY	
	DRAWN: C.B	DATE: AUG. 01/2018
	CHECKED:	DATE:
	SCALE: 1:1	SHEET 1 OF 1
	DRAWING NUMBER: 629 044 621 271	

 DRAWING NUMBER:
 638-044-631-271
 ISSUE

 PART NUMBER:
 638-044-631-271
 1



12.60

8

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

10°